



## Adhesives & Sealants

### A

#### Adhesives

- DriveGrip Anti Cam-Out Fluid SA-17
- Loctite
  - 401 Prism Instant Adhesive SA-3
  - Depend 330 Instant Adhesive SA-3
  - Quicktite SA-3
- Multi-Purpose Adhesive SA-20
- Spray Adhesive SA-33

#### Aerosols

- Rapid Gasket SA-38
- Spray Adhesive SA-33

#### Anti-Seize

- Anti-Seize Gel Aluminum Formula SA-11
- Anti-Seize Gel Copper Formula SA-11

#### Anti-Seize & Lubricants

- AS022 Anti-Seize SA-18
- C5A Copper Based Anti-Seize SA-5
- C5A Copper Based Anti-Seize"Quick Stix" SA-5
- Dielectric Grease SA-5
- Marine Grade Anti-Seize SA-5
- White Food Grade Anti-Seize SA-5

#### Assortments

- Adhesives
  - Drive Grip & Insert bits SA-17
  - DriveGrip & Nutserts SA-17
- Epoxy Products
  - 2-Part EZ-Epoxy Sticks SA-32
- Loctite
  - Loctite 10ml Threadlocker SA-14
  - Loctite 10 ml Travel Tray SA-13, SA-14
  - Loctite Glues & Epoxies SA-4
  - Loctite Quick-Stix Assortment SA-10, SA-13, SA-14, SA-15
  - Loctite RTV Tubes SA-7
  - Loctite Threadlocker Assortment SA-7, SA-14
- Thread Locker, Anti-Seize & Dielectric Grease Assortment & Travel Tray SA-11
- Threadlockers
  - NO MESS Threadlocker Travel Tray SA-10

### E

#### Epoxy Products

- Assortments
  - 2-Part EZ-Epoxy Sticks Assortment SA-32
- EZ-Poxy Aluminum SA-29
- EZ-Poxy Aqua SA-26
- EZ-Poxy Concrete SA-31
- EZ-Poxy Plastic SA-30
- EZ-Poxy Steel SA-27
- EZ-Poxy Wood SA-28
- Fixmaster® 4 Minute Epoxy SA-3
- Fixmaster® Fast Set Steel Epoxy SA-3

### L

#### Loctite Products

- Adhesives & Epoxies
    - 401 Prism Instant Adhesive SA-3
    - Depend 330 Instant Adhesive SA-3
    - Fixmaster® 4 Minute Epoxy SA-3
    - Fixmaster® Fast Set Steel Epoxy SA-3
    - Quicktite SA-3
  - Anti-Seize & Lubricants
    - C5A Copper Based Anti-Seize SA-5
    - C5A Copper Based Anti-Seize"Quick Stix" SA-5
    - Dielectric Grease SA-5
    - Marine Grade Anti-Seize SA-5
    - White Food Grade Anti-Seize SA-5
  - Assortments
    - Loctite Quick-Stix Assortment SA-10, SA-13, SA-14, SA-15
    - Loctite Threadlocker Assortment SA-7, SA-14
  - Gasketing & Sealing
    - Loctite 515 Purple Gasket Eliminator SA-6
    - Loctite 518 Red Gasket Eliminator SA-6
    - Loctite 548 Gasket Eliminator Flange Sealant "Quick Stix™" SA-6
    - Loctite 5699 Grey High Performance RTV Silicone Gasket Maker SA-7
  - Properties Chart SA-6, SA-7
  - Superflex Red High Temp RTV SA-7
  - Superflex RTV Black SA-6
  - Superflex RTV Blue SA-6
  - Superflex RTV Clear SA-6
  - Superflex RTV White SA-6
- #### Primers
- 7649™ Primer N™ SA-13
- #### Retaining
- 609 Retaining Compound SA-8
  - 620 Retaining Compound SA-8
  - 660 Quick Metal Retaining Compound SA-8
  - 668 Retaining Compound High Temperature SA-8
- #### Threadlocking
- 242 Threadlocker SA-9
  - 243 Threadlocker SA-9
  - 248 Threadlocker "Quick Stix" SA-9
  - 249 QuickTape Threadlocker SA-9
  - 262 Threadlocker SA-12
  - 263 Red High Strength Oil-Resistant Threadlocker SA-12
  - 268 Threadlocker SA-12
  - 272 Threadlocker SA-12
  - 290 Threadlocker SA-12
  - 2760 Threadlocker SA-13
  - 7649 Primer N™ SA-13
- #### Thread Sealing
- 545 Hydraulic/Pneumatic Thread Sealant SA-15
  - 561 PST Thread Sealant "Quick Stix" SA-15
  - 565 PST Thread Sealant SA-15, SA-16



567 PST Thread Sealant SA-16  
 No More Leaks™ SA-16  
 Thread Sealant with PTFE SA-16  
 Tight Anaerobic Gel SA-16

### Lubricants

Anti-Seize  
 Anti-Seize Gel Aluminum Formula SA-11  
 Dielectric Grease Pump SA-11

### M

### Metalink

Accelerator SA-20  
 Anti-Seize (AS022) SA-18  
 Blu-Goo SA-19  
 Brushable Ceramic SA-21, SA-22  
 Debonder SA-20  
 Dillo Hyde™ Wear Systems  
 Ceramic Hexagonal Wear Plates SA-24  
 Seal-Skin SA-25

### Miscellaneous

Shur-Shot Dispensing Gun SA-4  
 Static Mixers SA-4

### R

### R.T.V. Gasket Maker & Sealers

Black SA-34  
 Clear SA-34  
 Comparison Test SA-35  
 Hi-Temp Red SA-36  
 Low Volatite Blue SA-37  
 SuperFlex RTV Silicone SA-6

### S

### Sealants

EZ-Poxy Aluminum SA-29  
 EZ-Poxy Aqua SA-26  
 EZ-Poxy Plastic SA-30  
 EZ-Poxy Steel SA-27  
 EZ-Poxy Wood SA-28  
 Loctite  
 545 Hydraulic/Pneumatic Thread Sealant SA-15  
 561 PST Thread Sealant "Quick Stix" SA-15  
 565 PST Thread Sealant SA-15  
 567 PST Thread Sealant SA-16  
 No More Leaks™ SA-16  
 Thread Sealant with PTFE SA-16  
 Tight Anaerobic Gel SA-16

### Metalink

Anti-Seize (AS022) SA-18  
 Blu-Goo SA-19  
 Pipe Thread Sealant Gel with PTFE SA-11

Pressurized Tube  
 R.T.V. Gasket Maker & Sealer SA-34  
 R.T.V. Hi-Temp Red SA-36  
 R.T.V. L. V. Blue SA-37

### T

### Technical Information

Metalink  
 Brushable Ceramic SA-21, SA-22

### Threadlockers

Pipe Thread Sealant Gel with PTFE SA-11  
 Threadlocker Gel  
 High Strength Red SA-10  
 Medium Strength Blue SA-10

### Tools & Parts

Replacement Parts  
 Plunger for Shur-Shot Dispensing Gun SA-4  
 "Shur-Shot" Dispensing Gun SA-4  
 Static Mixers SA-4

### Adhesives & Epoxies

#### Depend 330 Adhesive No Mix Kit

**IBS No. 20251 - 25 ml. syringe kit**

Adhesive sets in just minutes to a tough acrylic adhesive with high peel and impact strength. Bonds almost all combinations of materials, including glass. No-mix kit includes activator and adhesive.



#### Loctite 401 Prism Instant Adhesive

**IBS No. 40140 - 20g**

Designed for the assembly of difficult-to-bond materials which require uniform stress distribution and strong tension and/or shear strength. This surface insensitive product provides rapid bonding of a wide range of materials, including metals, plastics and elastomers. Also suited for bonding porous materials such as wood paper, leather and fabric.



#### Fixmaster® Fast Cure Epoxy Cups

**IBS No. 21426 - (10) 1oz. cups**

**IBS No. 21425 - (10) .12 oz. cups**

Premeasured epoxy mixer cups. Bonds in 5-15 minutes. Excellent chemical resistance. Fills porosities and can be used to build up worn parts. Ideal for bonding glass, hard plastics, rubber, and metal.



#### Fixmaster® Fast Set Steel Epoxy

**IBS No. 96604 - 50 ml. cartridge**

Steel filled. Reaches functional cure in 10 minutes. Temperature resistant up to 200°F. Recommended for repairing pipes and other equipment that must be back in service in minutes. Cartridge requires manual dispensing gun.



#### Fixmaster® (Clear) 4 Minute Epoxy

**IBS No. 97434 - 50 ml. cartridge**

Translucent, gel-like adhesive. Sets up in 4-6 minutes. Temperature resistant up to 160°F. Ideal for emergency repairs or where reduced fixturing time is desirable. Cartridge requires manual dispenser gun.



#### Fixmaster® (Clear) Poxy Pak

**IBS No. 81120 - 1 oz syringe**

This faster cure, general purpose epoxy bonds virtually any material. It will also fill or seal cracks and rebuild worn surfaces. Comes in a 1 oz. syringe with a built-in plunger for easy dispensing without equipment. Sets in 5 minutes.



#### Quicktite

**IBS No. 39202 - 0.14 oz. bottle**

A general purpose instant adhesive featuring an innovative precision flow control applicator. This new, patented, "squeeze grip" applicator allows for pinpoint control of the exact amount and placement of the adhesive. It is also designed to be clog-free, so the adhesive is always ready to use.





# IBS, INCORPORATED

## Loctite Products S08

### Adhesives & Epoxies



### “Shur-Shot” Dispensing Gun

IBS No. EQ016

Also works with LOCTITE 2-Part CLEAR (97434) and FAST SET STEEL (96604)

### Static Mixers

IBS No. EQ115

Also works with LOCTITE 2-Part CLEAR (97434) and FAST SET STEEL (96604)



Replacement Parts:  
Plunger for Shur-Shot Dispensing Gun

IBS No. 128405

### Assortments (Z02)

### Loctite Glues & Epoxies Assortment

IBS No. 674R • 8 Items • 22 Pieces

Packaged in a Locking Steel Drawer for Easy Storage & Organization

 <b>IBS, Inc.</b> <small>SPECIALTY PRODUCTS FOR MAINTENANCE &amp; REPAIR          INDUSTRIALDOLY.COM © 2013 800-678-1906</small>		<b>Loctite Glues &amp; Epoxies</b> Assortment No. 674R	
39202 LOCTITE QUICKTITE INSTANT 	74510 MULTI-PURPOSE ADHESIVE 3.7 OZ E6000 	97434 FIXMASTER 2 PART 4 MINUTE 	EQ115 STATIC MIXER 
20251 LOCTITE 330 DEPEND ADHESIVE 	21425 LOCTITE .12 OZ FAST CURE 	96604 LOCTITE FIXMASTER FAST SET 	EQ016 DISPENSING GUN 

A  
D  
H  
E  
S  
I  
V  
E  
S

## Anti-Seize & Lubricants



### C5A Copper Based Anti-Seize

**IBS No. 51007 - 1 lb. brush top can**

Exclusive formula suspends copper and graphite in a high quality grease. Protects metal parts from rust corrosion, galling and seizing at temperatures to 1800°F (982°C). Tested to MIL-PRF-907-E. CFIA Approved.



### C5A Copper Based Anti-Seize "Quick Stix"

**IBS No. 37229 - 19 grams**

The same trusted performance characteristics as the Loctite C5-A Copper Based Anti-Seize paste in a convenient semi-solid stick form. Stick package offers more portability and less mess. Qualified to performance requirements of MIL-PRF-907E and CFIA approved.



### White Food Grade Anti-Seize

Metal Free

**IBS No. 51168 - 8 oz. brush top can**

Prevents seizure, galling and friction in stainless steel and other metal parts up to 750°F (400°C). NSF H1 approved for incidental food contact.



### Dielectric Grease

**IBS No. 37535 - 3 oz. tube**

Provides a moisture-proof barrier that lubricates and protects electrical equipment from salt, dirt and corrosion. High dielectric strength. Good thermal, oxidation, and chemical stability.

*Additional sizes available  
as non-stock items*



### Marine Grade Anti-Seize

**IBS No. 34026 - 16 oz. brush top can**

Formulated to protect assemblies exposed directly or indirectly to fresh and salt water, this anti-seize works especially well in high humidity conditions. It has excellent lubricity, superior water resistance, and prevents galvanic corrosion. ABS Approved.

**FOR INDUSTRIAL / PROFESSIONAL USE ONLY**

**KEEP OUT OF REACH OF CHILDREN**

**ALWAYS READ LABEL FOR COMPLETE DIRECTIONS AND PRECAUTIONS**



# IBS, INCORPORATED

## Loctite Products S08

### Gasketing & Sealing

ADHESIVES



### Loctite 515™ Purple Gasket Eliminator

**IBS No. 51531 - 50 ml tube**

Recommended for use on rigid iron, steel and aluminum flanges (aluminum gearbox and engine castings, etc.) Easy disassembly and cleaning. Gasketing product for machined metal flanges. Medium strength. 30 minute fixture time.

- Ideal for machined metal components.
- Forms a perfect seal between components.
- For gaps up to 0.25 mm.



### Loctite 518™ Red Gasket Eliminator

**IBS No. 51831 - 50 ml tube**

Medium-strength, general purpose gasketing product - excellent contamination tolerance. Ideal for use on cast iron, steel and aluminum flanges. Cures when confined in the absence of air between close-fitting metal surfaces. Designed for use on rigid iron, aluminum, and steel flanged mating surfaces. Fills gaps up to 0.25mm and forms a flexible, chemical-resistant seal that will not tear or decay. Parts disassemble easily, even after extended service. Typical applications include sealing close-fitting joints between rigid metal faces and flanges. It is also used as a formed-in-place gasket on rigid flanged connections, e.g. transmissions and motor housings.

#### Benefits vs. Cut Gaskets:

- Reduces inventory costs — no need for large inventory of cut gaskets.
- Resists high pressure when fully cured.
- No compression set or misaligned gaskets.



### Loctite 548™ Gasket Eliminator Flange Sealant "Quick Stix™"

**IBS No. 39152 - 18 gm stick**

Patented semi-solid formula is ideal for on the spot repairs, or when a conventional gasket is out-of-stock. Can be applied neatly and quickly on a variety of metal surfaces, including aluminum, to form a flexible, solvent resistant seal. Seals to 300°F (149°C) and fills gaps to 0.010".

### Superflex™ RTV Silicone Adhesive Sealants

<b>CLEAR</b>	<b>IBS No. 59530 - 80 ml tube</b>	<b>59575 - 300 ml cartridge</b>
<b>BLACK</b>	<b>IBS No. 59330 - 80 ml tube</b>	<b>59375 - 300 ml cartridge</b>
<b>BLUE</b>	<b>IBS No. 30560 - 80 ml tube</b>	<b>30533 - 300 ml cartridge</b>
<b>WHITE</b>	<b>IBS No. 59430 - 80 ml tube</b>	<b>59475 - 300 ml cartridge</b>



- This silicone product has excellent adhesion to most substrates.
- Key features are resistances to extreme thermal and UV cycling without hardening, shrinking or cracking.
- -65°F to 500°F
- Tack Free — 30 Min. / Full Strength: 24 hrs.

**FOR INDUSTRIAL / PROFESSIONAL USE ONLY**

**KEEP OUT OF REACH OF CHILDREN**

**ALWAYS READ LABEL FOR COMPLETE DIRECTIONS AND PRECAUTIONS**



### Gasketing & Sealing

## Loctite® 5699™ Grey High Performance RTV Silicone Gasket Maker

IBS No. 18718 - 70 ml tube    IBS No. 40505 - 190 ml cartridge  
 IBS No. 18581 - 300 ml cartridge



- Increased oil resistance for rigid flange assemblies.
- Excellent fluid resistance.
- Easy to dispense.
- Noncorrosive, low odor, low volatility.
- -75°F to 625°F (-59°C to 329°C)
- Tack-Free — 30 Min./ Full Strength — 24 Hrs.
- CFIA Listed.

## Loctite® Superflex® Red High Temp RTV Silicone Adhesive Sealant

IBS No. 59630 - 80 ml tube    59675 - 300 ml cartridge



- Makes gaskets that resist temperatures to 600°F (316°C) intermittent.
- Resists aging, weather and thermal cycling without shrinking, cracking or hardening.
- Fills gaps to 0.25 inches.
- -75°F to 600°F
- Tack-Free — 30 Min. / Full Strength — 24 hrs.
- CFIA Listed.

## Loctite RTV Tube Assortment

IBS No. 776R • 6 Items • 6 Pieces

Packaged in a Locking Steel Drawer for Easy Storage & Organization

IBS, Inc. SPECIALTY PRODUCTS FOR MAINTENANCE & REPAIR INDUSTRIALBOLT.COM • 800-678-1506		Loctite RTV Tube Assortment			
Assortment 776R					
59530 LOCTITE SUPERFLEX 80ML TUBE RTV CLEAR	59430 LOCTITE SUPERFLEX 80ML TUBE RTV WHITE	59330 LOCTITE SUPERFLEX 80ML TUBE RTV BLACK	30560 LOCTITE SUPERFLEX 80ML TUBE RTV BLUE	59630 LOCTITE HI TEMP 80ML TUBE RTV RED	18718 LOCTITE GASKET MAKER 70ML TUBE RTV GRAY



ADHESIVES



# IBS, INCORPORATED

## Loctite Products S08

A  
D  
H  
E  
S  
I  
V  
E  
S

### Retaining



*Additional sizes available  
as non-stock items*

#### Loctite 609™ Retaining Compound

Press Fit / General Purpose

**IBS No. 60931 — 50 ml    IBS No. 60921 — 10 ml**

A low viscosity, fast curing adhesive used for bonding rigid metal assemblies. Ideal for gap distances up to 0.005" (0.13mm). Loctite 609™ fixtures in just 10 minutes and provides shear strength of 3,000 psi after 24 hours. It easily joins dissimilar metals and withstands temperatures up to 300°F (149°C).



*Additional sizes available  
as non-stock items*

#### Loctite 620™ Retaining Compound

Slip Fit / High Temperature

**IBS No. 62040 — 50 ml    IBS No. 62015 — 10 ml**

A high temperature adhesive that has the capability to operate at 450°F (232°C) for long periods. Fixes in 30 minutes at room temperature, but requires a secondary heat cure to generate the high temperature resistance. Used to bond cylindrical parts with gaps up to 0.015" (0.35mm). Loctite 620™ provides a shear strength of 3,800 psi on steel after 24 hours. Ideal for use on retaining bushes, bearings, seals, fans and liners.



*Additional sizes available  
as non-stock items*

#### Loctite 660™ Quick Metal Retaining Compound

Press Fit Repair

**IBS No. 66010 — 6 ml tube**

A creamy, non-running gel that is applied onto cylindrical parts to fill surface imperfections and repair worn areas. It contains no metal, but once assembled hardens to a strength that often doubles that of a press fit. Use to salvage worn metallic parts, or to keep machinery running until new parts arrive. Use to 300°F (149°C)



#### Loctite 668™ Retaining Compound High Temperature "Quick Stix"

General Purpose

**IBS No. 39148 — 19 gm stick**

A high temperature retaining compound in a revolutionary semi-solid formula. Patented, no-mess package offers added convenience and portability. Ideal for gaps up to 0.005" on the diameter. Withstands temperatures to 400°F (204°C).

**FOR INDUSTRIAL / PROFESSIONAL USE ONLY**

**KEEP OUT OF REACH OF CHILDREN**

**ALWAYS READ LABEL FOR COMPLETE DIRECTIONS AND PRECAUTIONS**



### Thread Locking



#### 242™ Threadlocker

Medium Strength / Removable / Blue

**IBS No. 24231 — 50 ml IBS No. 24221 — 10 ml**

A removable strength, general-purpose thread locking adhesive especially well-suited for fasteners between 1/4" and 3/4" diameter (6 to 20mm). Applied to threaded components before assembly, Blue 242 has controlled lubricity for accurate clamp loads. Parts can be separated using hand tools.

*Additional sizes available as non-stock items*



#### 243™ Threadlocker

Medium Strength / Oil Resistant  
Removable / Blue

**IBS No. 24078 — 50 ml IBS No. 24310 — 10 ml**

A general purpose, medium strength threadlocker with improved oil tolerance. Suitable for 1/4" to 3/4" diameter (6mm to 20mm) fasteners. Cure speed: Fixture - 5 minutes, Full — 24 hrs. Temperature Range: -65°F to 300°F (-54°C to 150°C)

*Additional sizes available as non-stock items*



#### 248™ Threadlocker "Quick Stix"

Medium Strength / Removable / Blue

**IBS No. 37087 — 19 grams**

New, patented semi-solid stick formula offers added convenience and portability. Like Loctite® 242®, this threadlocker stick is well suited for 1/4" to 3/4" (6 to 20mm) fasteners and is removable with hand tools. The semi-solid formula also means it won't spill or leak.



#### 249™ QuickTape Threadlocker

Medium Strength / Blue

**IBS No. 1372603**

Designed for the locking and sealing of threaded fasteners which require normal disassembly with standard hand tools. The product cures when confined in the absence of air between close fitting metal surfaces and prevents loosening and leakage from shock and vibration. Supplied in a low tack film to provide a convenient and easy to use package, especially where a liquid product may be too fluid to stay on a part or be difficult to apply.



# IBS, INCORPORATED

## Threadlockers S08

### Threadlocker Gel (S04)

**IBS No. 74242 — Blue 35 ml bottle Qty 6/cs**  
**IBS No. 74262 — Red 35 ml bottle Qty 6/cs**



Threadlocker Gel is a better, faster and cleaner way to apply threadlocker to bolts, studs, or anywhere it is needed. The gel goes on without globs or messy drips and waste. Like other threadlockers, **Threadlocker Gel** is a single component, anaerobic gel that cures when confined in the absence of air between close fitting metal surfaces. This product cures rapidly on plated, oily metal surfaces or inactive surfaces. Locks and seals while preventing parts loosening due to vibration. Protects threads from corrosion with good solvent resistance against water and non-polar solvents. Removable with hand tools for easy disassembly.

- Gel Formula provides "liquid-reliability" without drips, globs, mess or waste Gel formula is **thicker than standard threadlockers** and is easier to use on vertical or hard-to-reach applications.
- **Pump dispenser** makes this product easy to dispense with no mess and exceptional control for reduced waste, saving time and money.
- Replaces lock washers and plastic inserts. Locks machine tool access bolts, studs and hydraulic system bolts. Used on gear box bolts / drive shaft, bearing cover capscrews, counter sunk screws, conveyor rolls and construction equipment.
- **Eliminates vibration loosening** for maximum safety keeping equipment and those around it safe from failure.
- **Seals against leakage**, protects against rust and corrosion.
- **Cures without cracking or shrinking** for a stronger hold and more protective seal.
- Color Blue (Medium Strength) and Red (High Strength).
- Gap Fill: 0.0015"
- Max Operating Temp: -65°F to +300°F.
- Full Cure Time: 24 hours @ 68°F

#### **BLUE Cured Performance**

Typical Breakaway Strength: 3/8 Phos-oil 100 - 130 lb-ins.  
 Typical Prevailing Strength: 3/8 Phos-oil 40 - 60 lb-ins.

#### **RED Cured Performance**

Typical Breakaway Strength: 3/8 Phos-oil 150 - 300 lb-ins.  
 Typical Prevailing Strength: 3/8 Phos-oil 100 - 350 lb-ins.

### NO MESS Threadlocker Travel Tray (Z02)

**IBS No. 817R • 4 Items • 4 Pieces**

**Packaged in a clear plastic locking storage container**



ADHESIVES



### Pipe Thread Sealant Gel with PTFE (S04)

IBS No. 74159 — 35 ml    IBS No. 24221 — 10 ml



A better, faster and cleaner way to apply pipe thread sealant to pipe or anywhere it is needed

- An anaerobic pipe sealant that sets fast to give an instant low-pressure seal of 100 psi and a high-pressure seal of 1000 psi and a high-pressure seal when fully cured - up to 10,000 psi.
- This high strength formula contains no solvents, providing a sealing capability of 100% and does not shrink after curing, unlike more traditional solvent-based pipe dopes.
- Contains PTFE which lubricates parts during assembly which allows for faster and easier assembly.
- The curing time allows for realignment of parts up to 24 hours from application.
- Can be used on most hydraulic, pneumatic, oil, water and gas connections.
- **NOT FOR PLASTICS.**

### Thread Locker, Anti-Seize & Dielectric Grease Assortment

IBS No. 833R • 6 Items • 12 Pcs

Packaged in a Locking Steel Drawer for Easy Storage & Organization



ADHESIVES

### Thread Locker, Anti-Seize & Dielectric Grease Travel Tray

IBS No. 832R • 6 Items • 6 Pcs

Packaged in a Plastic Travel Tray for Easy Storage & Organization





# IBS, INCORPORATED

## Threadlockers S08

### Thread Locking

#### 262™ Threadlocker

High Strength / Red

**IBS No. 26231 — 50 ml bottle**    **IBS No. 26221 — 10 ml**

Red 262™ is a high-strength product that is designed for the permanent locking and sealing of threaded fasteners up to 3/4" (20 mm in size before assembly). Localized heating and hand tools are required to separate parts. Solvents will not weaken adhesive bond. Approved for use in or around food processing areas.



#### 263™ Red High Strength Oil-Resistant Threadlocker

High Strength Oil-Resistant / Red

**IBS No. 26331 — 50 ml bottle**    **IBS No. 26321 — 10 ml**

Red 263™ is a high strength product designed for the permanent locking and sealing of threaded fasteners with the added advantage of performing despite the presence of surface contaminants. It not only works on active metals (brass, copper) but also on passive substrates such as stainless steel and plated surface. The product offers high performance and oil tolerance. It tolerates minor surface contaminations from various oils, such as cutting, lubrication anti-corrosion and protection fluids.

Suggested applications: Studs into motor housings, nuts onto studs in pump housings and other fasteners where high strength is required.

- Ideal application: 1/4 - 3/4 bolts with light oil contamination
- Temperature Range: -65°F to 360°F
- Cure Speed: - 5 Min., Full - 24 hrs.



#### 268™ Threadlocker

High Strength / Red

**IBS No. 37686 — 19 grams**

Revolutionary semi-solid stick formula is high strength and best suited for fasteners up to 1" (20mm). Semi-solid formula offers added convenience and portability. Localized heat and hand tools are required to separate parts. Ideal for heavy duty applications.



#### 272™ Threadlocker

High Strength / Red / High Temperature

**IBS No. 27240 — 50 ml bottle**

Withstands temperatures to 450°F. Provides a fast cure on most surfaces, including "as received" fasteners. Recommended for bolts up to 1-1/2" (36mm) in diameter. Heat and hand tools are required for disassembly.

*Additional sizes available as non-stock items*



#### 290™ Threadlocker

Wicking / Green / High Strength

**IBS No. 29031 — 50 ml**    **IBS No. 29021 — 10 ml**

A low viscosity, thread locking liquid, that wicks along the threads of pre-assembled fasteners to secure them in place. Seals porosities in welds and metal parts. Ideal for fasteners ranging from #2 to 1/2" (2.2 to 12mm) in size. Localized heat and hand tools are needed for disassembly. Approved for use in or around food processing areas.



A  
D  
H  
E  
S  
I  
V  
E  
S



### Thread Locking

#### 2760™ Threadlocker

**Primerless / High Strength / Red**

**IBS No. 32525 — 50 ml    IBS No. 32526 — 10 ml**



This threadlocker is particularly fast-curing, thereby reducing or eliminating the need for primers. For use on all metal fasteners where regular removal maintenance is not required. Recommended for permanently locking studs on engine blocks and pump housings.

#### 7649™ Primer N™

**IBS No. 21348 — 4.5 oz. net wt. aerosol can**



Decreases the set-up time of Loctite® brand threadlockers and increases breakaway torque on most fastener surfaces. Allows cold weather application. Contains no ozone-depleting compounds.

NSF spec.      5% Copper

**USE LOCTITE 7649 PRIMER N to:**

1. Activate inactive surfaces.
2. Speed cure times for faster return to service.
3. Speed curing through larger gaps and threads.
4. Substantially speed cure times on cold parts.
5. Act as a cleaning agent.

**Primer is optional with:**

Active surfaces: Brass, copper, bronze, iron, soft steel, nickel.

**Primer is required with:**

Inactive surfaces: Aluminum, stainless steel, magnesium, zinc, black oxide, cadmium, titanium and others.

#### Loctite 10 ml Travel Tray (Z02)

**IBS No. 747R • 6 Items • 6 Pieces**

**Packaged in a plastic locking storage container for easy storage & organization**

IBS, Inc. SPECIALTY PRODUCTS FOR MAINTENANCE & REPAIR INDUSTRIALBOLT.COM © 2008 800-878-1906		Loctite 10 ml Travel Tray				Assortment No. 747R
24221 LOCTITE 242 BLUE REMOVABLE THREADLOCKER 10 ml	24310 LOCTITE 243 BLUE MEDIUM OIL RESISTANT THREADLOCKER 10 ml	26221 LOCTITE 262 RED HIGH STRENGTH OIL RESISTANT THREADLOCKER 10 ml	26321 LOCTITE 263 RED HIGH STRENGTH OIL RESISTANT THREADLOCKER 10 ml	29021 LOCTITE GREEN MEDIUM THREADLOCKER 10 ml	32429 LOCTITE 345 PURPLE HYDRAULIC / PNEUMATIC SEALANT 10 ml	



ADHESIVES



# IBS, INCORPORATED

## Assortments (Z02)

### Thread locking

#### Loctite Threadlocker Assortment

IBS No. 671R • 8 Items • 8 Pieces

Packaged in a locking steel drawer for easy storage and organization


















 <b>IBS, Inc.</b> <small>SPECIALTY PRODUCTS FOR MAINTENANCE &amp; REPAIR  INDUSTRIALBOLT.COM © © © 800-678-1906</small>		<b>Loctite Thread Lockers</b>	
Assortment No. 671R			
<b>37087</b> <b>LOCTITE 19GM BLUE</b>  	<b>37686</b> <b>LOCTITE 19GM RED THREADLOCKER</b>  	<b>51604</b> <b>LOCTITE TIGHT ANAEROBIC GEL</b>  	<b>21348</b> <b>LOCTITE PRIMER-N AEROSOL 4.5OZ</b>  
<b>24231</b> <b>LOCTITE REMOVABLE</b>  	<b>26231</b> <b>LOCTITE HIGH STRENGTH</b>  	<b>29031</b> <b>LOCTITE 50ML GREEN MEDIUM</b>  	<b>27240</b> <b>LOCTITE 50ML HT TEMP HI</b>  



#### Loctite 10ml Threadlocker Assortment

IBS No. 676R • 8 Items • 8 Pieces

Packaged in a plastic locking storage container for easy storage & organization

 <b>IBS, Inc.</b> <small>SPECIALTY PRODUCTS FOR MAINTENANCE &amp; REPAIR  INDUSTRIALBOLT.COM © © © 800-678-1906</small>		<b>Loctite 10ml Threadlockers</b>	
Assortment No. 676R			
<b>37087</b> <b>LOCTITE 19GM BLUE THREADLOCKER STICK</b>  	<b>37686</b> <b>LOCTITE 19GM RED THREADLOCKER STICK</b>  	<b>51604</b> <b>LOCTITE TIGHT ANAEROBIC GEL 50ML</b>  	<b>21348</b> <b>LOCTITE PRIMER-N AEROSOL 4.5OZ</b>  
<b>24221</b> <b>BLUE REMOVEABLE THREADLOCKER 10ml</b>  	<b>26221</b> <b>262 RED HIGH STRENGTH THREADLOCKER 10ml</b>  	<b>29021</b> <b>290 GREEN MEDIUM THREADLOCKER 10ml</b>  	<b>32526</b> <b>2760 RED HIGH THREADLOCKER 10ml</b>  



ADHESIVES



### Thread Sealing

#### 545 Hydraulic/Pneumatic Thread Sealant

IBS No. 54531 — 50 ml IBS No. 32429 — 10 ml

Designed for both hydraulic and pneumatic systems, 545 contains no fillers or particles which could contaminate system fluids, foul valves, or clog fine filters and screens. Suitable for fittings up to 2" ( 50 mm) in diameter, 545 has excellent solvent resistance.

*Additional sizes available as non-stock items*



#### 561 PST Thread Sealant "Quick Stix"

IBS No. 37127 - 19 grams

New, patented semi-solid stick formula offers added convenience and portability. Like Loctite® 565™ PST® this product has immediate low pressure sealing, eases disassembly, and will not contaminate or clog lines. The semi-solid formula also means it won't spill or leak, making it great for overhead applications or carrying in a pocket or toolbox.



#### 565 PST Thread Sealant

IBS No. 56531 — 50 ml tube 56541 — 250 ml tube

Formulated specifically for metal, tapered pipe thread fittings, 565 cures rapidly to provide immediate low pressure sealing. Its controlled lubricity prevents galling and it prevents mated thread areas from rust and corrosion. 565 can be used on fittings up to 2" (50mm) in diameter.

NSF Food Grade with primer

Refer to approvals on tech page (SA-22)



### Loctite Quick-Stix Assortment

IBS No. 673R • 6 Items • 6 Pieces

Packaged in a clear plastic locking storage container for easy storage & organization

IBS, Inc. SPECIALTY PRODUCTS FOR MAINTENANCE & REPAIR INDUSTRIALBOLTY.COM © © © 800-678-1996		Loctite Quick-Stix Travel Tray			
Assortment 673R					
37087 LOCTITE 19GM BLUE THREADLOCKER STICK	37686 LOCTITE 19GM RED THREADLOCKER STICK	37127 LOCTITE 561 PST THD SEALING STICK 19GM	37229 LOCTITE COPPER ANTISIEZE 19GM STICK	39148 LOCTITE 668 MED STR RETAINING STICK 19GM	39152 LOCTITE ORANGE GASKET ELIM 18GM STICK



ADHESIVES



# IBS, INCORPORATED

## Loctite Products S08

### Thread Sealing

#### 567 PST Thread Sealant

Pipe Sealant Formulated for Stainless Steel and all Metals

**IBS No. 56747 - 50 ml tube**

A general-purpose instant thread sealant for taper/taper threads. Excellent solvent resistance and eliminates galling on stainless steel. Ideal for stainless steel, iron, aluminum, galvanized steel and other metals. Controlled strength for easy disassembly with hand tools. Service temperature up to 480°F (250°C).

- Prevents leaks; does not shrink, crack, creep or shred.
- Resists vibration and shock loads.
- Seals to burst strength of most piping systems.
- Prevents galling and corrosion; eliminates seized assemblies.



*Additional sizes available  
as non-stock items*

#### No More Leaks™

Plastic Pipe Sealant

**IBS No. 1537780 — 16. oz. brush can**

Seals plastic pipes and allows easy disassembly. Specially formulated without the added lubricity of PTFE to avoid cracked fittings caused by overtightened joints.



*Additional  
sizes available  
as non-stock  
items*

#### Thread Sealant with PTFE

**IBS No. 1527514 — 16 oz. brush can - Non Hardening**

A general purpose sealant with the added lubricity of PTFE for metal pipes. Won't shred like PTFE tape and allows easy disassembly. Resists common shop fluids.



*Additional  
sizes available  
as non-stock  
items*

#### Tight Anaerobic Gel

**IBS No. 51604 — 50 ml tube**

Tight® is a multi-purpose anaerobic gel that seals, locks and retains. It seals against most liquids and gases and works well on coarse threads, large gaps, and all overhead applications. Use on nuts, bolts, studs, screws, threads.



*Additional sizes  
available  
as non-stock items*

A  
D  
H  
E  
S  
I  
V  
E  
S



# IBS, INCORPORATED

## Sealants & Adhesives S02



### DriveGrip Anti Cam-Out Fluid

IBS No. 52010 0.5 FL oz. Tube

Drive Grip makes removing and tightening screws and other fasteners a breeze. A single drop creates a positive grip between the metal surfaces of the fastener head and drive tool. Works great in applications where fastener heads or drives are worn or damaged.

Drive Grip increases the grip strength between the fastener head and tool by as much as **700%** and virtually eliminates tool wear, rounding and deforming of fasteners

#### APPLICATIONS:

- Aids in the removal of rusted or “frozen-in-place” screws and bolts that won’t budge.
- Use Drive Grip in conjunction with all types of screwdrivers, hex keys, pliers, channel locks, vise grips, sockets, as well as open-end and box-end wrenches

#### BENEFITS:


- **Economical:** Spares the time and expense involved with drilling out screws, using “easy outs” or possibly having to re-tap holes.
- **Simplifies Operation:** Works with standard screwdrivers, reducing the need for specially designed screwdrivers, reamers, or drilling out damaged screws.
- **Averts injury:** Helps reduce fatigue and extreme effort that leads to injury.
- **Protects Surrounding Surfaces:** Prevents driver slippage.



**Works with all types of screws:**  
Phillips™, Slotted, Hex, Square, Torx®



No need to drill out or use pliers on stubborn screws.




Prevents screwdriver from slipping and causing damage.

ADHESIVES

### DriveGrip & Insert Bits (Z02)

IBS No. 787R 10 Items • 19 Pcs


Packaged in a locking plastic box for easy storage & organization

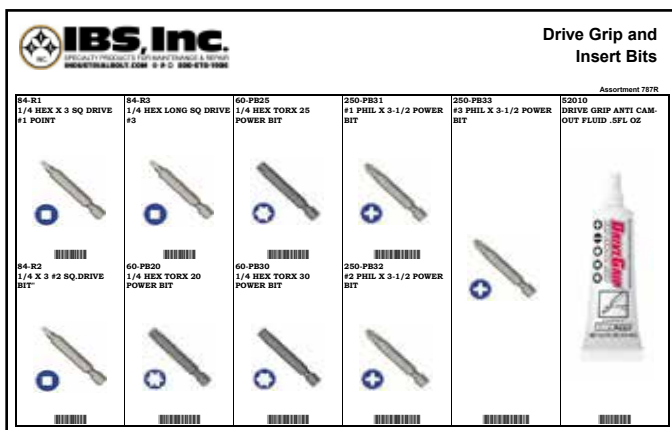

### DriveGrip & Nutserts (Z02)

IBS No. 788R 6 Items • 9 Pcs

Packaged in a locking plastic box for easy storage & organization

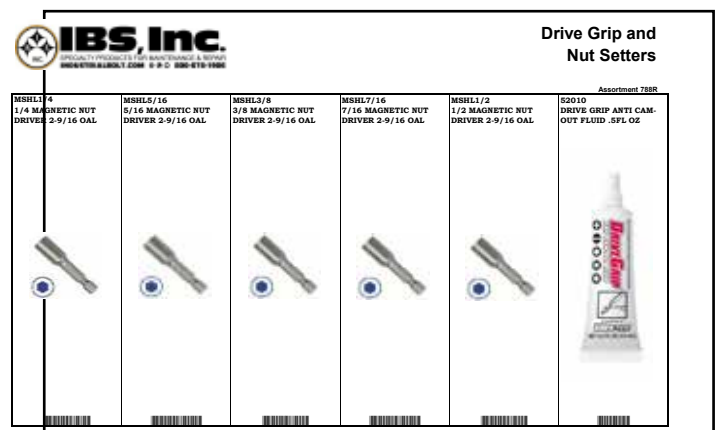



# IBS, INCORPORATED

## Sealants & Adhesives S02

### Thread Sealing

## Anti-Seize Lubricant & Sealant

IBS No. AS022 — 16 oz. can

IBS No. EQ001 (Brush Top Dispenser)



A special blend of extra fine graphite and aluminum particles in synthetic oils. It's unique qualities prevent corrosion, seizure, and galling where two metals (including stainless steels) must come together to provide a tight make up. **It is effective to 2200°F** and also functions as a high temperature lubricant and sealant as well (we even package it in grease cartridges).

AS022 is absolutely non-melting, will not drip or run, and is superior to copper or lead based lubricants because it eliminates electrolysis, withstands higher temperatures and pressures and gives cleaner breakouts from high torques.

**Unique brush pump dispenser for 16oz cans** allows use of all the product in the can, cleaner application of the product (no messy hands), and keeps product from becoming contaminated.



#### Technical Data:

Temperature Range.....-20° to 2200°F  
Flash Point.....C.O.C. 310°F  
Color.....Silver  
NLGI Grade.....No. 1  
Water Resistance.....Insoluble  
Protective equipment.....None  
Poison Classification.....Non-toxic  
Particle size.....Less than 1 micron

#### Typical Applications:

- Rollers and conveyors
- Gears, Chains, and Drives
- All Threaded Fittings
- Gaskets, Flanges, and O-rings
- Valve Stems and Cages
- Cylinder Head Assemblies
- Furnaces and Burner Assemblies
- Key ways, and Shaft Coupling Bolts
- Fuel injectors and Spark Plugs
- Low RPM Bearings

Note: Corrosive inhibitors: Conventional Imadoline Derivate,  
EP Additive: diester Type - contains no Phosphorous, sulfur, or metal salt.  
Raw materials used for manufacturing AS022 contains 0 ppm chlorides and 0 ppm heavy metals.  
AS022 in grease cartridge fortified with molybdenum disulfide.

A  
D  
H  
E  
S  
I  
V  
E  
S



## Adhesives

### Blu-Goo

## Super Sealant & Lubricant Fortified with Metalon™

**IBS No. ML013-16 - 16 oz. Can with Brush Top**

**ACCESSORIES: EQ001 Pump Brush Dispenser for 16 oz can**



**Blu-Goo™** is a special blend of inert materials that offer a variety of industrial uses where reduction of metal to metal contact is desired. As a thread sealing compound, **Blu-Goo™** forms an interface between male and female threads that provides anti-galling/seizing protection of the joint, which can withstand pressures up to 20,000 psi, even in worn, corroded or badly machined thread surfaces.

**Blu-Goo™** is also an excellent gear box additive. It forms a film over the internal parts, resulting in a noticeable reduction in play, gear noise, and leakage. It also reduces torque stress, allowing a reduction in drive power requirements. When applied to gasketed surfaces or used as a packing supplement, it prevents fluid leakage from around the seal.

Good for any application up to 600°F, **Blu-Goo™** will work on Stainless Steel, Aluminum, Iron, Brass, Fiberglass and Plastic. Not affected by acids, caustics or common solvents.

#### Typical Applications:

- Thread Sealant
- Gearbox Additive
- Gasket Dressing
- Packing Supplement
- Pump Lubricant
- Low Temperature Anti-Seize
- O-Ring Lubricant

#### APPLICATION INSTRUCTIONS:

**Thread Sealing:** Apply Blu-Goo to both male and female threads. Spread evenly with brush or other applicator. As connection is being made-up, Blu-Goo will "plate out" evenly over threads.

**As Gearbox Additive:** Mix Blu-Goo to gear oil in the following amounts: 1 quart, 1 oz. of Blu-Goo; 2 quarts, 2 oz.; 4 quarts, 3 oz.; 8 quarts, 5 oz.; 12 quarts, 6 oz.; 16 quarts, 7 oz.

**As a Gasket Dressing:** Coat one side of metal flange face. Press gasket into Blu-Goo on surface. Then coat exposed face of gasket. To help prevent leakage, also coat the inside edge of the gasket before making up flange.

**As Packing Supplement:** Coat each ring of packing. Put in place, seating each ring individually. Replace follower gland and hand tighten lightly. For other applications, apply similarly as products previously used.



# IBS, INCORPORATED

## Sealants & Adhesives S02

### Adhesives

A  
D  
H  
E  
S  
I  
V  
E  
S

#### Multi-Purpose Adhesive

**IBS No. 74510 — 3.70 oz. tube IBS No. 74511 — 10.2 oz. cartridge**

**MULTI-PURPOSE ADHESIVE** is a highly versatile compound that exhibits exceptional adhesive and sealant characteristics. It will adhere to a larger variety of surfaces than most other adhesives with greater strength. It adheres to highly porous materials such as cinder blocks, or to non-porous surfaces such as glass, metal, or rubber.

**MULTI-PURPOSE ADHESIVE** is exceptionally flexible, highly abrasion resistant, non-corrosive, paintable, self-leveling, and maintains its properties under water. It has an elongation of 900% and a 400 volt per mil dielectric strength, so it is ideal for repairing cable and sealing electrical connections.

Note: Other size containers and colors available with special quote.



#### Technical Data

Color.....	Clear
Service Temperature Range.....	-40°F to 150°F
Hardness.....	80 Shore A
Tensile Strength.....	3500 lb/in2 (ASTM D-412)
Elongation.....	900%
Paint Over Time.....	24 Hours
Cure Times.....	Tack Time: 10 minutes
	Full Cure: 24 hours (Thin Film)
	Full cure: 48-72 hours (Thick Film)

### Metalink Adhesives

#### Debonder™

**IBS No. ML525 — 2 oz bottle**

**DEBONDER™** -The "Super-Glue Remover". Removes cured cyanoacrylate as well as most other adhesives, paint, oils, mold release, printer ink, and permanent markers. Great for softening thread locking compounds, removing signs, etc.



#### Accelerator™

**IBS No. ML530 — 2 oz bottle**

**ACCELERATOR™** promotes instant cure of all cyanoacrylate adhesives. It increases gap fill and allows fillet forming. Great for tacking wires to circuit boards and hanging signs. It even enhances bond strength in some applications. Convenient pump spray delivery. Contains no CFC's.






### Brushable Ceramic

**IBS No. ML406 - 8# Kit (Includes 8 - 1# Containers, 4 Red, 4 Blue)**  
**IBS No. ML406-2 - 2# Kit (Includes 2 - 1# Containers, 1 Red, 1 Blue)**

ML406 Brushable Ceramic is a two component, brushable, 100% solids(solvent free) high technology polymer formula, combined with diamond-hard ceramic fillers that provide an exceptionally tough surface for wear and corrosion areas. It offers a high gloss surface to eliminate sticking and turbulence. In addition to withstanding fine particle abrasive attack, it also protects against moderate corrosion, and withstands temperatures up to 400°F / 95°C. Each ML406 kit contains two colors, (red and blue), so that by alternating layers, you can more easily gauge wear.

#### TYPICAL APPLICATIONS:

- Tube Sheets
- Water Boxes
- Pump Housings
- Impellers
- Tank Linings
- Cyclones
- Cort Nozzles
- Chutes, Pipes, & Elbows
- Hydroturbine Housings
- Discharge Nozzles
- Mixing Blades

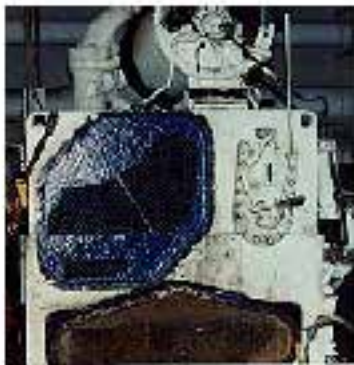

Tube Sheet Repair



Pump Repair

#### TECHNICAL DATA:

Compressive Strength (ASTM-D-695-54).....	21,000 psi
Tensile Strength (ASTM - D-638).....	4,800 psi
Operating Temperature (constant).....	250°F
Intermittent Temperature Fluctuations.....	up to 400°F
Dielectric Strength.....	500 volts/1 mil thickness (25 microns)
Hardness (Shore D).....	96 D
Working Time (Pot Life) @ 77°F.....	30 minutes
Cure Time @ 77°F.....	6 hours
Coverage.....	3 sq. ft. per pound @ 30 mils thick
Mix Ratio-By Volume.....	6 parts B to 1 Part A
By Weight.....	14 parts B to 1 Part A

#### APPLICATION INSTRUCTIONS:

1. Grind, sand, brush or grit-blast surface for best adhesion. Clean with (74156) MM Safety Solvent IV Degreaser and wipe dry. In humid climates it is advisable to flame brush the surface to prevent flash rusting and to help the polymer to "wet out". Apply MM Silicone Spray (74108) as a release agent to any area you do not want the compound to adhere to.
2. Mix all Resin and all of Hardener thoroughly until uniform in color (no streaks). Apply fully mixed material to desired surface with the enclosed brush.
3. Working time is 25 minutes at room temperature. Material is hard in 6 hours and fully cures in 12 hours. The curing time may be shortened considerably by heating the surface to 150 degrees F. Second coats may be applied as soon as the first coat is firm (usually about 45 minutes).

A  
D  
H  
E  
S  
I  
V  
E  
S



# IBS, INCORPORATED

## Sealants & Adhesives S02

### Brushable Ceramic


#### CHEMICAL RESISTANCE AT AMBIENT TEMPERATURE

Tap Water.....	E
Sea Water.....	E
15% Hydrochloric Acid.....	E
20% Sulfuric Acid.....	E
10% Ammonia.....	E
30% Caustic Soda.....	E
Gasoline.....	E
Xylene.....	E
Toluene.....	G
Benzene.....	P
MEK.....	G
50% Ethanol.....	G
Methylene Chloride.....	P

E- Recommended for continuous immersion  
 G- Recommended for intermittent contact  
 P- Not recommended

#### WARNING:

This product is a potential skin sensitizer. May cause injury to eyes and skin following prolonged or repeated contact. Inhalation of vapor may cause respiratory tract irritation. Use adequate ventilation when applying to avoid inhalation of vapor. Prevent contact with eyes and skin. Read and understand M.S.D.S. sheet.

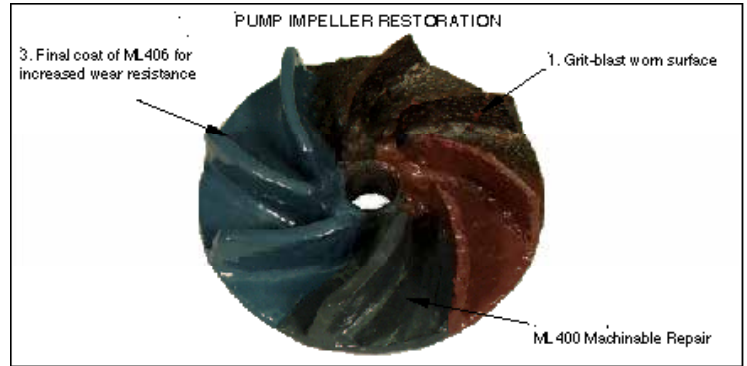

#### BRUSHABLE CERAMIC APPLICATIONS



ML406 BRUSHABLE CERAMIC - Centrifugal Pump Coating - Temple Inland, Buna, TX



ML406 BRUSHABLE CERAMIC - River Discharge Pump - Inland Container, Orange, TX



#### BRUSHABLE CERAMIC APPLICATIONS & TESTIMONIALS



October 20, 1995

Mr. Rodney Robinson  
 P.O. Box 491  
 Henry, Texas 77842

Dear Mr. Robinson,

We recently removed several secondary coolers from our 20,000-gallon unit that had been coated with your Metabond products these years ago. The coolers were used in fresh water service.

Heavy corrosion was present on uncoated areas. The parts of the coolers that were coated with Metabond performed extremely well with minimal evidence of corrosion. We are in the process of re-coating parts of the old equipment that were unprotected.

We expect similar outstanding results in the future. Thanks for your help in keeping our maintenance costs down.

Sincerely,  
  
 Roger A. Baker  
 DuPont Eng. Services

September 12, 1996

To Whom It May Concern:

I have been a user of Metabond Polymer and Adhesive products for over seven years. As a Contractor assigned to the DuPont Ciba-Geigy Sabine Works plant, I have applied a variety of Metabond epoxy compounds in various and operational applications. In all applications I have found the products to perform exceptionally well, and exactly what they are purported to be. They have performed so well that Metabond Products have become the epoxy contractor of choice by DuPont engineers. I also have found the staff of Applied Maintenance Specialties, Inc. to be very knowledgeable in application particulars and problem solving.

Sincerely,  
  
 Walter A. Clark  
 Service Environmental Company  
 Beaumont, TX  
 409-886-9654

City of Tacoma  
 Public Works Department  
 2301 The Strand Ave.  
 Tacoma, WA 98402-7111  
 (360) 525-2338

October 18, 1996

City of Tacoma  
 Public Works Department  
 Senior Utility Director  
 2301 The Strand Ave.  
 Tacoma, WA 98402-7111  
 (360) 525-2338

The City of Tacoma utilizes the storm drainage sewer from the local geographical area for the effluent of the major water treatment facility. This system includes a large number of old clay drainage pipe structures and manholes over 100 years old, resulting in frequent pipe failures.

We have used a product as protect these critical components supplied by Ibsco. This product allows a ceramic coating on the base material which allows the ceramic material to wear rather than the base material itself.

IBS has introduced a ceramic coating to us in June 1996 which helped to provide the same protection. This product, called economic ceramic repair was tested against the previous product. The test consisted of a simulation of 120 psi water used on a very concentrated area on both the Ibsco and Metabond products. We found the Ibsco product failed after one month. The Metabond product was still intact after three months.

Thanks to the test results dramatically favored the Metabond ceramic product, our proof of performance is in the installed structures. The IBS Metabond Ceramic Repair was applied to many drainage pipe structures which have then remained in their original condition.

In the past, the Ibsco product would have required an application of the Ibsco product every two to ten years. The Metabond product was checked after one year. No wear whatsoever was discovered.

The Metabond product has been receiving our critical components for over four months with the initial coating. In our opinion, this product represents a significant factor and significant savings to the city of Tacoma.

Dick Skene  
 WWTP Maintenance Supervisor



October 18, 1996

City of Tacoma  
 Public Works Department  
 Senior Utility Director  
 2301 The Strand Ave.  
 Tacoma, WA 98402-7111  
 (360) 525-2338

The City of Tacoma utilizes the storm drainage sewer from the local geographical area for the effluent of the major water treatment facility. This system includes a large number of old clay drainage pipe structures and manholes over 100 years old, resulting in frequent pipe failures.

We have used a product as protect these critical components supplied by Ibsco. This product allows a ceramic coating on the base material which allows the ceramic material to wear rather than the base material itself.

IBS has introduced a ceramic coating to us in June 1996 which helped to provide the same protection. This product, called economic ceramic repair was tested against the previous product. The test consisted of a simulation of 120 psi water used on a very concentrated area on both the Ibsco and Metabond products. We found the Ibsco product failed after one month. The Metabond product was still intact after three months.

Thanks to the test results dramatically favored the Metabond ceramic product, our proof of performance is in the installed structures. The IBS Metabond Ceramic Repair was applied to many drainage pipe structures which have then remained in their original condition.

In the past, the Ibsco product would have required an application of the Ibsco product every two to ten years. The Metabond product was checked after one year. No wear whatsoever was discovered.

The Metabond product has been receiving our critical components for over four months with the initial coating. In our opinion, this product represents a significant factor and significant savings to the city of Tacoma.

Dick Skene  
 WWTP Maintenance Supervisor

A  
D  
H  
E  
S  
I  
V  
E  
S




### BRUSHABLE CERAMIC APPLICATIONS

#### Cooling Tower Distribution Pipe Repair



Repair and Coating of Main Cooling Tower Water Distribution Pipe (36" x 92ft Long) at Bayer Rubber Plant, Orange, TX

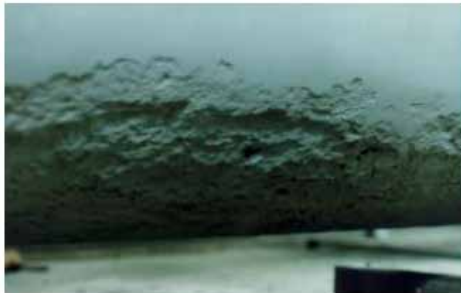

Upon inspection of the pipe during a scheduled plant turn-around, it was discovered that continuous leaks had caused massive erosion on the bottom of the pipe. Replacement of pipe was not an option due to fire restrictions and time constraints.



Pipe was repaired in place with approximately \$66,000 of Machinable Repair and Paint On Ceramic Coating. Estimated saving for replacement of pipe: \$325,000.

### BRUSHABLE CERAMIC APPLICATIONS

#### HEAT EXCHANGER TUBE SHEET REPAIR



Step 1. Freshly sand blasted tube sheet holes are filled with cork and all gasket surfaces are taped up.



Step 2. Surface dust is cleaned off with Maintenance Magic Safety Solvent IV Degreaser and ML406 Brushable Ceramic is applied.



Step 3. Cork and tape removed. ML406 provides a corrosion and cavitation resistant surface that will provide many more years of service.

Tube sheet repair performed for Carrier Corporation.

### BRUSHABLE CERAMIC APPLICATIONS

#### FLAT BACK ELBOWS ON CHIP BLOW LINES



FLAT BACK ELBOWS receive a great degree of wear as they divert the flow of chips or wood particles in a blow line. ML406 Brushable Ceramic Coating is used for increased wear resistance and also to decrease friction that leads to clogging.



For best protection, two coats of ML406 are applied to the interior of the elbow (one end and one blue). When the unit is disassembled for inspection it is easy to determine wear patterns in the coating.



The "Flat Back" portion of the elbow is coated thicker than the rest, as it receives the majority of the wear. ML406 Brushable Ceramic may also be used to coat the inside of the Chipper Housing and any Chip Fan Housings and Impellers.

Flat Back Elbow Repair at Inland Paperboard, Orange TX



# IBS, INCORPORATED

## Sealants & Adhesives S02

### Dillo Hyde™ Wear Systems Ceramic Hexagonal Wear Plate

**IBS Numbers:**

- ML200-125** 1/8" x 6" x 6" (48 sheets per box)
- ML200-125H** 1/8" 1/2"-Tile for edge finishing
- ML200-250** 1/4" x 6" x 6" (36 sheets per box)
- ML200-250H** 1/4" 1/2"- Tile for edge finishing
- ML200-125KT** Dillo Hyde Kit with 12ea 1/8" x 6" x 6" tiles & 1 lb M406  
Brushable Ceramic
- ML200-250KT** Dillo Hyde Kit with 12ea 1/4" x 6" x 6" tiles & 1 lb M406  
Brushable Ceramic

**NOTE: ORDERED AS NON-STOCK ITEMS**

"Dillo Hyde" ceramic hexagonal wear plates represent the absolute ultimate in wear technology today. Each .80 inch tile is made of Sapphire-hard 87% Alumina Ceramic and is pre-mounted on 6" square mats to facilitate application. At a "9+" on the Mohs Hardness Scale, "Dillo Hyde™" is second only to a diamond in hardness and provides the ultimate abrasion resistant coating for a variety of material handling environments. When combined with our ML406 Brushable Ceramic Coating as an adhesive, the two form a tough, wear-resistant coating that will outlast epoxies, hard-plating, metalizing powders, or hard-surfacing electrode deposits many times over.



'DILLO HYDE™ used to repair contoured discharge area of exhaust fan housing.

**Characteristics:**

**Easy Application:**

The flexible 6" square mats will bend to fit a variety of curved sections such as pipe, pump casings, elbows, etc. Installation methods include epoxy, refractory cement, and tile adhesive.

**Temperature resistant:**

Maintains wear-resistant qualities at elevated temperatures (-50° to +2000°F).

**Corrosion Resistant:**

Resistant to attack by hydrocarbons, most alkalies or mineral acids (except hydrofluoric).

**Inert:**

Alumina Ceramic is non-toxic, non-allergenic, non-contaminating, and non-hazardous to persons or the environment. It will not rust, oxidize, discolor, or decompose.

**Super Hard:**

9+ on the Mohs Hardness Scale; second only to diamonds in hardness among natural materials.

**DILLO HYDE™ WEAR SYSTEMS  
Hardness Comparison (MOHS)**

Diamond	10
Sapphire	9
Dillo Hyde	9
Topaz	8
Quartz	7
Tool Steel	6.5
Glass	5.5
Carbon Steel	5.5
Limestone	4

A  
D  
H  
E  
S  
I  
V  
E  
S





### Pipe Repair

#### Seal-Skin™

**IBS No. ML450, 2 " X 5' roll**

**IBS No. ML450-4, 4" x 15' roll**

Resin-coated, fiberglass cloth designed for rapid repair of ruptured piping and other patch jobs. It is moisture activated (reacting with or without water immersion), making it excellent for water or steam line repairs. Sets up in approximately 30 minutes. It works on PVC, metal, rubber, fiberglass, plastic and other type materials. Has high adhesive qualities. Odorless, non-combustible. Can be sanded or painted.

#### TECHNICAL DATA:

Compressive Strength.....	26,600 psi
Tensile Strength.....	24,900 psi
Flexural Strength.....	16,100 psi
Bond Strength.....	98 psi
Barcol Hardness.....	53
Heat Resistance.....	1,100°F
Dielectric Strength.....	16,060 Volts
Cure Time @ 75°F.....	30 minutes



A  
D  
H  
E  
S  
I  
V  
E  
S



# IBS, INCORPORATED Aerosols & Chemicals S04

## Epoxy Repair Products

### EZ-Poxy Aqua

**PERMANENTLY REPAIRS WET AREAS  
AND UNDERWATER SURFACES**  
IBS No. 74505

EZ-Poxy Aqua bonds tenaciously to fiberglass, metal, wood, concrete, ceramic, glass and other surfaces in either fresh or salt water.



Easy To Use!

- 1) Cut or break off equal portions of light and dark material.
- 2) Roll and knead putty in hands until streaks disappear and color is uniform.
- 3) Apply at once to surface, remove excess before hardening starts.

#### Features:

- Easy to Use
- Cures under water in just 60 minutes.
- Contains fading blue dye that turns pure white after mixing.

#### PERFORMANCE DATA\*:

Working Life (minutes)	20 - 30
Shelf Stability (months @ 75°F, min.)	24
Hardness, Shore D (full cure, 24 hrs.)	65 - 75
Lap Shear Tensile Strength	
On Steel (1" x 1" x 1/16") lbs	800-1000
On Fiberglass (1" x 1" x 1/16") lbs	500
Compressive Strength (psi)	10-14,000
Density (gm/cm <sup>3</sup> , lb/gal)	1.9, 15.8
Shrinkage (%)	<1
Non-Volatile Content (%)	100
Electrical Resistance (megohms)	30,000
Dielectric Strength (volts/mil)	300
Upper Temperature Limit	
Continuous (°F)	250 (121°C)
Intermittent (°F)	300 (149°C)

#### CHEMICAL RESISTANCE:

Resistance to hydrocarbons, ketones, alcohols, esters, halocarbons, aqueous salt solutions and dilute acids and bases.

\* Typical properties; for information only; not for specification purposes.


**READ MSDS SHEET BEFORE USING**

#### APPLICABLE STANDARDS

**USDA** Meets the USDA requirements for use in federally inspected meat and poultry plants.  
**ABS** Certified by the American Bureau of Shipping for use on marine vessels.



**1. Cut**



**2. Mix**



**3. Apply**

#### USE ON . . .

- Scratches
- Patching cuts & holes
- Fiberglass
- Metal
- Wood
- Pipes
- Fittings
- Electrical connections
- Leaking gaskets
- Fuel Tanks
- Water Tanks
- Tubs
- Sinks
- Pools
- Battery cables



### Epoxy Repair Products E-Z Poxy Steel

**FOR STEEL HARD REPAIRS IN A STICK**

**IBS No. 74502**

**E-Z Poxy Steel** combines steel reinforced epoxy resin and hardener side by side in a 6" x 3/4" stick, conveniently packed in an easy to carry plastic tube. After just one hour, **E-Z Poxy Steel** can be drilled, tapped, sanded, machined or painted.



Easy To Use!

- 1) Cut or break off equal portions of light and dark material.
- 2) Roll and knead putty in hands until streaks disappear and color is uniform.
- 3) Apply at once to surface, remove excess before hardening starts.

#### PERFORMANCE DATA:

Working Life (minutes)	3 - 5
Shelf Stability (months @ 75°F, min.)	24
Hardness, Shore D (full cure, 24 hrs.)	75 - 8

Lap Shear Tensile Strength	
On steel (1" x 1" x 1/16") lbs	800 - 1,000
Compressive Strength (psi)	10 - 14,000
Shrinkage (%)	<1
Non-Volatile Content (%)	100
Electrical Resistance (megohms)	30,000
Dielectric Strength	300
Upper Temperature Limit	
Continuous (°F)	250°F (121°C)
Intermittent (°F)	300°F (149°C)

#### CHEMICAL RESISTANCE:

Resistance to hydrocarbons, ketones, alcohols, esters, halocarbons, aqueous salt solutions and dilute acids and bases.

**Not to be used for specification purposes.**

*\* Typical properties; for information only; not for specification purposes.*


**READ MSDS SHEET BEFORE USING**

#### APPLICABLE STANDARDS

- USDA** Meets the USDA requirements for use in federally inspected meat and poultry plants.
- ABS** Certified by the American Bureau of Shipping for use on marine vessels.
- NSF** Certified by the National Sanitation Foundation for use in contact with drinking water.



**1. Cut**



**2. Mix**



**3. Apply**

#### FEATURES

- Mixes like putty.
- Hardens like steel.
- Even cures underwater.

#### USE ON . . .

- Tanks
- Radiators
- Bathroom Fixtures
- Tile
- Cars
- Boats
- Furniture
- Metal & Wood
- Down spouts
- Gutters
- Garbage Cans
- Valves, Etc.



# IBS, INCORPORATED

## Aerosols & Chemicals S04

### Epoxy Repair Products

#### EZ-Poxy Wood

#### WOOD REPAIR EPOXY PUTTY STICK

IBS No. 74506



**EZ-Poxy Wood Epoxy Putty Stick** is a fast-setting polymer compound that enables permanent repairs to wood. It also bonds to metals, glass, masonry, and many plastics. Each handy stick contains pre-measured portions of activator and base throughout — no measuring or mixing tools are necessary. As the epoxy is mixed, the two contrasting colors blend into one color to indicate complete mixing. The consistency (like modeling clay) eliminates drips and runs, facilitates adhesion to the substrate, and allows the material to be shaped, formed and sculpted as needed before the curing begins. Cured EZ-Poxy Wood has a hardness and density similar to that of wood. Once cured, it can be tapped, drilled, sawed, filed, carved sanded, painted or stained.\* Suitable for interior or exterior use, it is resistant to water, chemicals, and temperature extremes. Contains no solvents or VOC's. It's non-flammable and releases no noxious fumes. It won't shrink, rot or pull away. The unmixed portion stays fresh for future use when saved in the original package.

*\* Staining: EZ-Poxy Wood may accept stain differently from the surrounding wood. Some types of oil-based stains may be added during the mixing step.*

#### PERFORMANCE DATA\*:

Working Life (minutes)	15 - 25
Shelf Stability (months @ 75°F, min.)	24
Hardness, Shore D (full cure, 24 hrs.)	70 - 80
Lap Shear Tensile Strength	
On Steel (1" x 1" x 1/16") lbs	800-1000
On Oak (1" x 1" x 1/16") lbs	500
Compressive Strength (psi)	10-14,000
Density (gm/cm <sup>3</sup> , lb/gal)	9, 7.5
Shrinkage (%)	<1
Non-Volatile Content (%)	100
Electrical Resistance (megohms)	30,000
Dielectric Strength (volts/mil)	300
Upper Temperature Limit	
Continuous (°F)	250 (121°C)
Intermittent (°F)	300 (149°C)

#### CHEMICAL RESISTANCE:

Resistance to hydrocarbons, ketones, alcohols, esters, halocarbons, aqueous salt solutions and dilute acids and bases.

*\* Typical properties; for information only; not for specification purposes.*

**READ MSDS SHEET BEFORE USING**

#### REBUILD...

- stripped screw holes
- scratches
- gouges & cracks
- dry rot
- knot holes
- carpenter bee damage

#### RESHAPE...


- handles and knobs
- level chair legs
- carvings

#### RESTORE...

- furniture
- molding and trim
- picture frames
- antiques



#### 1. Cut



#### 2. Mix



#### 3. Apply

#### APPLICABLE STANDARDS

**USDA** Meets the USDA requirements for use in federally inspected meat and poultry plants.

**ABS** Certified by the American Bureau of Shipping for use on marine vessels.

ADHESIVES



### Epoxy Repair Products

### EZ-Poxy Aluminum

#### ALUMINUM REINFORCED EPOXY PUTTY STICK

IBS No. 74508



**EZ-Poxy Aluminum Epoxy Putty Stick** is a fast-setting polymer compound that enables permanent repairs to anything made of aluminum. It also bonds to metals, glass, masonry, and many plastics. Each handy stick contains pre-measured portions of activator and base throughout — no measuring or mixing tools are necessary. As the epoxy is mixed, the two contrasting colors blend into one color to indicate complete mixing. The consistency (like modeling clay) eliminates drips and runs, facilitates adhesion to the substrate, and allows the material to be shaped, formed and sculpted as needed before the curing begins. Cured EZ-Poxy Aluminum cures to a light gray metallic color. Once cured, it can be tapped, drilled, screwed, sawed, filed or painted. Suitable for interior or exterior use, it is resistant to water, chemicals, and temperature extremes. Contains no solvents or VOC's. It's non-flammable and releases no noxious fumes. It won't shrink or pull away. The unmixed portion stays fresh for future use when saved in the original package.




#### REPAIR...

- gutters
- storm doors
- windows
- aluminum siding
- boats
- RV's



#### 1. Cut



#### 2. Mix



#### 3. Apply

#### MEND...

- machine parts
- air conditioners
- wheels
- tanks
- pipes
- castings
- radiators

#### FILL...

- cracks
- holes

#### Performance Data\*

Shelf Life (months @ 75°F, min) .....	24
Hardness, Shore D (full cure, 1 hr).....	80
Lap Shear Tensile Strength (psi)	
On Aluminum .....	500
On Steel .....	.600
Compressive Strength (psi) .....	12,000
Density (gm/cm <sup>2</sup> , lb/gal) .....	1.6, 13.4
Shrinkage (%).....	<1
Non-Volatile Content (%).....	100
Electrical Resistance (megohms) .....	30,000
Dielectric Strength (volts/mil) .....	300
Upper Temperature Limit	
Continuous (°F) .....	250
Intermittent (°F) .....	300

#### Chemical Resistance

Resistant to hydrocarbons, ketones, esters, halocarbons, aqueous salt solutions and dilute acids and bases.

*\* Typical properties; for information only; not for specification purposes.*

**APPLICABLE STANDARDS**  
**USDA Meets the USDA requirements for use in federally inspected meat & poultry plants**

ADHESIVES



# IBS, INCORPORATED

## Aerosols & Chemicals S04

### Epoxy Repair Products

#### EZ-Poxy Plastic

#### PLASTIC REPAIR EPOXY PUTTY STICK

IBS No. 74507



**EZ-Poxy Plastic Epoxy Putty Stick** is a fast-setting polymer compound that enables permanent repairs to all major plastic types except polyolefins ( polyethylene / polypropylene). It also bonds to metal, wood, glass, and masonry. Each handy stick contains pre-measured portions of activator and base throughout — no measuring or mixing tools are necessary. As the epoxy is mixed, the two contrasting colors blend into one color to indicate complete mixing. EZ-Poxy Plastic contains a fading blue dye and becomes white after mixing. The consistency (like modeling clay) eliminates drips and runs, facilitates adhesion to the substrate, and allows the material to be shaped, formed and sculpted as needed before the curing begins. Once cured, it can be drilled, screwed, carved, sawed or painted. Suitable for interior or exterior use, it is resistant to water, chemicals, and temperature extremes. Contains no solvents or VOC's. It's non-flammable and releases no noxious fumes. It won't shrink or pull away. The unmixed portion stays fresh for future use when saved in the original package.

A  
D  
H  
E  
S  
I  
V  
E  
S

#### Performance Data\*

Shelf Life (months @ 75°F, min)	.....24
Hardness, Shore D (full cure, 24 hrs)	.....65
Lap Shear Tensile Strength (psi)	
On PVC	.....350
Compressive Strength (psi)	.....10,000
Density (gm/cm <sup>2</sup> , lb/gal)	.....1.6, 13.4
Shrinkage (%)	.....<1
Non-Volatile Content (%)	.....100
Electrical Resistance (megohms)	.....30,000
Dielectric Strength (volts/mil)	.....300
Upper Temperature Limit	
Continuous (°F)	.....250
Intermittent (°F)	.....300

#### Chemical Resistance

Resistant to hydrocarbons, ketones, esters, halocarbons, aqueous salt solutions and dilute acids and bases.

*\* Typical properties; for information only; not for specification purposes.*

#### REBUILD...

- rigid plastics
- semi-flexible plastics

#### REPAIR...


- automotive trim
- appliance parts
- PVC furniture
- vinyl siding
- plastic downspouts & gutters

#### SEAL...

- leaks in PVC and ABS plastic plumbing pipes



1. Cut



2. Mix



3. Apply

#### APPLICABLE STANDARDS

**USDA** Meets the USDA requirements for use in federally inspected meat and poultry plants.

**NSF** Certified by the National Sanitation Foundation for use in contact with drinking water.



### Epoxy Repair Products

## EZ-Poxy Concrete

### CONCRETE REPAIR EPOXY PUTTY STICK

IBS No. 74509



ADHESIVES

EZ-Poxy Concrete Repair Epoxy Putty Stick is a hand-mixable, fast-setting epoxy putty that quickly repairs concrete and masonry. It also bonds to metals, wood, glass, and many plastics. After mixing, it forms a concrete repair polymer that cures to a concrete-like color and texture. Each handy stick contains a pre-measured portions of activator and base throughout — no measuring or mixing tools are necessary. The consistency (like modeling clay) eliminates drips and runs, facilitates adhesion to the substrate, and allows the material to be shaped and formed as needed before curing begins. Once functional cure is reached (within minutes after application) it can be drilled, sawed, tapped, filed, sanded and painted. Suitable for interior or exterior use, it is resistant to water, chemicals, and temperature extremes. EZ-Poxy Concrete contains no solvents or VOC's. It's non-flammable and releases no noxious fumes. It won't shrink or pull away. The unused portion stays fresh for future use when saved in its original package.

#### Performance Data\*

Shelf Life (months @ 75°F, min)	.....24
Hardness, Shore D (full cure, 24 hrs)	.....65
Lap Shear Tensile Strength (psi)	
On PVC	.....350
Compressive Strength (psi)	.....10,000
Density (gm/cm <sup>2</sup> , lb/gal)	.....1.6, 13.4
Shrinkage (%)	.....<1
Non-Volatile Content (%)	.....100
Electrical Resistance (megohms)	.....30,000
Dielectric Strength (volts/mil)	.....300
Upper Temperature Limit	
Continuous (°F)	.....250
Intermittent (°F)	.....300
Chemical Resistance	
Resistant to hydrocarbons, ketones, esters, halocarbons, aqueous salt solutions and dilute acids and bases.	

\* Typical properties; for information only; not for specification purposes.

**PATCH...**

- floors, curbs, steps
- mortar, concrete

**REPAIR...**

- tile, statues
- lawn ornaments
- birdbaths
- cemetery headstones
- cracks and seams

**ANCHOR...**

- bolts, screws
- nails
- railings
- legs


**SEAL...**

- basement leaks
- tie rod holes

**APPLICABLE STANDARDS**  
**USDA** Meets the USDA requirements for use in federally inspected meat and poultry plants.



**1. Cut**



**2. Mix**



**3. Apply**



# IBS, INCORPORATED


## Assortments Z08

### Epoxy Repair Products

## 2-Part EZ-Poxy Sticks Assortment

IBS No. 640P • 6 Items • 12 Pieces

Packaged in a labeled, locking steel drawer for easy storage & organization

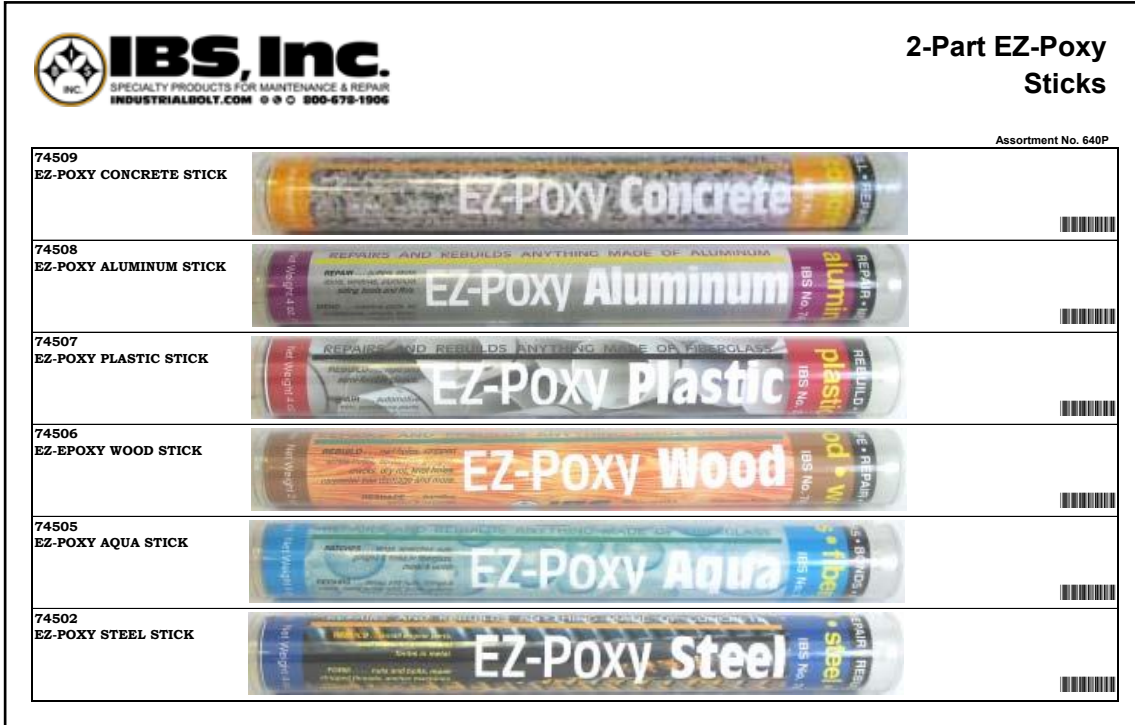

ADHESIVES

IBS No.	Name	Description	Applicable Standards	Cured Color
74509	EZ-Poxy Concrete Epoxy Stick Concrete repair epoxy putty	Repairs and rebuilds anything made of concrete	USDA	Grey
74508	EZ-Poxy Aluminum Epoxy Stick Aluminum reinforced epoxy putty	Repairs and rebuilds anything made of aluminum	USDA	Grey Metallic
74507	EZ-Poxy Plastic Epoxy Stick Plastic repair epoxy putty	Repairs & rebuilds anything made of ABS, CPVC, & PVC plastic	NSF	White
74506	EZ-Poxy Wood Epoxy Stick Wood repair epoxy putty	Repairs and rebuilds anything made of wood	USDA ABS	Light Wood
74505	EZ-Poxy Aqua Epoxy Stick Underwater repair epoxy putty	Repairs and rebuilds anything made of fiberglass	USDA ABS	White
74502	EZ-Poxy Steel Epoxy Stick Steel reinforced epoxy putty	Repairs and rebuilds anything made of steel	USDA ABS; NSF	Dark Metallic

#### APPLICABLE STANDARDS:

**USDA** - Meets the USDA requirements for use in federally inspected meat and poultry plants.

**NSF** - Certified by The National Sanitation Foundation for use in contact with drinking water.

**ABS** - Certified by The American Bureau of Shipping for use on marine vessels.



## Aerosols



### Spray Adhesive

IBS No. 74130

**Spray Adhesive** is recommended for decorative laminate to particleboard and MDF (medium density fiberboard) substrates, metals and plywood. This product has an adjustable tip offering the user a webbing type spray that is water white and does not contain Methylene Chloride. The unique formula prevents soak-in of the adhesive on porous surfaces. It offers the user very high coverage with a fast track time for general purpose bonding of a wide variety of substrates. Provides both temporary and permanent bonds.

#### Heat Resistant

for high temperature applications up to 140°F (60°C).

#### Superior Strength

handles heavy duty applications.

#### Permanent Bond

assures durability.

#### Fast Assembly

minimizes downtime.

#### Multi-Purpose

provides versatility.

#### Applications

Ideal for laminates, trim, signs, kick plates, woodworking, maintenance and asbestos removal. Adheres to most surfaces including wood, metal, glass and plastic.

**CASE QTY = 12 CANS**

- **Non Chlorinated**
- **Non-Ozone Depleting**
- **Wide Web Spray**
- **High Solids**

**FOR INDUSTRIAL / PROFESSIONAL USE ONLY**

**KEEP OUT OF REACH OF CHILDREN**

**ALWAYS READ LABEL FOR COMPLETE DIRECTIONS AND PRECAUTIONS**



# IBS, INCORPORATED

## Aerosols & Chemicals S04

### Aerosols

## R.T.V. Gasket Maker & Sealer With Spray Can Application

IBS No. 74131 - Black

IBS No. 74133 - Clear

**R.T.V. Gasket Maker & Sealer** is a single component room temperature vulcanizing silicone rubber. When applied as a formed-in-place gasket, it reacts with moisture in the air and cures to a rubber like product. RTV will adhere to clean metal, glass, most types of wood, silicone resin, vulcanized silicone rubber, ceramic, natural and synthetic fiber as well as painted and many plastic surfaces. R.T.V. Gasket Maker & Sealer has the convenience of a spray which means no more messy tubes and much less waste. With R.T.V. Gasket Maker & Sealer you can lay down a precise bead every time and claim 98% of R.T.V. from every can. Seals, bonds, and caulks. Makes any shape and size gasket on the spot.

A  
D  
H  
E  
S  
I  
V  
E  
S



**Tough Silicone Adhesive** - Adheres to and bonds natural and synthetic fibers, glass, metal, wood, other silicone rubber, hard-to-stick-to plastics, masonry products, etc.

**Numerous Maintenance Applications** - Seals against water, air, chemicals, oils and grease. Fills crevices and irregularities in joints. Waterproofs porous materials and perfect for weather-stripping. Insulates against shock and vibration and is a great electrical insulator. A perfect gasket maker for just about anything.

**Typical Uses** - Gasketing pumps, oil pans, valve covers, gear boxes and compressors.

**General Uses** - Seals windows, pipe joints, parts. Bonds gaskets, appliance parts, sign letters. Caulks joints duct work, equipment housings.

**Resists Against** - Fungus, ozone, weathering, aging, chemicals, aliphatic and aromatic compounds and shrinking.

**Typical Property Characteristics** - Tack-free in just 5 minutes and cure time at 1/8" thickness is just 24 hours. Tensile strength 350 psi. Can be used for extended periods at temps. up to 450°F and for shorter periods at 500°F.

**CASE QUANTITY - 6 CANS  
SOLD EACH**

**FOR INDUSTRIAL / PROFESSIONAL USE ONLY**

**KEEP OUT OF REACH OF CHILDREN**

**ALWAYS READ LABEL FOR COMPLETE DIRECTIONS AND PRECAUTIONS**



## Aerosols

### R.T.V. Gasket Maker & Sealer With Spray Can Application

Comparison Test Against 3 oz. and 12 oz. tubes

#### 12 oz. SqueezeTube

1. Fill Wt	12 ounce
2. Dispensed Wt	9-½ ounce
3. Total Feet Dispensed	42 feet of material (504 inches)
4. Feet Dispensed/per ounce	4.4 feet
5. Product Retention in Tube	2-¼ ounce or 21%

#### 3 oz. Squeeze Tube

1. Fill Wt	3 ounce
2. Dispensed Wt	2.4 ounce
3. Total Feet Dispensed	9 feet of material (108 inches)
4. Feet Dispensed/per ounce	5 feet
5. Product Retention in Tube	.6 ounce or 20%

#### Maintenance Magic 8 oz. Automatic Tube

1. Fill Wt	8 ounce
2. Dispensed Wt	7-½ ounce
3. Total Feet Dispensed	60 ft of ⅛ in. bead (720 in.*)
4. Feet Dispensed/per ounce	7.7 feet
5. Product Retention in Tube	½ ounce or 6%

\*This figure increases to 1056 inches when the product is used with the threaded taper nozzle attachment (IBS No. RL16065).

#### ALL MEASUREMENTS ARE BASED ON AVERAGE RESULTS

**Based on actual material in place. Maintenance Magic's pressurized can is far more economical in shop use. No more broken squeeze tubes because Maintenance Magic's can dispenser protects product and allows 98% of product to be used.**



# IBS, INCORPORATED

## Aerosols & Chemicals S04

### Aerosols

## R.T.V. Hi-Temp Red Gasket Maker & Sealer

WITH SPRAY CAN APPLICATION

IBS No. 74153

**R.T.V. Gasket Maker & Sealer** is a single component room temperature vulcanizing silicone rubber. When applied as a formed-in-place gasket, it reacts with moisture in the air and cures to a rubber like product. RTV will adhere to clean metal, glass, most types of wood, silicone resin, vulcanized silicone rubber, ceramic, natural and synthetic fiber as well as painted and many plastic surfaces. **R.T.V. Gasket Maker & Sealer** has the convenience of a spray which means no more messy tubes and much less waste. With R.T.V. Gasket Maker & Sealer you can lay down a precise bead every time and claim 98% of R.T.V. from every can. Seals, bonds, and caulks. Makes any shape and size gasket on the spot.

**Long Life Expectancy** - in excess of 10 years. Excellent Resistance To Weathering, vibration, moisture, ozone, and extreme temperatures. Can be used for extended periods at temperatures up to 600° F and for shorter periods at 650° F. Tests have shown that even after 2 months at 600° F or one week at 650° F, the sealant remains rubbery.

**Physical Properties** - Tack-free in 15 minutes, complete cure in 24 hours (1/8" thickness). Uses moisture in the air to cure.

**Tensile Strength** - 350 psi.

**Elongation** - 500%

**Applications & Uses** - Bonds glass, wood, plaster. Seals windows, doors, and seams in RV's and campers. Caulks around sinks and toilets. Seals cracks in tiles. Great for waterproofing. Seals water pipes and drain pipes. Insulates electrical connections.



**CASE QUANTITY - 6 CANS  
SOLD EACH**

**FOR INDUSTRIAL / PROFESSIONAL USE ONLY**

**KEEP OUT OF REACH OF CHILDREN**

**ALWAYS READ LABEL FOR COMPLETE DIRECTIONS AND PRECAUTIONS**

A  
D  
H  
E  
S  
I  
V  
E  
S

### Aerosols

## R.T.V. Low Volatile Blue

WITH SPRAY CAN APPLICATION

IBS No. 74631

**R.T.V. Gasket Maker & Sealer** is a single component room temperature vulcanizing silicone rubber. When applied as a formed-in-place gasket, it reacts with moisture in the air and cures to a rubber like product. RTV will adhere to clean metal, glass, most types of wood, silicone resin, vulcanized silicone rubber, ceramic, natural and synthetic fiber as well as painted and many plastic surfaces. **R.T.V. Gasket Maker & Sealer** has the convenience of a spray which means no more messy tubes and much less waste. With R.T.V. Gasket Maker & Sealer you can lay down a precise bead every time and claim 98% of R.T.V. from every can. Seals, bonds, and caulks. Makes any shape and size gasket on the spot.



**CASE QUANTITY - 6 CANS  
SOLD EACH**

#### TEMPERATURES

Silicone rubber offers both extreme low and high temperature resistance properties. It remains flexible to -60 deg C (-76 deg F) and although modulus increases, does not become brittle. These products will also withstand high temperatures up to +177 deg C (+350 deg F) during continuous operation, and up to +204 deg C (+400 deg F) for short periods. For extreme high temperatures, RED HI TEMP is recommended. This has a temperature range of +232 deg C (+450 deg F) for continuous operation, and +260 deg C (+500 deg F) for short periods

#### WEATHERABILITY

Because this material is 100% solids and contains no extenders or plasticizers, shrinkage due to weathering is negligible. Because of the chemical makeup, resistance to ultraviolet light and ozone is excellent

#### CHEMICAL RESISTANCE

This product offers good resistance to most solvents and oils, organic and inorganic chemicals; however, it is not recommended for continuous use with gasoline or fuel oil. Swelling or degradation may occur with these and certain other hydrocarbon materials. Chemical compatibility should be tested for each application considered

#### TYPICAL USES:

- Adhering auto and appliance trim, including metal, fabric and fabric-backed plastics.
- Bonding gaskets in heating and refrigeration units.
- Sealing of marine cabins and windows.
- Filleting and caulking joints in sheet metal stacks, duct work, and equipment housings.
- Formed-in-place gaskets for engines, transmissions, differentials, gear boxes, compressors, pumps and all types of equipment and machinery.
- Sealing windows in oven doors and flues on gas appliances, flanged pipe joints and access doors.
- Anywhere a tight leakproof seal is required.

**FOR INDUSTRIAL / PROFESSIONAL USE ONLY**

**KEEP OUT OF REACH OF CHILDREN**

**ALWAYS READ LABEL FOR COMPLETE DIRECTIONS AND PRECAUTIONS**



# IBS, INCORPORATED

## Aerosols & Chemicals S04

### Aerosols

## Rapid Gasket

### HEAVY BODIED BLACK RTV GASKET MAKER

IBS No. 74135

One can of Rapid Gasket can eliminate the need to stock thousands of different gaskets for the various applications out there: Newer vehicles, older vehicles, metal to metal applications, plastic to metal applications, aluminum to steel, metal to alloy, stamped to cast, etc.

The main difference between this product and standard RTV products is that it is thicker and faster, allowing the user to make leak-proof gaskets and return equipment to service immediately. Formulated to meet or exceed performance standards for long-term seal-ability, durability and handling, this material is used on OEM production lines and specified in their service parts programs. Standard RTV recommends letting it set for 2 hours before torquing down on the assembly and then allowing to cure overnight, while **Rapid Gasket** can be torqued immediately.

ADHESIVES

- **Make leak-proof gaskets in just 1 minute** allowing equipment to be returned to service immediately – no need to wait for cut gaskets to be delivered or standard RTV to set up.
- **Special applicator and tip** makes applications easier putting less hand strain and giving a better bead.
- **No cutting or measuring** eliminates the chance of error – **Rapid Gasket** is simply applied and assembled – no measuring, no cutting, and no chance of error – saves time and money.
- **Is applied directly to the surface** which creates a perfect fit for Increased reliability.
- **Adheres to both surfaces** protecting against leaks and seepage caused by vibration and thermal expansion for increased dependability.
- **Longer lasting** and more reliable because Rapid Seal is an elastomeric formed-in-place rubber gasket maker that is custom fit to any shape or size for different applications making it faster, easier and at a fraction of the cost of cut gaskets.
- **Easily applied** and therefore perfect for flanges, pans and gaskets that are repeatedly removed and replaced making disassembly easier, faster and without replacing an expensive cut gasket everytime.
- **Versatile** – Can be used anywhere paper, cork, plastic or rubber cut gaskets are used.
- One can **eliminates the need to stock thousands of different gaskets** for various applications reducing inventory and carrying costs.
- **Exceptional resistance** to oil, ATF, coolant, gear oils and other fluids (Not recommended for use in contact with gasoline or head gaskets).
- **Temperature range** -40°F to 600°F continuous, 650°F intermittent.
- **Sensor-safe.**
- **Conforms to the Specifications of:**
  - GM 998-5675 998-5990
  - FORD WSE-M4 6323-A6
  - CHRYSLER GF-44A

