



### Electrical

#### A

#### Aerosols & Chemicals

##### Cleaners

Batt. Clean/Protect Q-119

##### Electrical

4 Way Plus Q-119

Contact and Circuit

Board Cleaner Q-120

Degreaser Q-119

Dielectric Grease Q-120

Undercoat Q-120

#### Assortments, Electrical

##### Automotive Electrical

Automotive Fuse Holders & Accessories Q-102

Deutsch DT Connectors & Terminals Q-36

with Crimping & Removal Tools Q-36

FMS (aka Slotted MCASE) Fuse Assortment Q-99, Q-100

FMX, FMX Low Profile & FMM Fuses Q-99, Q-100

Heavy Duty Truck Circuit Breakers Q-106

Metri-Pack 280 Series Assortment Q-39, Q-42

with Crimping & Removal Tools Q-39

Weather-Pack Series Assortment Q-42

Weather-Pack Series Assortment

with Crimping & Removal Tools Q-42

##### Batteries

Rayovac Ultra-Pro Alkaline Batteries Q-109

##### Battery

Tin Plated Copper Tubular Lugs Q-67

##### Battery Terminals

Copper Tubular Lug Q-66

EcoMax Battery Ends & Shrink Tubing Assortment Q-59

EcoMax Post Top Battery Terminals Q-59

Fusion Battery Ends Q-62

Fusion Solder-On Battery Ends & Shrink Tubing Q-59, Q-62

Post Top Terminals, HD Lugs & Splices Q-59

Special Battery Ends Q-64

Tin Plated Copper Tubular Lugs Q-67

##### Bulbs

12V Mini Auto Bulbs Q-87

Automotive Bulbs Q-87

12V Miniature Automotive Bulbs Assortment Q-87

##### Cable Ties

8" Colored Cable Tie Wraps Q-77

Black Low Profile Cable Tie Wraps Q-74

Black Nylon Ty-Raps with Metal Tabs Q-70, Q-71, Q-73

Cable Tie Rack Assortment Q-73

Cable & Tubing Mounting

Tie Wraps Q-79

Colored Cable Tie Wraps Q-77

Low Profile Cable Tie Wraps Assortment Q-74

Met-Tab Cable Tie Rack Assortment Q-70

Nylon Cable Tie Wraps Q-73

Releasable Cable Tie Wraps Q-75

Standard Cable Tie Wraps Q-73

Weather-Resistant Cable Tie Wraps Q-73

#### Circuit Breakers Q-106

Automotive Circuit Breakers ATM & ATC Q-106

#### Clamps

Nylon Clamps Q-82

Nylon & Rubber Clamp Q-82

Rubber Insulated Clamps

1/4" Mounting Hole Q-82

3/8" Mounting Hole Q-83

Vinyl Coated Q-82

#### Fuses

ATC Blade-Type Fuses Travel Tray Q-93

ATC LED Smart Fuse Travel Tray Q-97

ATM Blade-Type Fuses Travel Tray Q-92

ATM LED Smart Fuses Travel Tray Q-97

ATM Low Profile Fuse Assortment Q-91

ATM Mini-Blade LED Smart Fuse Q-97

ATR, ATL & ATM Low Profile Fuses Q-89

Automotive Electrical Fuses Q-95

Automotive Fuse Holders & Accessories Q-102

Blade Fuses Q-95

LED Smart Fuse Q-97

MAXI Blade LED Smart Fuses Q-97

Micro Fuses Assortment Q-89, Q-90

Micro Fuses Travel Tray Assortment Q-89, Q-90

#### Grommets

Q-83

#### Shrink Tubing

Automotive Dual Wall Heat Shrink Tubing Q-53

Automotive Shrink Tubing

Includes Torch Q-55, Q-56

Heavy Wall Heat Shrink Tubing Q-54

#### Solder

60/40 Rosin Core Solder &

Excalibur Torch Assts Q-116

#### Tapes & Sealants

Electrical Tape Assortment Q-44

Silicone Sealing Tape Q-45

#### Terminals

Blue 16-14 Electrical Connectors Q-13

Crimp & Seal

Long Neck Crimp & Seal Terminals Q-20

Crimp & Seal Sealed Wire Connectors Q-23

Crimp & Seal Terminals Q-21

includes Torch & Butane Refill Q-21

Deutsch DT Connectors & Terminals Q-36

DTP Deutsch Connectors & Tools Assortment Q-35

Heavy Duty Wire Ends for #8, #6 & #4 GA Wire Q-14

Long Neck Crimp & Seal Terminals Q-20

Multilink Wire Ends Q-17

Includes Torch & Butane Refill Q-17

without Torch & Butane Refill Q-17

with Thermal Indicator Butt Connectors Q-17

Non-Insulated Terminals Q-7



Nylon Insulated Terminals Q-7, Q-13  
 Optiseal Heat Shrink Kits Q-26  
 OptiSeal Terminals Q-26  
 Red 22-18 Electrical Connectors Q-13  
 Vinyl Insulated Terminals Q-8  
 Wall & Lever Nut Travel Tray Q-32  
 Wall Nuts & Wire Nuts  
 Includes crimp tool Q-30, Q-32, Q-35  
 Wire Nuts Travel Tray Q-32  
 Yellow 12-10 Electrical Connectors Q-13

### Wire

General Purpose Primary Wire Q-49  
 Heavy Duty (Cross-Linked) Primary Wire Q-48

### Automotive Electrical

#### Assortments

ATC Blade-Type Fuses Travel Tray Q-93  
 ATC Mini-Blade LED Smart Fuse Q-97  
 ATM Mini-Blade LED Smart Fuse Q-97  
 Automotive Bulbs Q-87  
 Automotive Circuit Breakers ATM & ATC Q-106  
 Deutsch DT Connectors & Terminals Q-36  
 Deutsch DT Connectors & Terminals Assortment  
 with Crimping & Removal Tools Q-36  
 Heavy Duty Truck Circuit Breakers Q-106  
 LED Smart Fuse Q-97  
 Metri-Pack 280 Series Assortment Q-39  
 with Crimping & Removal Tools Q-39  
 With Crimping & Removal Tools Q-39  
 Weather-Pack Series Assortment Q-42  
 Weather-Pack Series Assortment  
 With Crimping & Removal Tools Q-42

#### Automotive Bulbs Q-84, Q-85, Q-86

#### Circuit Breakers

Blade-Type Q-103

#### Convuluted Tubing (Split Loom) Q-108

#### Deutsch Connectors & Terminals

Deutsch 2-Way Connectors Q-34  
 Deutsch 3-Way Connectors Q-34  
 Deutsch 4-Way Connectors Q-34, Q-35  
 Deutsch 6-Way Connectors Q-34  
 Deutsch 8-Way Connectors Q-34  
 Deutsch 12-Way Connectors Q-34  
 Deutsch Connector Tools Q-33, Q-37, Q-38, Q-39, Q-40  
 , Q-41, Q-42  
 Deutsch Seal Plug Q-33  
 Deutsch Terminals Q-33  
 DTP Deutsch Connectors  
 DTP 2-Way Connectors Q-35  
 DTP 4-Way Connectors Q-35  
 DTP Terminals Q-35

#### Electronic Signal Flashers Q-107

#### Fabric Loom Q-108

#### Flashers Q-107

#### Fuse Holders Q-101

#### Fuses

ATC Blade-Type Fuses Q-93

ATM Blade-Type Fuses Q-89, Q-91, Q-92  
 FMM Fuses Q-98  
 FMS Fuses Q-98  
 FMX Q-98  
 Glass Tube Fuses Q-88  
 LED Smart Fuses Q-96  
 MAXI Blade-Type Fuses Q-94

#### Metri-Pack 280 Series

Metri-Pack 1 Connectors Q-37  
 Metri-Pack 2 Connectors Q-37  
 Metri-Pack 3 Connectors Q-38  
 Metri-Pack 5 Connectors Q-38  
 Metri-Pack 12-14 Terminals Q-37  
 Metri-Pack 16-18 Terminals Q-37  
 Metri-Pack Cable Seals Q-37, Q-40, Q-41  
 Metri-Pack Cavity Plug Q-38  
 Metri-Pack Crimping Tool Q-38  
 Metri-Pack Terminal Removal Tool Q-38

#### Relay, 5 Prong Q-107

#### Spiral Wrap Q-108

#### Test Clips Q-108

#### Weather-Pack Connectors & Terminals

Weather-Pack Cable Seals Q-40  
 Weather-Pack Cavity Plug Q-40

#### Weather-Pack Terminals & Connectors

Weather-Pack 1 Connectors Q-40  
 Weather-Pack 2 Connectors Q-40  
 Weather-Pack 3 Connectors Q-41  
 Weather-Pack 4 Connectors Q-41  
 Weather-Pack 6 Connectors Q-41  
 Weather-Pack 12 GA Terminals Q-41  
 Weather-Pack 16-14 GA Terminals Q-41  
 Weather-Pack 20-18 GA Terminals Q-41  
 Weather-Pack Terminal Extractor Tool Q-41

#### Weather-Pack Terminals & Connectors

Weather-Pack 22-12GA Crimper Q-41

## **B**

#### Batteries Q-109

##### Assortments

Procell Alkaline Batteries Q-109

#### Battery Terminals

##### Accessories

Accessory Bolts Q-63  
 Battery Converters  
 Side Terminal to Post Conversion Q-63  
 Brushes Q-65  
 Cable Slugs Q-64  
 Converters Q-63  
 Nuts & Bolts, Battery Q-63  
 Power Cleaning Brushes, Battery End Q-65  
 Terminal Protectors Q-65

##### Assortments

Fusion Battery Ends Q-62  
 Fusion Solder-On Battery Ends & Shrink Tubing Q-59, Q-62



Post Top Terminals, HD Lugs & Splices Q-59  
Special Battery Ends Q-64  
**Automotive Series Emergency Style Q-63**  
**Battery Bolts Q-63**  
Accessory Q-63  
**Battery End Power Cleaning Brushes Q-65**  
**Battery / Welding Cable Q-51**  
**Converters Q-63**  
**ECOMAX**  
Flag Terminal Q-58  
Left Elbow Terminal Q-58  
Right Elbow Terminal Q-58  
**Fusion Solder-On**  
Flag Terminal Q-62  
Lugs Q-62  
Right Q-58, Q-61  
Straight Q-58, Q-61  
**Heavy Duty Lugs Q-65**  
**Heavy Duty Splices Q-65**  
**Heavy Duty Universal Q-63**  
**Lugs**  
Copper Tubular Q-66, Q-67  
Fusion Solder-On Q-62  
Tin Plated Copper Q-67  
**Marine Wing Nut Style Q-63**  
**Military Spec Q-63**  
**Nuts Q-63**  
Stud Top Q-60  
**OEM Style Q-63**  
**Post Top / Side Mount**  
Slugs Q-64  
Straight Clamp Terminal Q-60  
**Protectors Q-65**  
**Stud Top / Side Mount Q-60**  
Double Barrel (Splice) Q-60  
**Tubular Lugs Q-66, Q-67**  
**Universal Q-63**  
**Battery Terminals**  
**ECOMAX Q-58**  
Straight Clamp Q-58  
**Blade-Type Circuit Breakers Q-103**  
**Booster Cables Q-69**  
**Bulbs**  
**Assortments**  
Automotive Bulbs Q-87  
**Automotive Q-84, Q-85, Q-86**  
**Replacement, Work Light**  
9W Fluorescent Q-113  
12V 13W Fluorescent Q-113  
13W Fluorescent Q-113  
500W Halogen Work Light Bulb Q-113  
**Rough Service Q-109**

### C

#### **Cable**

**Battery / Welding Q-51**

#### **Cable Clamps Q-69**

##### **Cable Ties**

**Adjustable Cable & Hose Mounts Q-80**

**Buttonhead Q-78**

**Cable Tie Bases Q-80**

**Colored & Fluorescent Q-76**

**Dual Clamp Cable Ties Q-79**

**Low Profile Cable Tie Wraps Q-74**

**Mini Flush Cutters Q-80**

**Mounting Ties Q-78**

**Natural Nylon Q-72**

**Nylon Speedy Ties Q-75**

**Push Mounting Q-78**

**Stud Mount Cable Tie Wrap Q-78**

**Ty-Rap Black Nylon with Metal Tabs Q-70, Q-80**

**UV Black Weather-Resistant Q-72, Q-74**

##### **Circuit Breakers**

###### **Assortments**

Heavy Duty Truck Circuit Breakers Q-106

###### **Blade Type**

ATC Style Breakers

CB221 Q-104

CBB Q-104

CCB Q-104

FCB Q-104

MAXI Style Breakers

CB1911 Q-103

UCB Breakers

UCB Q-104

###### **Blade-Type**

Mini Breakers

CB212 Q-103

###### **Stud Mount**

AMG Q-105

Heavy Duty Type 1

CBC Q-105

Standard Duty Type 2

CBS Q-105

Type II - 12 volt

CBF Q-105

##### **Clamps**

###### **Adjustable Q-81**

###### **Assortments**

Nylon Clamp Q-82

Nylon & Rubber Clamp Q-82

Rubber Insulated Clamps

1/4" Mounting Hole Q-82

3/8" Mounting Hole Q-83

Vinyl Coated Clamps Q-82

###### **Chassis Clips Q-81**

###### **Nylon Clamps Q-81**

###### **Rubber Insulated Clamps Q-81**

###### **Vinyl Dipped Hose Clamps Q-81**

##### **Clips, Test Q-108**

##### **Convoluted Tubing Q-108**

##### **Crimping Tools**



**E  
L  
E  
C  
T  
R  
I  
C  
A  
L**

- Indent Crimper Q-69**
- Ratcheting Crimp Tool Q-118**
- Universal Crimping Tool Q-68**
- Wire Crimp Tool Q-118**
- Customer Awards (Z1A)**
- Knives & Cutting Tools**
  - Mini Flush Cutters Q-80
- Tools, Hand**
  - Easy Stripper Self-Adjusting Wire Stripp Q-118

**E**

- Extension Cords**
  - Heavy Duty**
    - 50' Single Tap Q-114

**F**

- Flashers Q-107**
- Flux Q-64**
- Fuse Holders Q-101**
- Fuses**
  - Assortments**
    - ATC Mini-Blade LED Smart Fuse Q-97
    - ATM Mini-Blade LED Smart Fuse Q-97
    - Automotive Electrical Fuses Q-91, Q-92, Q-93, Q-95, Q-102
    - LED Smart Fuse Q-97
  - Blade Type**
    - LED Smart Fuses
      - ATM Q-96
      - ATO/ATC Q-96
      - MAXI Q-96
    - Blade-Type**
      - ATC Q-93
      - ATM Q-89, Q-91, Q-92
      - MAXI Q-94
  - FMX Q-98**
  - FMX Low-Profile Q-98**
  - Fuse Holders Q-101**
  - Fusepuller Q-88**
  - Fusible Links Q-105**
  - Glass Tube**
    - AGA Q-88
    - AGC Q-88
    - AGW Q-88
    - AGX Q-88
    - GBC Q-88
    - SFE Q-88

**G**

- Grommets Q-83**
  - Assortments**
    - Grommet Kit Q-83

**L**

- Light Bulbs**
  - Accessories**
    - Replacement Bulbs
    - 9W Fluorescent Work Light Q-113
  - Rough Service Q-109**
- Lights**
  - Accessories**
    - Adapters
    - Single Tap Q-115
    - Triple Tap Q-115
    - Double Hooks for Tube Lights Q-113
    - Extension Cords
    - 25' Single Tap Q-114
    - 50' Single Tap Q-114
    - 100' Single Tap Q-114
    - Replacement Bulbs
    - 12V 13W Fluorescent Work Light Q-113
    - 13W Fluorescent Work Light Q-113
    - Replacement Heads
    - 18W Fluorescent Light Q-113
    - Replacement Plugs
    - Female - 3 Wire Q-113
    - Male - 3 Wire Q-113
    - Replacement Tube Assembly
    - 13W Worklights Q-113
    - Replacment Bulbs
    - 500W Halogen Worklight Q-113
  - Halogen Work Lights**
    - Professional Series 500W Halogen Work Light Q-111
  - LED Worklights (Corded)**
    - LED Work Light Q-111
    - PRO 1200 LUMEN LED WORKLIGHT WITH 25 FT CORD Q-110
    - Professional Series 60 LED on a 50" Metal Reel Q-110
  - Rechargeable**
    - Omni 2K Worklight Q-111
    - Omni 3K Worklight Q-111
    - Rechargeable LED Area Worklight with Magnetic Base Q-111
    - Under-Hood Worklight Q-110
- Loom**
  - Fabric Q-108**
  - Split Q-108**

**R**

- Rechargeable Work Lights Q-111**

**S**

- Shrink Tubing**
  - 6 to 1 Hi-Ratio Q-52**
  - Assortments**
    - Automotive Shrink Tubing
    - Includes Torch Q-55, Q-56
    - Heavy Wall Heat Shrink Tubing Q-54
    - Heavy Wall Heat Shrink Tubing Assortment II Q-52



**Color Coded Dual Wall Shrink Tubing** Q-55

**Dual Wall**

Clear Q-53

**Heavy Wall** Q-52

**High Adhesive Flow Heat** Q-54

**Optiseal Adhesive-Lined** Q-56

**Thin Wall** Q-55, Q-57

### **Solder**

**60/40 Rosin Core Solder** Q-116

**Assortments**

60/40 Rosin Core Solder &

Excalibur Torch Assts Q-116

Solder Combo Assortments Q-117

**NOKORODE® Regular Paste Flux** Q-116

**Silvabrite 100% Solder** Q-115

**Silver Bearing Solder** Q-115

**Slugs** Q-64

### **Split Tubing & Sleeving**

**Convolute Tubing** Q-108

**Split Braided Sleeving** Q-108

**Split Tubing & Sleeve Installation Tool** Q-108

## **I**

### **Tapes & Sealants**

**Assortments**

Electrical Tape Q-44

**Black Liquid Electrical Tape** Q-44

**Blue Painter's Tape** Q-47

**Colored Electrical Tape** Q-44

**Duct Tape** Q-47

**Electrical Tape** Q-43, Q-44

**Fusion Tape** Q-44

**Liquid Electrical Tape** Q-44

**Masking Tape** Q-47

**Reflective Tape**

Red & White Conspicuity Tape Q-46

Yellow Conspicuity Tape Q-46

**Scotch Brand 33+**

Electrical Tape Q-43

**Scotch Brand 88 Electrical Tape** Q-43

**Sealing Compound** Q-45

**Silicone Sealing Tape** Q-45

**Teflon Tape** Q-45

### **Terminals**

**Crimp & Seal**

Butt Connectors Q-19

General Info Q-18

Quick Slides Q-19

Ring Terminals Q-19

Snap Plugs Q-19

Spade Terminals Q-19

Step Butt Connectors Q-19

Long Neck Terminals Q-20

**Crimp & Seal Long Neck Terminals** Q-20

**Heavy Duty Large Gauge**

Butt Connectors

Butt Connectors (WP) Q-14

### **HydraLink**

HydraLink Closed End Connectors Q-22

HydraLink Inline Butt Connectors Q-22

### **Multilink**

Butt Connectors Q-16

Butt Connectors with Thermal Indicator Q-16

General Info Q-15

Quick Slides - Female Q-16

Quickslides - Male Q-16

Ring Terminals Q-16

Spade Terminals Q-16

Step-Butt Connectors Q-16

### **Non-Insulated**

Brazed Seam

Butt Connectors Q-8

Ring Terminals Q-8

Butted Seam

Butt Connectors Q-7

Quickslide Terminals Q-7

Ring Terminals Q-7

Snap Plug Connectors Q-7

Spade Terminals Q-7

### **Nylon Insulated**

3 & 4-Way Connectors Q-10

Butt Connectors

Insulation Grip (NB) Q-10

Moisture Resistant (NBM) Q-10

Seamless (SN) Q-10

Window Q-10

Closed End Connectors Q-12

Cool Seal Terminals

Butt Connectors Q-27

Flag Terminals Q-12

Heavy Duty Q-14

Heavy Duty Large Gauge

Ring Terminals Q-14

Multi-Stacks Q-12

Pin Terminals Q-11

Quick Slides

Female Q-12

Female - Fully Insulated Q-12

Male Q-12

Male Fully Insulated Q-12

Ring Terminals Q-11

Snap Plugs

Female Q-12

Male Q-12

Spade Terminals

Standard Q-11

### **Optiseal**

Butt Connectors Q-24, Q-25

Female Bullet Receptacle Connectors Q-25





- Male Bullet Plug Connectors Q-25
- Male & Female Connectors Q-25
- Ring Terminals Q-24
- Spade Terminals Q-25
- Step Butt Connectors Q-24

### Quick Connectors

- 3M Performance Plus Wire Connectors Q-28
- Instant Auto Connectors Q-31
- Lever Nut Q-29
- Lever-Nuts Q-30
- Self-Stripping Disconnects Q-31
- Self-Stripping Pigtail Connector Q-31
- Wall Nuts Q-29, Q-30
- Wire Nuts Q-31

### Solder & Seal

- Ring Terminals Q-27
- Spade Terminals Q-27

### Vinyl Insulated Q-9

- Butt Connectors Q-9
- Quickslide Terminal Q-9
- Ring Terminals Q-9
- Snap Plugs Q-9
- Spade Terminals Q-9
- Step-Butt Connectors Q-9

### Terminals, Battery

#### Accessories

- Accessory Bolts Q-63
- Battery Converters Q-63
- Battery End Power Cleaning Brushes Q-65
- Battery Nuts & Bolts Q-63
- Terminal Protectors Q-65

#### Assortments

- Cable Slugs Q-64
- Fusion Battery Ends Q-62
- Fusion Solder-On Battery Ends & Shrink Tubing Q-59, Q-62
- Post Top Terminals, HD Lugs & Splices Asst Q-59
- Special Battery Ends Q-64

### Automotive Series Emergency Style Q-63

#### ECOMAX

- Flag Terminal Q-58
- Left Elbow Terminal Q-58
- Right Elbow Terminal Q-58
- Straight Clamp Q-58

#### Fusion Solder-On

- Flag Terminal Q-62
- Heavy Wall Lugs Q-62
- Right Clamp Q-58, Q-61
- Straight Clamp Q-58, Q-61

### Heavy Duty Universal Q-63

#### Lugs

- Heavy Duty Q-65
- Tubular Q-66, Q-67

### Marine Wing Nut Style Q-63

### Military Spec Q-63

### OEM Style Q-63

### Stud Top / Side Mount

- Double Barrel (Splice) Q-60
- Straight Clamp Q-60
- Stud Top Battery Bolts Q-60
- Stud Top Battery Nuts Q-60

### Test Clips Q-108

#### Tools

#### Battery & Crimping

- 12 Volt Tester Q-69
- Battery Cable Stripper Q-69
- Cable Clamps Q-69
- Cable Cutter Q-69
- High Capacity Hydraulic Crimper Q-68
- Indent Crimper Q-69
- Professional Grade Heavy Duty Booster Cables Q-69
- Ratcheting Crimp Tool Q-118
- Ratcheting Wire Terminal Crimper Q-118
- Universal Crimping Tool Q-68
- Wire / Cable Cutter Q-117
- Wire Crimp Tool Q-118
- Wire Cutter Q-69

### Dual Temp Electric Heat Gun Q-117

#### Hand

- Cable Tie Gun Q-80
- High Capacity Hydraulic Crimper Q-68
- Mini Cable Tie Gun Q-80

#### Power

- Dual Temp Electric Heat Gun Q-117
- Dual Temp Electric Heat Gun Q-117
- Hydraulic Crimper Q-68

#### Solder & Welding

- Butane Refill 42 Grams Q-116
- Industrial Butane Torch Q-117
- Microtorch Butane Torch Q-117

#### Torches

### Butane Refill Q-116

### Industrial Butane Torch Q-117

### Microtorch Butane Torch Q-117

## W

#### Wire

### Battery Cable Q-51

### Jacketed Multiple Conductor Q-50

#### Nuts

- 3M Performance Plus Q-28
- Wall Nuts Q-29, Q-30
- Wire Nuts Q-31

### Parallel Multiple Conductor Q-50

#### Primary

- General Purpose Thermoplastic Q-49
- Heavy Duty Wire (Cross-Linked) Q-48

### Speaker Wire Q-50

### Trailer Cable Q-50

### Welding Cable Q-51

### With Crimping & Removal Tools Q-39



### Non-Insulated Butted Seam Terminals

The most economical terminal. Used where special performance or installation characteristics are not needed. Beveled mouth facilitates wire insertion.

#### RING TERMINALS

IBS No.	Wire	Stud	Qty
11-6	22-18	#6	100
11-8	22-18	#8	100
11-10	22-18	#10	100
12-6	16-14	#6	100
12-10	16-14	#10	100
12-14	16-14	1/4	100
13-8	12-10	#8	50
13-10	12-10	#10	50
13-14	12-10	1/4	50
13-56	12-10	5/16	50
13-38	12-10	3/8	50
13-500P	12-10	1/2	50



#### SPADE TERMINALS

IBS No.	Wire	Stud	Qty
31-10	22-18	#10	100
32-10	16-14	#10	100
33-10	12-10	#10	50



#### QUICKSLIDE TERMINALS

IBS No.	Wire	Type	Blade	Qty
72F-250-32	16-14	Female	1/4	100
72M-250-32	16-14	Male	1/4	100
73F-250-32	12-10	Female	1/4	50
73M-250-32	12-10	Male	1/4	50



#### BUTT CONNECTORS

IBS No.	Wire	Qty
61S	22-18	100
62S	16-14	100
63S	12-10	50



#### SNAP PLUGS

IBS No.	Wire	Type	Blade	Qty
82F-156-NL*	16-14	Female	.156	100
82M-156	16-14	Male	.156	100



\* Nylon Insulated

### Non-Insulated Terminal Assortment (Z02)

Top 24 Wire Ends

IBS No. 211R • 24 Items • 635 Pcs

Packaged in a locking steel drawer for easy storage and organization

IBS, Inc. SPECIALTY PRODUCTS FOR MAINTENANCE & REPAIR INDUSTRIALBOLT.COM © 200-678-1906		Non-Insulated Butted Seam Top 24 Wire Ends			
Assortment No. 211R					
61S 22-18 BUTT CONN NON INSUL	11-6 22-18 RING TERM. 6 STUD NO-INS	11-8 22-18 RING TERM 8 STUD NO-INS	11-10 22-18 RING TERM 10 STUD NO-INS	31-10 22-18 SPADE TERM #10 STUD	72F-250-32 16-14 FEMALE QUICK SLIDE
62S 16-14 BUTT CONN NON INSULATED	12-6 16-14 RING TERM. 6 STUD NO-INS	12-10 16-14 RING TERM 10 STUD NO-INS	12-14 16-14 RING TERM #14 STUD NO-IN	32-10 16-14 #10 SPADE TERM	72M-250-32 16-14 MALE QIK SLIDE NO INSUL.
63S 12-10 BUTT CONN. NON INSUL.	82F-156-NL 16-14 FEMALE SNAP PLUG VINYL	82M-156 16-14 MALE SNAP PLUG	13-8 12-10 RING TERM 8 STUD NON-INS	33-10 12-10 SPADE TERM #10 STUD	73M-250-32 12-10 MALE QIK SLIDE NO INSUL.
13-10 12-10 RING TERM #10 STUD NO-IN	13-14 12-10 RING TERM 1/4 STUD	13-56 12-10 RING TERM 5/16 STUD	13-38 12-10 RING TERM. 3/8 STUD NO-I	13-500 12-10 RING TERM 1/2 STUD	73F-250-32 12-10 FEMALE QUICK SLIDE



# IBS, INCORPORATED

## Non-Insulated Connectors Q3A

### Non-Insulated Brazed Seam

Beveled mouth facilitates wire insertion. It can be crimped anywhere on the barrel surface. Silver brazed seam will not open under crimping pressure or operating stresses. Unlike butted seam parts, stranded wire cannot escape barrel confines during or after crimping.

#### RING TERMINALS

IBS No.	Wire	Stud	Qty
14-10SW	#8	#10	10
14-14SW	#8	1/4	10
14-56W	#8	5/16	10
14-38W	#8	3/8	10
15-14SW	#6	1/4	10
15-56W	#6	5/16	10
15-38W	#6	3/8	10
15-500SW	#6	1/2	10
16-10W	#4	#10	10
16-14W	#4	1/4	10
16-56W	#4	5/16	10
16-38W	#4	3/8	10
16-500SW	#4	1/2	10



#### BUTT CONNECTORS

IBS No.	Wire	Qty
64W	#8	10
65W	#6	10
66W	#4	10



### Vinyl Insulated Terminal Assortment (Z02)

#### Vinyl Insulated Solderless Terminals

IBS No. 201R • 24 Items • 515 Pcs

Packaged in a locking steel drawer for easy storage and organization



#### Vinyl Insulated Solderless Terminals

Assortment No. 201R

61-P 22-18 BUTT CONN VINYL 	11-6P 22-18 RING TERM #6 STUD VINYL 	11-8P 22-18 RING TERM #8 STUD VINYL 	11-10P 22-18 RING TERM #10 STUD VINYL 	31-10P 22-18 SPADE TERM #10 STUD 	72F-250-32P 16-14 FEMALE QIK SLIDE VINYL 
62-P 16-14 BUTT CONN VINYL 	12-6P 16-14 RING TERM #6 STUD VINYL 	12-10-P 16-14 RING TERM 10 STUD VINYL 	12-14SP 16-14 RING TERM 1/4 STUD VINYL 	32-10P 16-14 SPADE TERM 10 STUD VINYL 	72M-250-32P 16-14 MALE QIK SLIDE VINYL 
63-P 12-10 BUTT CONN VINYL 	82F-156-NL 16-14 FEMALE SNAP PLUG VINYL 	82M-156P 16-14 MALE SNAP PLUG VINYL 	33-10P 12-10 SPADE TERM #10 STUD 	13-8P 12-10 RING TERM #8 STUD VINYL 	73M-250-32P 12-10 MALE QIK SLIDE VINYL 
13-10P 12-10 RING TERM 10 STUD VINYL 	13-14SP 12-10 RING TERM 1/4 STUD VINYL 	13-56P 12-10 RING TERM 5/16 STUD VINYL 	13-38P 12-10 RING TERM 3/8 STUD VINYL 	13-500P 12-10 RING TERM 1/2 STUD VINYL 	73F-250-32P 12-10 FEMALE QIK SLIDE VINYL 

ELECTRICAL



# IBS, INCORPORATED

## Vinyl Insulated Terminals Q3B



### Vinyl Insulated Butted Seam Terminals

Used where an insulated barrel is necessary and desirable. Terminal consists of butted part with flared, rigid, molded polyvinyl chloride sleeve securely attached and funneled for easy entry. Wire insulation positions itself against funnel portion of vinyl sleeve this eliminating strand hang-up. Crimping barrel and flared portion of vinyl sleeve provide excellent electrical contact plus mechanical stress relief at junction of insulation and barrel. Insulation has a non-skid ridge for ease of positioning crimping tool. Industry standard color coding indicates wire range. Insulators are rated at a continuous operating temperature range from -40°F to 220°F (-40°C to 105°C). U.L. Listed and CSA Certified for 600 volt building wire and 1000 volt signs and fixtures.

#### RING TERMINALS



IBS No.	Wire	Stud	Color	Qty
11-6P	22-18	#6	Red	100
11-8P	22-18	#8	Red	100
11-10P	22-18	#10	Red	100
12-6P	16-14	#6	Blue	100
12-8-P	16-14	#8	Blue	100
12-10-P	16-14	#10	Blue	100
12-14SP	16-14	1/4	Blue	100
13-8P	12-10	#8	Yellow	50
13-10P	12-10	#10	Yellow	50
13-14SP	12-10	1/4	Yellow	50
13-56P	12-10	5/16	Yellow	50
13-38P	12-10	3/8	Yellow	50
13-500P	12-10	1/2	Yellow	50

#### SPADE TERMINALS



IBS No.	Wire	Stud	Color	Qty
31-10P	22-18	#10	Red	100
32-10P	16-14	#10	Blue	100
33-10P	12-10	#10	Yellow	50

#### BUTT CONNECTORS



IBS No.	Wire	Color	Qty
61-P	22-18	Red	100
62-P	16-14	Blue	100
63-P	12-10	Yellow	100

#### STEP-BUTT CONNECTORS



IBS No.	Wire	Color	Qty
SB1210-1614	12-10 to 16-14	Yellow w/Blue	100
SB1614-2218	16-14 to 22-18	Blue w/Red	100

#### QUICKSLIDE TERMINALS



All 1/4" Blade Size

IBS No.	Wire	Type	Color	Qty
72F-250-32P	16-14	Female	Blue	50
72M-250-32P	16-14	Male	Blue	50
73F-250-32P	12-10	Female	Yellow	50
73M-250-32P	12-10	Male	Yellow	50

#### SNAP PLUGS



IBS No.	Wire	Color	Type	Qty
82F-156-NL	16-14	Blue	Female	100
82M-156P	16-14	Blue	Male	100

ELECTRICAL



# IBS, INCORPORATED

## Nylon Insulated With Grip Q3C

### Nylon Insulated Butted Seam with Insulation Grip

These terminals are used where an insulated barrel and positive insulation grip are necessary or desirable. The terminal consists of a butted seam with a flared seamless brass sleeve securely attached and covered with a flared, molded nylon sleeve. Wire insulation positions itself against funnel portion of brass sleeve. Crimping barrel and flared portion of sleeve provide excellent electrical contact plus mechanical stress relief at junction of insulation and barrel. Positioning crimp tool is nearly mistake-proof due to a "step" in the nylon insulation. Industry standard color coding indicates wire range. Insulators are rated at a continuous operating temperature range from -40°F to 220°F (-40°C to 105°C). U.L. Listed and CSA Certified for 600 volt building wire and 1000 volt signs and fixtures.

### Butt Connectors

#### Seamless

- Economical.
- Nylon Insulated.
- Crimp once on each end.



IBS No.	Wire	Color	Qty
60-SN	24-22	Yellow	100
61-SN	22-18	Red	100
62-SN	16-14	Blue	100
63-SN	12-10	Yellow	50

#### Insulation Grip

- Nylon Insulated.
- Double crimp to secure wire and insulation.
- Brass sleeve provides optimum grip on insulation to give strain relief and vibration protection.



IBS No.	Wire	Color	Qty
61-NB	22-18	Red	100
62-NB	16-14	Blue	100
63-NB	12-10	Yellow	50

#### Window

- Military approved according to MIL-T-7928/5.
- Nylon Insulated.
- Insulation grip provides superior strain relief.
- Military approved to withstand the most harsh environments.
- Inspection window guarantees proper wire insertion and crimp tool alignment.



IBS No.	MIL Spec	Wire	Color	Qty
61-WB	M7928/5-3	22-18	Red	50
62-WB	M7928/5-4	16-14	Blue	50
63-WB	M7928/5-5	12-10	Yellow	25

#### Moisture Resistant (NBM)

- Sealant Filled.
- Insulation grip for strain relief and vibration protection.
- Withstands high temperatures, car and truck wash solutions.
- Remains stable over a wide temperature range — accepts fine strand wire down to 0°F.
- Protects against corrosive environments — road chemicals, animal waste, salt spray and exhaust fumes.
- Withstands temperatures of -50°F to 220°F for improved brake and tail light integrity in all weather.
- Double crimp to secure wire and insulation — no heat or chemicals needed.



IBS No.	Wire	Color	Qty
61NBM	22-18	Red	50
62NBM	16-14	Blue	50
63NBM	12-10	Yellow	25

#### 3 & 4-Way Connectors



##### 3-WAY CONNECTORS

IBS No.	Wire	Color	Qty
322NB	22-18	Red	50
316NB	16-14	Blue	25
312NB	12-10	Yellow	25

##### 4-WAY CONNECTORS



IBS No.	Wire	Color	Qty
416NB	16-14	Blue	25

ELECTRICAL



### Ring Terminals



IBS No.	Wire	Stud	Color	Qty
11-4SNB	22-18	#3-4	Red	100
11-6SNB	22-18	#5-6	Red	100
11-8SNB	22-18	#8	Red	100
11-10NB	22-18	#10	Red	100
11-14SNB	22-18	1/4	Red	100
11-56NB	22-18	5/16	Red	100
11-38NB	22-18	3/8	Red	100
12-4SNB	16-14	#4	Blue	100
12-6SNB	16-14	#6	Blue	100
12-8SNB	16-14	#8	Blue	100
12-10NB	16-14	#10	Blue	100
12-14SNB	16-14	1/4	Blue	100
12-56SNB	16-14	5/16	Blue	100
12-38NB	16-14	3/8	Blue	100
13-6SNB	12-10	#6	Yellow	50
13-8SNB	12-10	#8	Yellow	50
13-10NB	12-10	#10	Yellow	50
13-14SNB	12-10	1/4	Yellow	50
13-56SNB	12-10	5/16	Yellow	50
13-38SNB	12-10	3/8	Yellow	50
13-500NB	12-10	1/2	Yellow	50

### Spade Terminals



IBS No.	Wire	Stud	Color	Qty
31-6NB	22-18	#6	Red	100
31-8NB	22-18	#8	Red	100
31-10NB	22-18	#10	Red	100
32-6NB	16-14	#6	Blue	100
32-8NB	16-14	#8	Blue	100
32-10NB	16-14	#10	Blue	100
33-8NB	12-10	#8	Yellow	50
33-10NB	12-10	#10	Yellow	50

### Block Spade Terminals



IBS No.	Wire	Stud	Color	Qty
BS-31-6-NB	22-18	#6	Red	100
BS-31-10-NB	22-18	#10	Red	100
BS-32-6-NB	16-14	#6	Blue	100
BS-32-8-NB	16-14	#8	Blue	100
BS-32-10-NB	16-14	#10	Blue	100
BS-33-10-NB	12-10	#10	Yellow	50

### Snap Spade Terminals



IBS No.	Wire	Stud	Color	Qty
SS-31-6-NB	22-18	#6	Red	100
SS-31-8-NB	22-18	#8	Red	100
SS-31-10-NB	22-18	#10	Red	100
SS-32-6-NB	16-14	#6	Blue	100
SS-32-8-NB	16-14	#8	Blue	100
SS-32-10-NB	16-14	#10	Blue	100

### Hook Terminals



IBS No.	Wire	Stud	Color	Qty
41-6-NB	22-18	#6	Red	100
41-8-NB	22-18	#8	Red	100
42-8-NB	16-14	#8	Blue	100
42-10-NB	16-14	#10	Blue	100
43-10-NB	12-10	#10	Yellow	50

### Pin Terminals



IBS No.	Wire	Color	Qty
81P-47-NB	22-18	Red	100
82P-47-NB	16-14	Blue	100
83P-55-NB	12-10	Yellow	25

ELECTRICAL



# IBS, INCORPORATED

## Nylon Insulated With Grip Q3C

E  
L  
E  
C  
T  
R  
I  
C  
A  
L

### Quick Slides



**MALE QUICK SLIDES - FULLY INSULATED**  
NYLON-INSULATED INSULATION GRIP

IBS No.	Wire	Blade	Color	Qty
71M-187-20-NBL	22-18	3/16	Red	50
71M-250-32-NBL	22-18	1/4	Red	50
72M-187-20-NBL	16-14	3/16	Blue	50
72M-250-32-NBL	16-14	1/4	Blue	50
73M-250-32-NBL	12-10	1/4	Yellow	25

**FEMALE QUICK SLIDES - FULLY INSULATED**  
NYLON-INSULATED INSULATION GRIP

IBS No.	Wire	Blade	Color	Qty
71F-187-20-NBL	22-18	3/16	Red	50
71F-250-32-NBL	22-18	1/4	Red	50
72F-187-20-NBL	16-14	3/16	Blue	50
72F-250-32-NBL	16-14	1/4	Blue	50
73F-250-32-NBL	12-10	1/4	Yellow	25



**MALE QUICK SLIDES**

IBS No.	Wire	Blade	Color	Qty
71M-187-20-NB	22-18	3/16	Red	50
71M-250-32-NB	22-18	1/4	Red	50
72M-187-20-NB	16-14	3/16	Blue	50
72M-250-32-NB	16-14	1/4	Blue	50
73M-250-32-NB	12-10	1/4	Yellow	25



**FEMALE QUICK SLIDES**

IBS No.	Wire	Blade	Color	Qty
71F-187-20-NB	22-18	3/16	Red	50
71F-250-32-NB	22-18	1/4	Red	50
72F-187-20-NB	16-14	3/16	Blue	50
72F-250-32-NB	16-14	1/4	Blue	50
73F-250-32-NB	12-10	1/4	Yellow	25

### Flag Terminals



**FEMALE**

IBS No.	Wire	Blade	Color	Qty
71F-250-90-NBL	22-18	1/4	Red	50
72F-250-90-NBL	16-14	1/4	Blue	50

### Snap Plugs



**MALE SNAP PLUGS**

IBS No.	Wire	Blade	Color	Qty
81M-156-NB	22-18	5/32	Red	50
82M-156-NB	16-14	5/32	Blue	50
82M-180-NB	16-14	3/16	Blue	50



**FEMALE SNAP PLUGS**

IBS No.	Wire	Plug	Color	Qty
81F-156-NBL	22-18	5/32	Red	50
82F-156-NBL	16-14	5/32	Blue	50
82F-180-NBL	16-14	3/16	Blue	50

### Multi-Stacks



IBS No.	Wire	Blade	Color	Qty
772-250-NB	16-14	1/4	Blue	50

### Closed End Connectors



IBS No.	Wire	Color	Qty
722-N	22-14	Clear	50
718-N	18-10	Clear	100
4066A	#8	Clear	50





### Nylon Insulated Terminal Assortment (Z02)

Nylon Insulated Double Grip Solderless Terminals

**IBS No. 101R • 24 Items • 270 Pcs**  
Packaged in a locking steel drawer for easy storage and organization



IBS, Inc. QUALITY PRODUCTS FOR THE ELECTRICAL & POWER INDUSTRIES					Nylon Insulated Double Grip Solderless Terminal	
61-SN 22-18 BUTT CONNECTOR	11-6SNB 22-18 X #6 RING TERMINAL	11-8SNB 22-18 X #8 RING TERMINAL	11-10NB 22-18 X #10 RING TERMINAL	31-10NB 22-18 X #10 SPADE TERMINAL	72P-250-32-NBL 16-14 FEMALE QUICK SLIDE	
62-SN 16-14 BUTT CONNECTOR	12-6SNB 16-14 X #6 RING TERMINAL	12-10NB 16-14 X #10 RING TERMINAL	12-14SNB 16-14 X 1/4" RING TERMINAL	32-10NB 16-14 X #10 SPADE TERMINAL	72M-250-32-NBL 16-14 MALE QUICK SLIDE	
63-SN 12-10 BUTT CONNECTOR	82P-156-NBL 16-14 FEMALE BULLET	82M-156-NB 16-14 MALE BULLET	33-10NB 12-10 X #10 SPADE TERMINAL	13-8SNB 12-10 X #8 RING TERMINAL	73M-250-32-NBL 12-10 MALE QUICK SLIDE	
13-10NB 12-10 X #10 RING TERMINAL	13-14SNB 12-10 X 1/4" RING TERMINAL	13-56SNB 12-10 X 5/16" RING TERMINAL	13-38SNB 12-10 X 3/8" RING TERMINAL	13-50SNB 12-10 X 1/2" RING TERMINAL	75P-250-32-NBL 12-10 FEMALE QUICK SLIDE	

### Red 22-18 Electrical Connectors

**IBS No. 400R • 20 Items • 215 Pcs**  
Packaged in a locking steel drawer for easy storage and organization



IBS, Inc. QUALITY PRODUCTS FOR THE ELECTRICAL & POWER INDUSTRIES					Red 22-18 Electrical Connectors	
61-SN 22-18 BUTT CONN NYLON	61NMB 22-18 MOISTURE RESIST BUTT CON	85S18 20-18 MULTILINK BUTT CONNECTOR	31-6NB 22-18 SPADE TERM 6 STUD NYLON	31-8NB 22-18 SPADE TERM 8 STUD NYLON	31-10NB 22-18 SPADE TERM 10 STUD NYLON	
11-6NB 22-18 RING TERM 6 STUD NYLON	11-8NB 22-18 RING TERM 8 STUD NYLON	11-10NB 22-18 RING TERM 10 STUD NYLON	11-14NB 22-18 RING TERM 1/4 STUD NYLON	11-56NB 22-18 RING TERM 5/16 STUD NYLON	11-38NB 22-18 RING TERM 3/8 STUD NYLON	
81M-156-NB 22-18 MALE SNAP PLUG FULL NY	81P-156-NBL 22-18 FEMALE SNAP PLUG FULL NY	71M-250-32-NBL 22-18 MALE QIK SLIDE FULL	71P-250-32-NBL 22-18 FEMALE QIK SLIDE FULL NY	71M-250-32-NB 22-18 MALE QIK SLIDE NYLON	71P-250-32-NB 22-18 FEMALE QIK SLIDE NYLON	
71P-250-90-NBL 22-18 1/4 90DGR F QIK	81P-47-NB 22-18 PIN TERMINAL NYLON					

### Blue 16-14 Electrical Connectors

**IBS No. 401R • 20 Items • 215 Pcs**  
Packaged in a locking steel drawer for easy storage and organization



IBS, Inc. QUALITY PRODUCTS FOR THE ELECTRICAL & POWER INDUSTRIES					Blue 16-14 Electrical Connectors	
62-SN 16-14 BUTT CONN NYLON	62NMB 16-14 MOISTURE RESIST BUTT CON	85S14 16-14 MULTILINK BUTT CONNECTOR	32-6NB 16-14 SPADE TERM 6 STUD NYLON	32-8NB 16-14 SPADE TERM 8 STUD NYLON	32-10NB 16-14 SPADE TERM 10 STUD NYLON	
12-6NB 16-14 RING TERM 6 STUD NYLON	12-8NB 16-14 RING TERM 8 STUD NYLON	12-10NB 16-14 RING TERM 10 STUD NYLON	12-14NB 16-14 RING TERM 1/4 STUD NYLON	12-56NB 16-14 RING TERM 5/16 STUD NYLON	12-38NB 16-14 RING TERM 3/8 STUD NYLON	
82M-156-NB 16-14 MALE SNAP PLUG NYLON	82P-156-NBL 16-14 FEMALE SNAP PLUG FULL NY	72M-250-32-NBL 16-14 MALE QIK SLIDE FULL	72P-250-32-NBL 16-14 FEMALE QIK SLIDE FULL NY	72M-250-32-NB 16-14 MALE QIK SLIDE NYLON	72P-250-32-NB 16-14 FEMALE QIK SLIDE NYLON	
72P-250-90-NBL 16-14 90DGR 1/4 F QIK	82P-47-NB 16-14 PIN TERMINAL NYLON					

### Yellow 12-10 Electrical Connectors (Z02)

**IBS No. 402R • 16 Items • 175 Pcs**  
Packaged in a locking steel drawer for easy storage and organization



IBS, Inc. QUALITY PRODUCTS FOR THE ELECTRICAL & POWER INDUSTRIES					Yellow 12-10 Electrical Connectors	
63-SN 12-10 BUTT CONN NYLON	63NMB 12-10 MOISTURE RESIST BUTT CON	85S10 12-10 MULTILINK BUTT CONNECTOR	33-6NB 12-10 SPADE TERM 6 STUD NYLON	33-8NB 12-10 SPADE TERM 8 STUD NYLON	33-10NB 12-10 SPADE TERM 10 STUD NYLON	
13-10NB 12-10 RING TERM 10 STUD NYLON	13-14NB 12-10 RING TERM 1/4 STUD NYLON	13-56NB 12-10 RING TERM 5/16 STUD NYLON	13-38NB 12-10 RING TERM 3/8 STUD NYLON	13-50NB 12-10 RING TERM 1/2 STUD NYLON		
13-8SNB 12-10 RING TERM 8 STUD NYLON	73M-250-32-NBL 12-10 MALE QIK SLIDE FULL NYLON	73P-250-32-NBL 12-10 FEMALE QIK SLIDE FULL NY	73M-250-32-NB 12-10 MALE QIK SLIDE NYLON	73P-250-32-NB 12-10 FEMALE QIK SLIDE NYLON		
83P-55-NB 12-10 PIN TERMINAL NYLON						

ELECTRICAL





# IBS, INCORPORATED

## Nylon Insulated Q3C/Vinyl Q3B

### Heavy Duty Terminals

- 25% more metal than 12-14 GA.
- Covers three (3) wire sizes including the two most popular — 12 & 14.
- Heavier metal gives vibration-free contact where other terminals may fail.
- Resists cracking and splitting after bending or crimping.
- Provides high insulation heat range — 250° continuous, 350° intermittent.
- Ideal for starters, alternators, generators, etc.



NYLON-INSULATED INSULATION GRIP (NB)

IBS No.	Wire	Stud	Color	Qty
123-10-NB	16-12	#10	Yellow	25
123-14-NB	16-12	1/4	Yellow	25
123-56-NB	16-12	5/16	Yellow	25
123-38-NB	16-12	3/8	Yellow	25
123-500-NB	16-12	1/2	Yellow	25

### Heavy Duty Large Gauge Brazed Seam

Silver Brazed to Eliminate Cracking & Splitting

### Ring Terminals



IBS No.	Wire	Stud	Color	Qty
14-10S-WN	8 GA	#10	Red	10
14-14S-WN	8 GA	1/4	Red	10
14-56-WN	8 GA	5/16	Red	10
14-38-WN	8 GA	3/8	Red	10
14-500S-WN	8 GA	1/2	Red	10
15-10S-WN	6 GA	#10	Blue	10
15-14S-WN	6 GA	1/4	Blue	10
15-56-WN	6 GA	5/16	Blue	10
15-38-WN	6 GA	3/8	Blue	10
15-500S-WN	6 GA	1/2	Blue	10
16-10-WN	4 GA	#10	Yellow	10
16-14-WN	4 GA	1/4	Yellow	10
16-56-WN	4 GA	5/16	Yellow	10
16-38-WN	4 GA	3/8	Yellow	10
16-500S-WN	4 GA	1/2	Yellow	10

### Butt Connectors (Q3B)

Vinyl



#### BUTT CONNECTORS VINYL (WP)

IBS No.	Wire	Color	Qty
64-WP	8 GA	Red	10
65-WP	6 GA	Blue	10
66-WP	4 GA	Yellow	10

### Heavy Duty Wire Ends for #8, #6 & #4 GA Wire Assortment (Z02)

IBS No. 159R • 18 Items • 180 Pcs  
Packaged in a locking steel drawer for easy storage and organization


IBS, Inc.					Heavy Duty Wire Ends for #8, #6 & #4 GA Wire				
Assortment No. 159R									
64-WP #8 BUTT CONNECTOR VINYL	65-WP #6 BUTT CONNECTOR VINYL	66-WP #4 BUTT CONNECTOR VINYL							
16-10-WN #4 RING TERM. 10 STUD NYLON	16-14-WN #4 RING TERM. 1/4 STUD NYLON	16-56-WN #4 RING TERM. 5/16 STUD NYLON	16-38-WN #4 RING TERM. 3/8 STUD NYLON	16-500S-WN #4 RING TERM. 1/2 STUD NYLON					
15-10S-WN #6 RING TERM. 10 STUD NYLON	15-14S-WN #6 RING TERM. 1/4 STUD NYLON	15-56-WN #6 RING TERM. 5/16 STUD NYLON	15-38-WN #6 RING TERM. 3/8 STUD NYLON	15-500S-WN #6 RING TERM. 1/2 STUD NYLON					
14-10S-WN #8 RING TERM. 10 STUD NYLON	14-14S-WN #8 RING TERM. 1/4 STUD NYLON	14-56-WN #8 RING TERM. 5/16 STUD NYLON	14-38-WN #8 RING TERM. 3/8 STUD NYLON	14-500S-WN #8 RING TERM. 1/2 STUD NYLON					



ELECTRICAL

### Multilink Connectors Sealed Electrical System

Crimped for Maximum Reliability  
Soldered for Strength & Conductivity  
Sealed for Superior Durability



### MULTILINKS Are the Ultimate Connection WHEN FAILURE IS NOT AN OPTION



#### THE CRIMP CONNECTOR

- Zippered brazed seam for superior crimp performance.
- Window for visual inspection.
- Wirestop prevents over-insertion.
- Serrated inner barrel for extra crimp strength.


#### THE SOLDER

- Flux coating to clean metal surfaces.
- Pre-measured solder to deliver the right amount.
- Low-temp solder alloy for ease of installation.

#### THE HEAT SHRINK TUBING

- Adhesive-lined polyolefin to seal the connection.
- Color-coded with wire gauge imprint for easy size identification.
- Translucent tubing to allow for visual inspection

### The Ultimate Connection

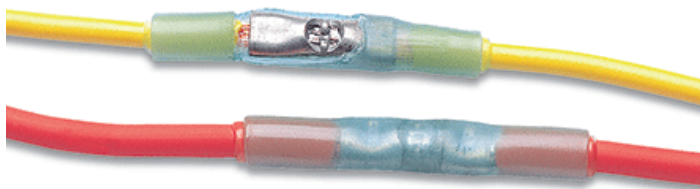

- **High quality, brazed seam crimp connector** provides a secure mechanical connection.
- **Pre-fluxed, low temperature solder** delivers superior current flow and tensile strength.
- **Translucent, adhesive-lined heat shrink tubing** allows for visual inspection and provides a seal against corrosion.
- **Crimped, soldered and sealed connection** meets or exceeds the most stringent OEM standards.

### Easy-to-Install



1. Strip the wire to 3/8".
2. Select a connector (match wire gauge) & insert wire into the barrel.
3. Seat wire and crimp using an insulated crimping tool nest that matches the color or gauge of the connector. If placing a butt connector, repeat steps 1-3 for the other side.
4. Apply heat evenly around the length of tubing (including crimp area) from the center out to the ends until the tubing fully recovers and the adhesive flow & solder flows into the center opening.
5. Remove from heat and let cool for **THE ULTIMATE CONNECTION**.

E  
L  
E  
C  
T  
R  
I  
C  
A  
L



# IBS, INCORPORATED


## Shrink Terminals Q2B

### Multilink Connectors

#### Butt Connectors with Thermal Indicator

Take the Guesswork Out of Soldering!

- **Red thermal indicator** disappears from solder sleeve when solder has flowed
- **Lead-free solder alloy** has greater surface tension, stronger termination
- **“No-clean” flux** on solder sleeve cleans metals & provides quality solder termination

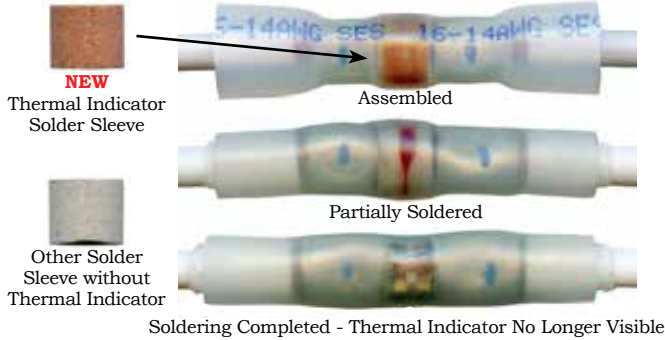

IBS No.	Wire	Color	Qty
BT5520	24-22	Clear	25
BT5518	20-18	Red	50
BT5514	16-14	Blue	50
BT5510	12-10	Yellow	25

#### Butt Connectors

IBS No.	Wire	Color	Qty
B5520	24-22	Clear	25
B5518	20-18	Red	50
B5514	16-14	Blue	50
B5510	12-10	Yellow	25

#### Spade Terminals

IBS No.	Wire	Stud	Color	Qty
140978	20-18	#6	Red	25
132147	20-18	#8	Red	25
125713	20-18	#10	Red	25
140979	16-14	#6	Blue	25
140980	16-14	#8	Blue	25
125714	16-14	#10	Blue	25
140981	12-10	#6	Yellow	25
140982	12-10	#8	Yellow	25
125715	12-10	#10	Yellow	25

#### Step-Butt Connectors



IBS No.	Wire	Color	Qty
B5560	24-22 to 22-18	Pink w / Red Ring	25
B5530	20-18 to 16-14	Blue w / Red Ring	25
B5540	16-14 to 12-10	Yellow w / Blue Ring	25
B5550	8 GA to 12-10	Pink w / Yellow Ring	25

#### Female Quickslides



IBS No.	Wire	Blade	Color	Qty
125717	20-18	.250	Red	25
125719	16-14	.250	Blue	25
125721	12-10	.250	Yellow	25

#### Male Quickslides



IBS No.	Wire	Blade	Color	Qty
125716	20-18	.250	Red	25
125718	16-14	.250	Blue	25
125720	12-10	.250	Yellow	25

#### Ring Terminals



IBS No.	Wire	Stud	Color	Qty
135159	20-18	#6	Red	25
125702	20-18	#8	Red	25
125703	20-18	#10	Red	25
125704	20-18	1/4	Red	25
138835	16-14	#6	Blue	25
125705	16-14	#8	Blue	25
125706	16-14	#10	Blue	25
125707	16-14	1/4	Blue	25
134189	16-14	5/16	Blue	25
125708	16-14	3/8	Blue	25
125709	12-10	#10	Yellow	25
125710	12-10	1/4	Yellow	25
134188	12-10	5/16	Yellow	25
125711	12-10	3/8	Yellow	25
125712	12-10	1/2	Yellow	25

ELECTRICAL



**Multilink Wire Ends  
Assortment with Thermal  
Indicator Butt Connectors**  
IBS No. 859R • 24 Items • 175 Pcs  
Packaged in a locking steel drawer for easy  
storage and organization



IBS, Inc.		Multilink Wire Ends w/ Thermal Indicator Butt Connectors			
Assortment No. 859R					
BTS18 20-18 MULTILINK BUTT CONNECTOR WITH THERMAL INDICATOR	BSS30 20-18 TO 16-14 MULTILINK STEP	BTS14 16-14 MULTILINK BUTT CONNECTOR WITH THERMAL INDICATOR	BSS40 16-14 TO 12-10 MULTILINK STEP	BTS10 12-10 MULTILINK BUTT CONNECTOR WITH THERMAL INDICATOR	BSS50 12-10 TO 8GA MULTILINK STEP
128702 20-18 MULTILINK #8 RING TERM	128713 20-18 MULTILINK #10 SPADE TERM	128705 16-14 MULTILINK #8 RING TERM	128714 16-14 MULTILINK #10 SPADE TERM	128709 12-10 MULTILINK #10 RING TERM	128715 12-10 MULTILINK #10 SPADE TERM
128703 20-18 MULTILINK #10 RING TERM	128716 20-18 MULTILINK .250 MALE	128706 16-14 MULTILINK #10 RING TERM	128718 16-14 MULTILINK .250 MALE	128710 12-10 MULTILINK 1/4 RING TERM	128720 12-10 MULTILINK .250 MALE
128704 20-18 MULTILINK 1/4 RING TERM	128717 20-18 MULTILINK .250 FEMALE	128707 16-14 MULTILINK 1/4 RING TERM	128719 16-14 MULTILINK .250 FEMALE	128711 12-10 MULTILINK 3/8 RING TERM	128721 12-10 MULTILINK .250 FEMALE

**Multilink Wire Ends  
Assortment**  
IBS No. 385R • 24 Items • 175 Pcs  
Packaged in a locking steel drawer for easy  
storage and organization



IBS, Inc.		Multilink Wire Ends			
Assortment No. 385R					
BSS18 20-18 MULTILINK BUTT CONNECTOR	BSS30 20-18 TO 16-14 MULTILINK STEP	BSS14 16-14 MULTILINK BUTT CONNECTOR	BSS40 16-14 TO 12-10 MULTILINK STEP	BSS10 12-10 MULTILINK BUTT CONNECTOR	BSS50 12-10 TO 8GA MULTILINK STEP
128702 20-18 MULTILINK #8 RING TERM	128713 20-18 MULTILINK #10 SPADE TERM	128705 16-14 MULTILINK #8 RING TERM	128714 16-14 MULTILINK #10 SPADE TERM	128709 12-10 MULTILINK #10 RING TERM	128715 12-10 MULTILINK #10 SPADE TERM
128703 20-18 MULTILINK #10 RING TERM	128716 20-18 MULTILINK .250 MALE	128706 16-14 MULTILINK #10 RING TERM	128718 16-14 MULTILINK .250 MALE	128710 12-10 MULTILINK 1/4 RING TERM	128720 12-10 MULTILINK .250 MALE
128704 20-18 MULTILINK 1/4 RING TERM	128717 20-18 MULTILINK .250 FEMALE	128707 16-14 MULTILINK 1/4 RING TERM	128719 16-14 MULTILINK .250 FEMALE	128711 12-10 MULTILINK 3/8 RING TERM	128721 12-10 MULTILINK .250 FEMALE

**Multilink Wire Ends  
Assortment**  
Includes Torch & Butane Refill  
IBS No. 324R • 21 Items • 147 Pcs  
Packaged in a locking steel drawer for easy  
storage and organization



IBS, Inc.		Multilink Wire Ends With Microtorch Butane Torch & Refill Included			
Assortment No. 324R					
BSS18 20-18 MULTILINK BUTT CONNECTOR	BSS30 20-18 TO 16-14 MULTILINK STEP	BSS14 16-14 MULTILINK BUTT CONNECTOR	BSS40 16-14 TO 12-10 MULTILINK STEP	BSS10 12-10 MULTILINK BUTT CONNECTOR	BSS50 12-10 TO 8GA MULTILINK STEP
128702 20-18 MULTILINK #8 RING TERM	128713 20-18 MULTILINK #10 SPADE TERM	128705 16-14 MULTILINK #8 RING TERM	128714 16-14 MULTILINK #10 SPADE TERM	128709 12-10 MULTILINK #10 RING TERM	128715 12-10 MULTILINK #10 SPADE TERM
128703 20-18 MULTILINK #10 RING TERM	128716 20-18 MULTILINK .250 MALE	128706 16-14 MULTILINK #10 RING TERM	128718 16-14 MULTILINK .250 MALE	128710 12-10 MULTILINK 1/4 RING TERM	128720 12-10 MULTILINK .250 MALE
128704 20-18 MULTILINK 1/4 RING TERM	128717 20-18 MULTILINK .250 FEMALE	128707 16-14 MULTILINK 1/4 RING TERM	128719 16-14 MULTILINK .250 FEMALE	128711 12-10 MULTILINK 3/8 RING TERM	128721 12-10 MULTILINK .250 FEMALE
					95007 45 GRAM BUTANE REFILL

**Multilink Wire Ends  
Assortment**  
(without Torch & Butane Refill)  
IBS No. 314R • 19 Items • 145 Pcs  
Packaged in a locking steel drawer for easy  
storage and organization



IBS, Inc.		Multilink Wire Ends			
Assortment No. 314R					
BSS18 20-18 MULTILINK BUTT CONNECTOR	BSS30 20-18 TO 16-14 MULTILINK STEP	BSS14 16-14 MULTILINK BUTT CONNECTOR	BSS40 16-14 TO 12-10 MULTILINK STEP	BSS10 12-10 MULTILINK BUTT CONNECTOR	BSS50 12-10 TO 8GA MULTILINK STEP
128702 20-18 MULTILINK #8 RING TERM	128713 20-18 MULTILINK #10 SPADE TERM	128705 16-14 MULTILINK #8 RING TERM	128714 16-14 MULTILINK #10 SPADE TERM	128709 12-10 MULTILINK #10 RING TERM	128715 12-10 MULTILINK #10 SPADE TERM
128703 20-18 MULTILINK #10 RING TERM	128716 20-18 MULTILINK .250 MALE	128706 16-14 MULTILINK #10 RING TERM	128718 16-14 MULTILINK .250 MALE	128710 12-10 MULTILINK 1/4 RING TERM	128720 12-10 MULTILINK .250 MALE
128704 20-18 MULTILINK 1/4 RING TERM	128717 20-18 MULTILINK .250 FEMALE	128707 16-14 MULTILINK 1/4 RING TERM	128719 16-14 MULTILINK .250 FEMALE	128711 12-10 MULTILINK 3/8 RING TERM	128721 12-10 MULTILINK .250 FEMALE

ELECTRICAL






# IBS, INCORPORATED

## Shrink Terminals Q2B

### Crimp & Seal Terminals

Crimp & Seal terminals are all-weather, crimped and heat-sealed connectors suitable for every standard electrical connection. These connectors greatly upgrade the electrical systems of automobiles, boats and machinery by incorporating an adhesive-lined, heat-shrinkable tubing plus the finest metal connectors available. The result is a tough, durable and corrosion-resistant connection.

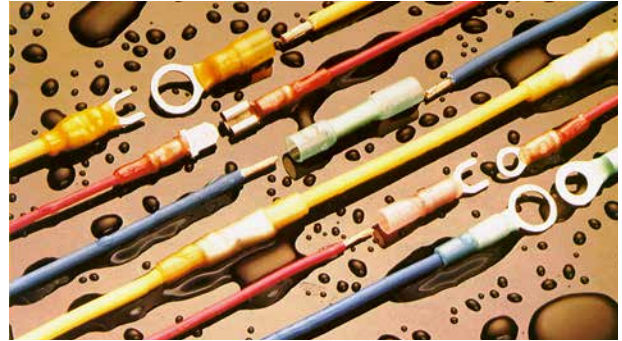

E  
L  
E  
C  
T  
R  
I  
C  
A  
L

**Clear Tubing**  
Allows Visual Inspection

**Heavy Duty Tubing Provides**  
Additional Strain Relief

**Long Copper Barrel**  
for Maximum Crimping & Conductivity

**Inner Wall Melts to**  
Create an Environmental Seal When Heated

**Standard Color Coding**  
Indicates Wire Sizes for Easy Identification



### Design Features

- **Heavy duty, polyolefin tubing** provides maximum strain relief eliminating failure due to flex.
- **Meltable integral inner-wall lines the tube.** This special adhesive fills any existing voids and creates an environmental seal which repels moisture, and reduces vibration.
- **Electro-tin plated copper terminals** provide maximum conductivity insuring full power along with high corrosion resistance for long life.
- **Heat-shrinkable tubing is pre-shrunk to the terminal** eliminating a time consuming step and insuring that the wire will be sealed off from moisture.
- **Industry standard color coded sleeve** for quick identification saves time and eliminates errors.

### Installation



Crimp & Seal terminals are easily crimped with a conventional tool for insulated connections. A hot air gun, or other heat source should be applied to the splice until the tubing recovers and the adhesive flows.

### PRODUCT CHARACTERISTICS

#### Electrical Properties

Temperature Rating: 67° to 255°F  
 Dielectric Strength: 7.5KV  
 Voltage Drop: Less than equal length of wire  
 Insulation Resistance: 10<sup>6</sup> Megohms

#### Insulation Properties

Initial Properties Tensile Strength: 7000 psi  
 Ultimate Elongation: 200%  
 After Heat Aging Tensile Strength: 700 psi  
 (168 hr: 315°F/158°C) Ultimate Elongation: 200%  
 Brittleness Impact No cracking (4 hr. -94°F/-70°C)  
 Cut-through Resistance 70 lbs.  
 Abrasion Resistance 700 cycles



### Crimp & Seal Terminals

#### Butt Connectors



IBS No.	Wire	Color	Qty
B5100	24-22	Clear	50
B5110	20-18	Red	50
B5210	16-14	Blue	50
B5310	12-10	Yellow	25
B5108	8 GA	Pink	25

#### Step Butt Connectors



IBS No.	Wire	Color	Qty
B5610	20-18 to 16-14	Blue w / Red Stripe	25
B5620	16-14 to 12-10	Yellow w / Blue Stripe	25
B5630	12-10 to 8 GA	Red w / Yellow Stripe	25

#### Spade Terminals



IBS No.	Wire	Stud	Color	Qty
B5118	20-18	#10	Red	25
B5228	16-14	#10	Blue	25
B5331	12-10	#10	Yellow	25

#### Snap Plugs



##### MALE SNAP PLUGS

IBS No.	Wire	Blade	Color	Qty
B5165	20-18	.156	Red	25
B5265	16-14	.156	Blue	25



##### FEMALE SNAP PLUGS

IBS No.	Wire	Plug	Color	Qty
B5175	20-18	.156	Red	25
B5275	16-14	.156	Blue	25

#### Ring Terminals



IBS No.	Wire	Stud	Color	Qty
B5112	20-18	#6	Red	25
B5113	20-18	#8	Red	25
B5114	20-18	#10	Red	25
B5115	20-18	1/4	Red	25
B5116	20-18	5/16	Red	25
B5117	20-18	3/8	Red	25
B5222	16-14	#6	Blue	25
B5223	16-14	#8	Blue	25
B5224	16-14	#10	Blue	25
B5225	16-14	1/4	Blue	25
B5226	16-14	5/16	Blue	25
B5227	16-14	3/8	Blue	25
B5323	12-10	#8	Yellow	25
B5324	12-10	#10	Yellow	25
B5325	12-10	1/4	Yellow	25
B5326	12-10	5/16	Yellow	25
B5327	12-10	3/8	Yellow	25
B5328	12-10	1/2	Yellow	25

#### Quick Slides



##### MALE QUICK SLIDES - INSULATED

IBS No.	Wire	Blade	Color	Qty
B5155	20-18	.250	Red	25
B5235	16-14	.187	Blue	25
B5255	16-14	.250	Blue	25
B5355	12-10	.250	Yellow	25



##### FEMALE QUICK SLIDES - FULLY INSULATED

IBS No.	Wire	Blade	Color	Qty
B5145	20-18	.250	Red	25
B5230	16-14	.187	Blue	25
B5245	16-14	.250	Blue	25
B5345	12-10	.250	Yellow	25

ELECTRICAL



# IBS, INCORPORATED

## Shrink Terminals Q2B

### Crimp & Seal Long Neck Terminals

The Ideal Terminal for Heat Shrink Connectors

Standard sealed terminals often end up with a less than optimum seal because there just isn't enough room between the neck and ring to accommodate the shrink tubing and provide a perfect seal to keep out corrosion. Or, the shrink tubing impedes on the stud hole and makes mounting the ring terminal difficult.

**Long Neck = Superior Contact      Regular Neck = Inferior Contact**



Long Neck Crimp & Seal Terminals are re-designed to solve both those issues and features the added benefit of being the ideal terminal for stacking applications.

- Longer neck provides more space for shrink tubing which means a better seal, giving a longer lasting terminal that won't corrode and fail over time.
- Longer neck also means more space for the stud hole to make mounting and attaching the ring terminals easier and giving a much better connection.
- Long neck design also makes for better terminal in stacking applications also providing a better connection and less chance of failure.



IBS No.	Wire	Stud	Color	Qty
136025	22-18	#6	Red	25
136026	22-18	#8	Red	25
136027	22-18	#10	Red	25
136028	14-16	#6	Blue	25
136029	14-16	#8	Blue	25
136030	14-16	#10	Blue	25
136031	14-16	1/4	Blue	25
136032	14-16	5/16	Blue	25
136033	14-16	3/8	Blue	25
136034	12-10	#8	Yellow	25
136035	12-10	#10	Yellow	25
136036	12-10	1/4	Yellow	25
136037	12-10	5/16	Yellow	25
136038	12-10	3/8	Yellow	25

### Long Neck Crimp & Seal Terminals Assortment

**IBS No. 790R • 14 Items • 140 Pcs**  
Packaged in a locking steel drawer for easy storage and organization



IBS, Inc. Crimp & Seal Long Neck Terminals			
Assortment No. 790R			
136025 22-18 CRIMP & SEAL #6 LONG NECK RING	136029 16-14 CRIMP & SEAL #8 LONG NECK RING	136033 16-14 CRIMP & SEAL 3/8 LONG NECK RING	136037 12-10 CRIMP & SEAL 5/16 LONG NECK RING
136026 22-18 CRIMP & SEAL #8 LONG NECK RING	136030 16-14 CRIMP & SEAL #10 LONG NECK RING	136034 12-10 CRIMP & SEAL #8 LONG NECK RING	136038 12-10 CRIMP & SEAL 3/8 LONG NECK RING
136027 22-18 CRIMP & SEAL #10 LONG NECK RING	136031 16-14 CRIMP & SEAL 1/4 LONG NECK RING	136035 12-10 CRIMP & SEAL #10 LONG NECK RING	
136028 16-14 CRIMP & SEAL #6 LONG NECK RING	136032 16-14 CRIMP & SEAL 5/16 LONG NECK RING	136036 12-10 CRIMP & SEAL 1/4 LONG NECK RING	

### Crimp & Seal Terminals with Long Neck Ring Terminals

**IBS No. 791R • 24 Items • 240 Pcs**  
Packaged in a locking steel drawer for easy storage and organization



IBS, Inc. Crimp & Seal Wire Ends w/ Long Neck Ring Terminals					
Assortment No. 791R					
B5110 20-18 CRIMP & SEAL BUTT CONNECTOR	B5118 20-18 #10 CRIMP & SEAL SPADE TERM	136028 16-14 #6 CRIMP & SEAL LONG NECK RING	136033 16-14 3/8 CRIMP & SEAL LONG NECK RING	B5210 12-10 CRIMP & SEAL BUTT CONNECTOR	136038 12-10 3/8 CRIMP & SEAL LONG NECK RING
136025 22-18 #6 CRIMP & SEAL LONG NECK RING	B5155 20-18 CRIMP & SEAL .250 MALE CONN	136029 16-14 #8 CRIMP & SEAL LONG NECK RING	B5225 16-14 CRIMP & SEAL #10 SPADE TERM	136034 12-10 #8 CRIMP & SEAL LONG NECK RING	B5311 12-10 CRIMP & SEAL #10 SPADE TERM
136026 22-18 #8 CRIMP & SEAL LONG NECK RING	B5145 20-18 CRIMP & SEAL .250 FEMALE CONN	136030 16-14 #10 CRIMP & SEAL LONG NECK RING	B5255 16-14 CRIMP & SEAL .250 MALE CONN	136035 12-10 #10 CRIMP & SEAL LONG NECK RING	B5355 12-10 CRIMP & SEAL .250 MALE CONN
136027 22-18 #10 CRIMP & SEAL LONG NECK RING	B5210 16-14 CRIMP & SEAL BUTT CONNECTOR	136031 16-14 1/4 CRIMP & SEAL LONG NECK RING	B5245 16-14 CRIMP & SEAL .250 FEMALE CONN	136036 12-10 1/4 CRIMP & SEAL LONG NECK RING	B5345 12-10 CRIMP & SEAL .250 FEMALE CONN

ELECTRICAL



### Crimp & Seal Terminals Assortment

Includes Torch & Butane Refill  
**IBS No. 109R • 21 Items • 315 Pcs**  
 Packaged in a locking steel drawer for easy storage and organization



IBS, Inc.					Crimp & Seal Terminals w/ Torch & Butane Refill	
IBS, Inc. 10000 W. 10th Street, Suite 100, Overland Park, KS 66204-4400 www.ibsinc.com 800-878-1808					Assortment No. 109R	
			B5223 16-14 CRIMP & SEAL #8 RING TERM	B5224 16-14 CRIMP & SEAL #10 RING TERM	125738 + 95007 MICROTORCH BUTANE TORCH + REFILL	
B5225 16-14 CRIMP & SEAL 1/4 RING TERM	B5228 16-14 CRIMP & SEAL #10 SPADE TERM	B5245 16-14 CRIMP & SEAL .250 FEMALE CONN	B5255 16-14 CRIMP & SEAL .250 MALE CONN	B5265 16-14 CRIMP & SEAL .156 MALE BULLET		
B5275 16-14 CRIMP & SEAL .156 FEMALE BULLET	B5324 12-10 CRIMP & SEAL #10 RING TERM	B5325 12-10 CRIMP & SEAL 1/4 RING TERM	B5327 12-10 CRIMP & SEAL 3/8 RING TERM	B5345 12-10 CRIMP & SEAL .250 FEMALE CONN	B280 22-18 SOLDER&SEAL SHRINK TUBE	
B5355 12-10 CRIMP & SEAL .250 MALE CONN	B5110 20-18 CRIMP & SEAL BUTT CONNECTOR	B5210 16-14 CRIMP & SEAL BUTT CONNECTOR	B5310 12-10 CRIMP & SEAL BUTT CONNECTOR	B5100 22-24 CRIMP & SEAL BUTT CONNECTOR	B281 16-14 SOLDER&SEAL SHRINK TUBE	
					B282 12-10 SOLDER&SEAL SHRINK TUBE	

### Crimp & Seal Terminals Assortment

**IBS No. 316R • 19 Items • 348 Pcs**  
 Packaged in a locking steel drawer for easy storage and organization



IBS, Inc.					Crimp-N-Seal Terminals	
IBS, Inc. 10000 W. 10th Street, Suite 100, Overland Park, KS 66204-4400 www.ibsinc.com 800-878-1808					Assortment No. 316R	
			B5223 16-14 CRIMP & SEAL #8 RING TERM	B5224 16-14 CRIMP & SEAL #10 RING TERM	B280 22-18 SOLDER&SEAL SHRINK TUBE	
B5225 16-14 CRIMP & SEAL 1/4 RING TERM	B5228 16-14 CRIMP & SEAL #10 SPADE TERM	B5245 16-14 CRIMP & SEAL .250 FEMALE CONN	B5255 16-14 CRIMP & SEAL .250 MALE CONN	B5265 16-14 CRIMP & SEAL .156 MALE BULLET	B281 16-14 SOLDER&SEAL SHRINK TUBE	
B5275 16-14 CRIMP & SEAL .156 FEMALE BULLET	B5324 12-10 CRIMP & SEAL #10 RING TERM	B5325 12-10 CRIMP & SEAL 1/4 RING TERM	B5327 12-10 CRIMP & SEAL 3/8 RING TERM	B5345 12-10 CRIMP & SEAL .250 FEMALE CONN	B282 12-10 SOLDER&SEAL SHRINK TUBE	
B5355 12-10 CRIMP & SEAL .250 MALE CONN	B5110 20-18 CRIMP & SEAL BUTT CONNECTOR	B5210 16-14 CRIMP & SEAL BUTT CONNECTOR	B5310 12-10 CRIMP & SEAL BUTT CONNECTOR	B5100 22-24 CRIMP & SEAL BUTT CONNECTOR		

### Crimp & Seal Terminals Assortment

**IBS No. 386R • 24 Items • 240 Pcs**  
 Packaged in a locking steel drawer for easy storage and organization



IBS, Inc.						Crimp & Seal Wire Ends	
IBS, Inc. 10000 W. 10th Street, Suite 100, Overland Park, KS 66204-4400 www.ibsinc.com 800-878-1808						Assortment No. 386R	
B5110 20-18 CRIMP & SEAL BUTT CONNECTOR	B5115 20-18 CRIMP & SEAL 1/4 RING TERM	B5210 16-14 CRIMP & SEAL BUTT CONNECTOR	B5227 16-14 CRIMP & SEAL 3/8 RING TERM	B5310 12-10 CRIMP & SEAL BUTT CONNECTOR	B5327 12-10 CRIMP & SEAL 3/8 RING TERM		
B5112 20-18 CRIMP & SEAL #6 RING TERM	B5118 20-18 CRIMP & SEAL SPADE TERM	B5223 16-14 CRIMP & SEAL #8 RING TERM	B5228 16-14 CRIMP & SEAL #10 SPADE TERM	B5323 12-10 CRIMP & SEAL #8 RING TERM	B5331 12-10 CRIMP & SEAL #10 SPADE TERM		
B5113 20-18 CRIMP & SEAL #8 RING TERM	B5155 20-18 CRIMP & SEAL .250 MALE CONN	B5224 16-14 CRIMP & SEAL #10 RING TERM	B5255 16-14 CRIMP & SEAL .250 MALE CONN	B5324 12-10 CRIMP & SEAL #10 RING TERM	B5355 12-10 CRIMP & SEAL .250 FEMALE CONN		
B5114 20-18 CRIMP & SEAL #10 RING TERM	B5145 20-18 CRIMP & SEAL .250 FEMALE CONN	B5225 16-14 CRIMP & SEAL 1/4 RING TERM	B5245 16-14 CRIMP & SEAL .250 FEMALE CONN	B5325 12-10 CRIMP & SEAL 1/4 RING TERM	B5345 12-10 CRIMP & SEAL .250 FEMALE CONN		

ELECTRICAL



# IBS, INCORPORATED

## Shrink Terminals Q2B


ELECTRICAL

### HydraLink Connectors

#### Sealed Connectors for Multiple Wires

### HydraLink Inline Butt Connectors


- Connects 1 wire to 2 wires.
- Provides a superior alternative to unsealed quick taps.
- Crimped for positive connectivity.
- Sealed for durability & corrosion resistance.

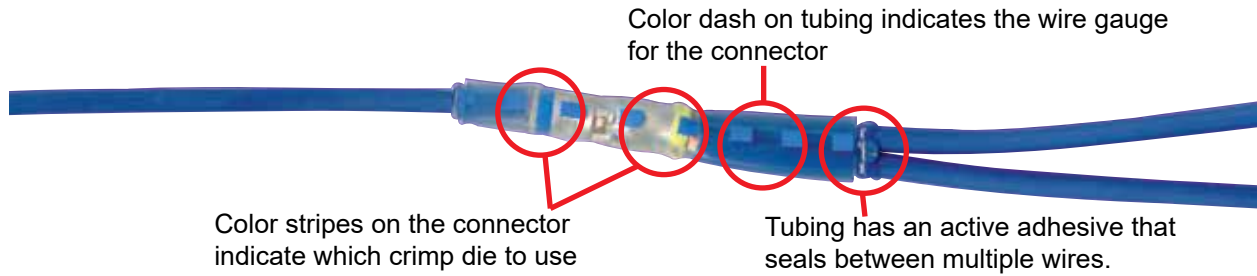

#### HYDRALINK INLINE BUTT CONNECTORS

	IBS No.	Wire GA	Tubing Color	Color Stripe on Connector	Wire	Crimp Die (Insulated)	Qty
	<b>B5716</b>	20-18 AWG	Clear / Red Dashes	Side 1: Red Side 2: Blue	One: 20-18 Two: 20-18	Red (20-18) Blue (16-14)	15
	<b>B5714</b>	16-14 AWG	Clear / Blue Dashes	Side 1: Blue Side 2: Yellow	One: 16-14 Two: 16-14	Blue (16-14) Yellow (12-10)	15
	<b>B5710</b>	12-10 AWG	Clear / Yellow Dashes	Side 1: Yellow Side 2: Red	One: 12-10 Two: 12-10	Yellow (12-10) Red (8 GA)	15

### HydraLink Closed End Connectors

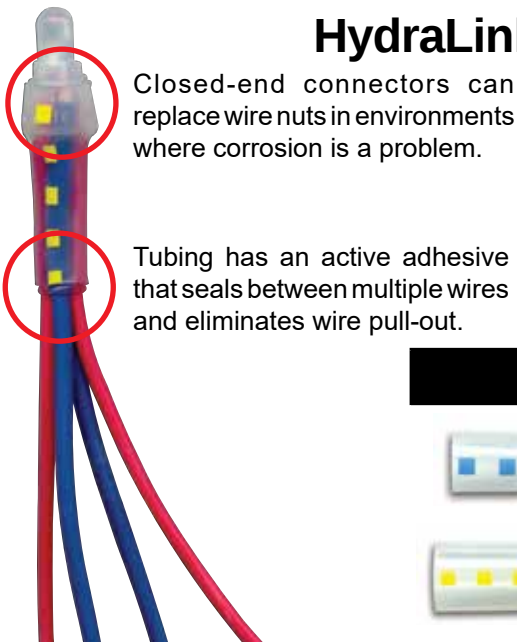

- Connects up to 4 wires.
- Provides a superior alternative to wire nuts.
- Crimped for positive connectivity.
- Adhesive tubing eliminates pull-out.
- Sealed for durability & corrosion resistance.

#### HYDRALINK CLOSED END CONNECTORS

	IBS No.	Wire	Tubing Color	Qty
	<b>B5814</b>	22-14 AWG	Clear / Blue Dashes	15
	<b>B5810</b>	18-10 AWG	Clear / Yellow Dashes	15

# IBS, INCORPORATED

## Assortments Z02








































### Sealed Wire Connectors II Assortment

IBS No. 761R • 18 Items • 160 Pcs

Packaged in a locking steel drawer for easy storage and organization



 <b>IBS, Inc.</b> <small>SPECIALTY PRODUCTS FOR MAINTENANCE &amp; REPAIR  INDUSTRIALBOLT.COM © © © 800-678-1906</small>		Sealed Wire Connectors II			Assortment No. 761R
<b>B5560</b> 26-24 TO 22-18 MULTILINK STEP BUTT CONNECTOR  	<b>B5610</b> 20-18 X 16-14 CRIMP & SEAL STEP BUTT CON  	<b>B5716</b> 20-18 HYDRALINK IN LINE BUTT CONNECTOR  	<b>B5916</b> 22-18 OPTISEAL BUTT CONNECTOR  	<b>B5110</b> 20-18 CRIMP & SEAL BUTT CONNECTOR  	
<b>B5530</b> 20-18 TO 16-14 MULTILINK STEP BUTT CONN  	<b>B5620</b> 16-14 12-10 CRIMP & SEAL STEP BUTT CON  	<b>B5714</b> 16-14 HYDRALINK IN LINE BUTT CONNECTOR  	<b>B5914</b> 16-14 OPTISEAL BUTT CONNECTOR  	<b>B5210</b> 16-14 CRIMP & SEAL BUTT CONNECTOR  	
<b>B5540</b> 16-14 TO 12-10 MULTILINK STEP BUTT CONN  	<b>B5630</b> 12-10 X 8GA CRIMP & SEAL STEP BUTT CONN  	<b>B5710</b> 12-10 HYDRALINK IN LINE BUTT CONNECTOR  	<b>B5910</b> 12-10 OPTISEAL BUTT CONNECTOR  	<b>B5310</b> 12-10 CRIMP & SEAL BUTT CONNECTOR  	
<b>B5550</b> 12-10 TO 8GA MULTILINK STEP BUTT CONN  	<b>B5814</b> 22-14 HYDRALINK CLOSED END CONNECTOR  	<b>B5810</b> 18-10 HYDRALINK CLOSED END CONNECTOR  			

ELECTRICAL





# IBS, INCORPORATED

## Shrink Terminals Q2B

### Optiseal Terminals

#### For a Clear and OPTimal View of the Connection

OptiSeal connectors are designed to provide optimal visual assurance of a sealed crimp connection and eliminate mis-crimps. Standard connectors do not allow the installer to see the wire, which can result in the following problems:



- 1) Wire stripped too short — which can result in crimping the end of the wire (poor termination).
- 2) Wire is not fully seated to the connector, which can result in a poor termination.

#### COLOR CODED TERMINALS

- Ring Terminals have a 45° barrel that assures the wire is seated properly and wire is being crimped to the terminal for optimal connection, saving on timely repairs and failure.
- Longer neck provides more space for shrink tubing which means a better seal, for a longer lasting terminal that won't corrode and fail over time.
- Longer neck also means more space for the stud hole to make mounting and attaching ring terminals easier which provides a much better connection — meaning an optimum electrical connection with no power loss and less chance for corrosion.
- The long neck design also makes for a better terminal in stacking applications also providing a better connection and less chance of failure.
- Color-coded stripes also indicate/guide where to position crimp nest to install properly for the correct connection reducing failure and downtime.
- Brazed seam barrel ensures superior crimp performance for optimum connection saving on timely repairs and failure.
- Serrations in the crimp barrel provide strong mechanical termination for stronger hold reducing the chance of failure or pullout.

### Optiseal Ring Terminals



IBS No.	Description	Qty
136040	12-10 OptiSeal Ring #6	25
136001	12-10 Optiseal Ring #8	25
136002	12-10 Optiseal Ring #10	25
136003	12-10 Optiseal Ring 1/4	25
136004	12-10 Optiseal Ring 5/16	25
136005	12-10 Optiseal Ring 3/8	25
136041	12-10 Optiseal Ring 1/2	25
136006	16-14 Optiseal Ring #6	25
136007	16-14 Optiseal Ring #8	25
136008	16-14 Optiseal Ring #10	25
136009	16-14 Optiseal Ring 1/4	25
136010	16-14 Optiseal Ring 5/16	25
136011	16-14 Optiseal Ring 3/8	25
136012	22-18 Optiseal Ring #6	25
136013	22-18 Optiseal Ring #8	25
136014	22-18 Optiseal Ring #10	25
136042	22-18 Optiseal Ring 1/4	25
136043	22-18 Optiseal Ring 5/16	25
136044	22-18 Optiseal Ring 3/8	25

### Optiseal Step Butt Connectors



IBS No.	Wire	Code Color	Qty
136015	12-10 to 8GA	Yellow to Red	25
136016	16-14 to 12-10	Blue to Yellow	25
136017	22-18 to 16-14	Red to Blue	25
136018	22-24 to 22-18	White to Red	25

### Optiseal Butt Connectors



IBS No.	Wire	Code Color	Qty
B5916	22-18	Red	25
B5914	16-14	Blue	25
B5910	12-10	Yellow	25

E  
L  
E  
C  
T  
R  
I  
C  
A  
L

### Optiseal Male & Female Connectors

STANDARD LENGTH



IBS No.	Description	Qty
136019	12-10 OptiSeal .250 Female Conn	25
136020	12-10 OptiSeal .250 Male Conn	25
136021	16-14 OptiSeal .250 Female Conn	25
136039	16-14 OptiSeal .250 Male Conn	25
136023	22-18 OptiSeal .250 Female Conn	25
136024	22-18 OptiSeal .250 Male Conn	25

### Optiseal Male & Female Connectors

PARTIALLY INSULATED



IBS No.	Description	Qty
136051	12-10 .250 Female Connector Partially Insulated	25
136053	12-10 .250 Male Connector Partially Insulated	25
136054	16-14 .250 Female Connector Partially Insulated	25
136056	16-14 .250 Male Connector Partially Insulated	25
136057	22-18 .250 Female Connector Partially Insulated	25
136059	22-18 .250 Male Connector Partially Insulated	25

### Optiseal Female Connector

FULLY INSULATED



IBS No.	Description	Qty
136052	12-10 .250 Female Long Neck Connector — Fully Insulated	25
136055	16-14 .250 Female Long Neck Connector — Fully Insulated	25
136058	22-18 .250 Female Long Neck Connector — Fully Insulated	25

### Optiseal Spade Terminals



IBS No.	Description	Qty
136045	12-10 #8-#10 Stud Spade	25
136046	12-10 1/4 Stud Spade	25
136047	16-14 #6 Stud Spade	25
136048	16-14 #8-#10 Stud Spade	25
136049	22-18 #6 Stud Spade	25
136050	22-18 #8-#10 Stud Spade	25

### Optiseal Male Bullet Plug Connectors



IBS No.	Description	Qty
136063	12-10 OptiSeal Male Bullet .180 Plug	25
136061	12-10 OptiSeal Male Bullet .157 Plug	25
136067	16-14 OptiSeal Male Bullet .180 Plug	25
136065	16-14 OptiSeal Male Bullet .157 Plug	25
136071	22-18 OptiSeal Male Bullet .180 Plug	25
136069	22-18 OptiSeal Male Bullet .157 Plug	25

### Optiseal Female Bullet Receptacle Connectors



IBS No.	Description	Qty
136062	12-10 OptiSeal Female Bullet .180 Recep	25
136060	12-10 OptiSeal Female Bullet .157 Recep	25
136066	16-14 OptiSeal Female Bullet .180 Recep	25
136064	16-14 OptiSeal Female Bullet .157 Recep	25
136070	22-18 OptiSeal Female Bullet .180 Rec	25
136068	22-18 OptiSeal Female Bullet .157 Rec	25



# IBS, INCORPORATED

## Assortments Z02

### OptiSeal Terminals

IBS No. 793R • 24 Items • 220 Pieces

Packaged in a locking steel drawer for easy storage and organization



ELECTRICAL



### Optiseal Terminals

Assortment No. 793R

<b>B5916</b> 22-18 OPTISEAL BUTT CONNECTOR 	<b>136017</b> 22-18 TO 16-14 OPTISEAL STEP BUTT 	<b>B5914</b> 16-14 OPTISEAL BUTT CONNECTOR 	<b>136016</b> 16-14 TO 12-10 OPTISEAL STEP BUTT 	<b>B5910</b> 12-10 OPTISEAL BUTT CONNECTOR 	<b>136015</b> 12-10 TO 8GA OPTISEAL STEP BUTT CONNECTOR 
<b>136018</b> 24-22 TO 22-18 OPTISEAL STEP BUTT 	<b>136014</b> 22-18 #10 OPTISEAL RING TERMINAL 	<b>136007</b> 16-14 #8 OPTISEAL RING TERMINAL 	<b>136011</b> 16-14 3/8 OPTISEAL RING TERMINAL 	<b>136001</b> 12-10 #8 OPTISEAL RING TERMINAL 	<b>136005</b> 12-10 3/8 OPTISEAL RING TERMINAL 
<b>136012</b> 22-18 #6 OPTISEAL RING TERMINAL 	<b>136023</b> 22-18 .250 FEMALE OPTISEAL CONNECTOR 	<b>136008</b> 16-14 #10 OPTISEAL RING TERMINAL 	<b>136021</b> 16-14 .250 FEMALE OPTISEAL CONNECTOR 	<b>136002</b> 12-10 #10 OPTISEAL RING TERMINAL 	<b>136019</b> 12-10 .250 FEMALE OPTISEAL CONNECTOR 
<b>136013</b> 22-18 #8 OPTISEAL RING TERMINAL 	<b>136024</b> 22-18 .250 MALE OPTISEAL CONNECTOR 	<b>136009</b> 16-14 1/4 OPTISEAL RING TERMINAL 	<b>136039</b> 16-14 .250 MALE OPTISEAL CONNECTOR 	<b>136003</b> 12-10 1/4 OPTISEAL RING TERMINAL 	<b>136020</b> 12-10 .250 MALE OPTISEAL CONNECTOR 

### Optiseal Terminals & Heat Shrink Kits (Z08)

728R-1 OptiSeal Shrink Tube Kit with Ratcheting Crimper

728R OptiSeal Conn & Shrink Tube Kit Only

Packaged in a locking plastic travel tray for easy storage and organization



#### OPTISEAL KIT CONTENTS

IBS No.	Description	Qty
B5910	12-10 OPTISEAL Butt Connector	25
B5914	16-14 OPTISEAL Butt Connector	25
B5916	22-18 OPTISEAL Butt Connector	25
B5920	12-10 OPTISEAL Shrink Tube	5
B5924	16-14 OPTISEAL Shrink Tube	10
B5926	22-18 OPTISEAL Shrink Tube	10
Included with 728R-1		
B0050	Ratcheting Crimp Tool	1

### Solder & Seal Terminals

**While Supplies Last**

Solder & Seal terminals stand out from other connectors by providing an electrically and environmentally secure connection in a simple, one-step process. The soldering ensures superior resistance, voltage drop, and tensile strength, exceeding current performance standards. The heat-shrinkable tubing with adhesive lining offers a complete seal, preventing corrosion and reducing vibration.

#### Design Features

- **Fluxed solder ring** melts and flows when heated to strengthen the connection, maximize current flow and minimize resistance.
- **Tough, multiple wall tubing** shrinks when heated and delivers above average vibration and tensile strength (700 psi vis 40 psi for a standard nylon splice) which reduces failure due to pull-out under stress.
- **Translucent, adhesive-lined** sleeve melts when heated to create an environmentally sealed connection which reduces failure due to moisture, corrosion, and vibration.
- **Industry standard color-coded sleeve** for quick identification saves time and eliminates costly errors.
- **No expensive crimp tools required** - means perfect connections anywhere.

Clear Tubing Allows Visual Inspection

Standard Color Coding Indicates Wire Sizes for Easy Identification

Inner Wall Melts to create an Environmental Seal when Heated



Heavy Duty Tubing Provides Additional Strain Relief

Solder Link Provides Maximum Current Flow

#### PRODUCT CHARACTERISTICS

Temperature Rating: -65° to 275°F  
 Insulation Resistance: 1014 Megohms  
 Dielectric Strength: 15kV

#### Military Specifications

Voltage Drop: Less than equal length of wire  
 Tubing: MIL-I-25053/4 Class 1, AMS-3634  
 Solder: QQ5571E, MIL-S-14256

#### Ring Terminals



IBS No.	Wire	Stud	Color	Qty
B114-10	16-14	#10	Blue	25
B114-14	16-14	1/4	Blue	25
B114-38	16-14	3/8	Blue	25
B110-14	12-10	1/4	Yellow	25
B110-38	12-10	3/8	Yellow	25
B110-12	12-10	1/2	Yellow	25

#### Spade Terminals



IBS No.	Wire	Stud	Color	Qty
B216-10	20-18	#10	Red	25
B214-10	16-14	#10	Blue	25
B210-10	12-10	#10	Yellow	25

### Cool Seal Terminals (Q3C)

**While Supplies Last**

Cool Seal terminals are the most innovative and cost-effective sealed electrical connector to hit the market in 25 years. A heat-less, solder-less terminal, it utilizes revolutionary technology that installs in a fraction of the time of comparable heat seal connectors.



#### BUTT CONNECTORS

IBS No.	Wire	Color	Qty
62-CS	16-14	Blue	50
63-CS	12-10	Yellow	25

- Seals out moisture causing corrosion — assuring a better connection and longer life.
- A heat-less / solder-less connection — for ease of use and safety because no flame is required.
- Patented anaerobic technology — adhesive activated when wire is inserted for maximum strength.
- Simply strip and crimp for a fast, economical connection.
- No heat tools required, making it a faster, safer connection.
- Nylon insulation for superior protection and longer life.
- 99.9% ETP copper terminal for maximum connectivity.





# IBS, INCORPORATED

## Quick Connectors Q3E

### 3M Performance Plus Wire Connectors

- **Unique Design:** Accommodates multiple wire combinations.
- **Rounded Wings:** Makes connectors easier to grip.
- **Flexible Skirt:** Covers overstrips for additional safety.
- **3 Connectors in Family:** Covers entire 600V range.


#### FASTER AND EASIER TO USE

##### Grips Quicker, Pulls on Faster

The unique spring design grips quickly, turns on fast and expands to accept a wide range of wire sizes. The unique spring design also bites quicker for secure connections every time.

##### Covers a Wider Range

The larger throat design and extended skirt allow just three connectors to cover the entire 600V range.

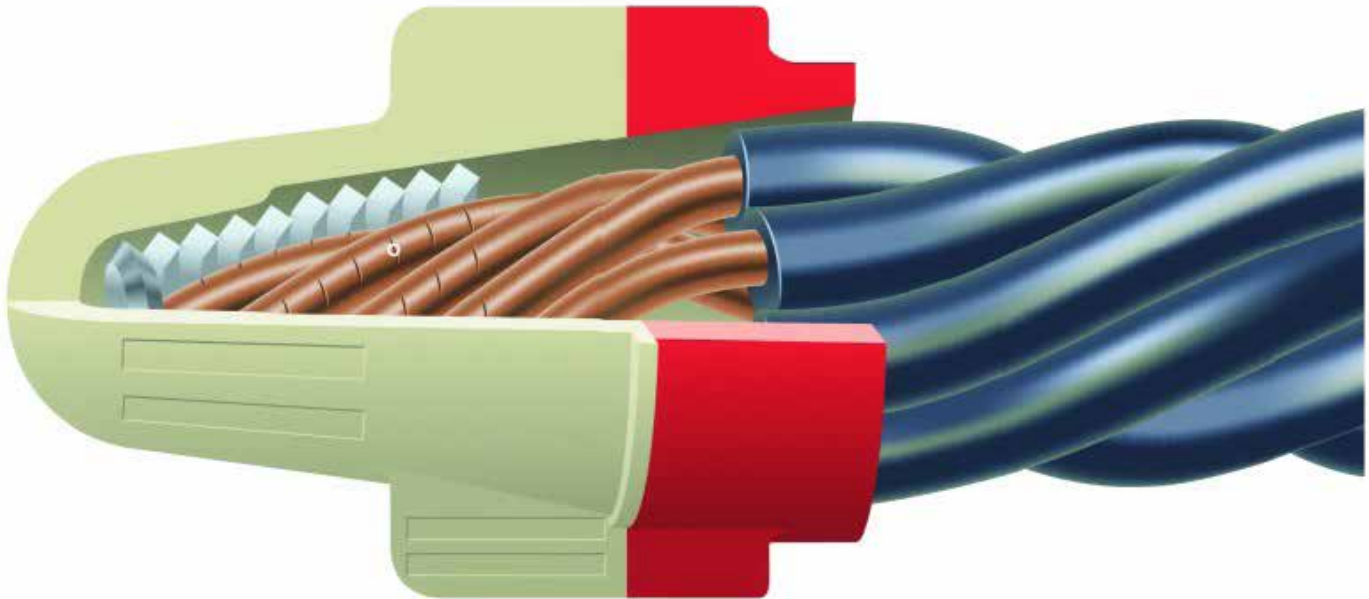


##### New Design for Easier Installation

A newly modified internal design makes installation smooth, fast and easy on the hands.

##### Flexible Protection

Long, flexible skirt covers overstrips and protects conductors, but readily bends and conforms to take up less room.

#### 3M PERFORMANCE PLUS WIRE CONNECTORS

	IBS No.	Color	Wire Combination Range		Voltage Rating	Qty
			MIN	MAX		
	973	Orange Blue	2 # 22	2 # 12	600V UL Listed	50
	974	Red Yellow	2 # 18	2 # 8		50
	975	Blue Gray	4 # 14	2 # 6		25



# IBS, INCORPORATED

## Quick Connectors Q3E



### Wall Nuts

#### Pushwire Connectors for Solid and Stranded Copper Wire

Use with Multiple Wire Gauges



#### See the Safety:

- Clear housing allows visual confirmation of connection.
- Test port for easy continuity testing.

#### Fast, Easy Installation:

- No more twisting and taping required.
- Strip the wire, insert the conductor, and you're done!

#### Safe:

- Each wire is held individually, eliminating loose connections.
- Touch-proof and rated to 105°C.
- UL listed/CSA certified for 600 volts (1000 volts for fixtures and signs) and current rated to the largest conductor used.

#### Save Time:

- Wall Nuts™ provide up to 50% time savings on installation.
- Secure connections reduce expensive troubleshooting and warranty work.

	IBS No.	Push-In Cond	Strand Copper	Solid Copper	Qty
	773-162	2	12-16 AWG stranded (<19 strands) Strip Length =0.47in	12-18 AWG	100
	773-164	4			100
	773-166	6			100
	773-168	8			50
	773-173	3	10-14 AWG Strip Length =0.47in	10-14 AWG	50

### Lever Nut

#### Pushwire Connector for Solid and Stranded Copper Wire With Locking Lever

Use with Multiple Wire Gauges



#### Fast, Easy Installation:

- Spring pressure connection technology for a secure and locked connection.
- Built in test port for easy continuity testing.
- No more twisting and taping required.
- Strip the wire, insert the conductor, snap the lever down and you're done!

#### Safe:

- Each wire is held individually, eliminating loose connections.
- Touch-proof and rated to 105°C.
- UL listed/CSA certified for 600 volts (1000 volts for fixtures and signs).

#### Save Time:

- Like the Wall Nuts™, Lever Nut provides up to 50% time savings on installation.
- Secure connections reduce expensive troubleshooting and warranty work.

	IBS No.	Push-In Cond	Strand Copper	Solid Copper	Qty
	222-412	2	12-28 AWG Strip Length =0.47in	12-28 AWG Strip Length =0.47in	50
	222-413	3	12-28 AWG Strip Length =0.47in	12-28 AWG Strip Length =0.47in	50
	222-415	5	12-28 AWG Strip Length =0.47in	12-28 AWG Strip Length =0.47in	40

ELECTRICAL




# IBS, INCORPORATED

## Quick Connectors Q3E

### Lever-Nuts

#### Compact Splicing Connectors for All Wire Types.

Smaller and More User Friendly



#### See the Safety:

- Clear housing allows visual confirmation of connection.
- Test port for easy continuity testing.

#### Fast, Easy Installation:





- Connects solid, stranded, and fine-stranded conductors from 24-12 AWG, Inline accepts 20-12 AWG
- Lift the lever up, insert conductor and push lever back down

#### Safe:

- Each wire is held individually, eliminating loose connections.
- Touch-proof and rated to 105°C.
- UL listed/CSA certified for 600 volts (1000 volts for fixtures and signs) and current rated largest conductor used.

#### Save Time:

- Tool free connection and disconnection with easy-to-use lever design.

IBS No.	Push-In Cond	Strand Copper	Solid Copper	Qty
 221-2401	2	18-12 AWG Strip Length =0.43in	20-12 AWG Strip Length =0.43in	25
 221-412	2	24-12 AWG Strip Length =0.43in	24-12 AWG Strip Length =0.43in	50
 221-413	3	24-12 AWG Strip Length =0.43in	24-12 AWG Strip Length =0.43in	50
 221-415	5	24-12 AWG Strip Length =0.43in	24-12 AWG Strip Length =0.43in	25

### Wall Nuts & Lever Nuts Assortment (Z02)














IBS No. 199R • 13 Items • 106 Pcs

Packaged in a locking steel drawer for easy storage and organization  
• Includes crimp tool •



#### Wall Nuts & Lever Nuts

Assortment No. 199R

773-162 2 WIRE WALL NUT 	773-164 4 WIRE WALL NUT 	773-166 6 WIRE WALL NUT 	773-168 8 WIRE WALL NUT 	773-173 3 WIRE WALL NUT 	
222-412 2 WIRE LEVER NUT 	222-413 3 WIRE LEVER NUT 	222-415 5 WIRE LEVER NUT 			
221-2401 INLINE SPLICE CLEAR LEVER NUT 	221-412 2 WIRE CLEAR LEVER NUT 	221-413 3 WIRE CLEAR LEVER NUT 	221-415 5 WIRE CLEAR LEVER NUT 		

ELECTRICAL

# IBS, INCORPORATED

## Quick Connectors Q3E



### Wire Nuts

- Color coded and flame retardant.
- Accepts solid and stranded wire with copper to copper connections.
- Cone shaped spring helps pull the wires into the connector.
- Pre-twisting of wires not required.
- CSA certified and UL listed.

	IBS No.	Color	Wire Combination Range	Voltage Rating	PKG
	<b>6x682</b>	Gray	22 to 14 AWG Min 2 #22 Max 1 #16 w/1 #18	300V	100
	<b>6x683</b>	Blue	22 to 14 AWG Min 2 #22 Max 3 #16	300V	100
	<b>6x684</b>	Orange	22 to 14 AWG Min 2 #18 & 1 #20 Max 2 #14	600V	100
	<b>6x685</b>	Yellow	18 to 12 AWG Min 2 #18 Max 4 #14 & 1 #12	600V	100
	<b>6x686</b>	Red	18 to 6 AWG Min 2 #18 Max 2 #14 & 4 #18	600V	50
	<b>6x687</b>	Yellow Winged	18 to 12 AWG Min 2 #14 Max 4 #14 & 1 #18	600V	50
	<b>6x688</b>	Red Winged	18 to 6 AWG Min 2 #14 Max 4 #12	600V	50
	<b>6x689</b>	Gray	18 to 8 AWG Min 3 #14 w/1 #18 Max 3 #10	600V	25
	<b>6x690</b>	Blue	14 to 6 AWG Min 2 #10 w/1#12 Max 1#8 w/3 #10	600V	25
	<b>6x691</b>	Gold	22 to 8 AWG Min 3 #22 Max 4 #12	600V	50
	<b>6x692</b>	Green	14 to 10 AWG Min 2 #14 Max 5 #10	1000V	50

### Instant Auto Connectors

- Electrically connects (tap) wire ends to through (run) wires and insulates the connection.
- No special tools needed — standard pliers easily make the connection.
- No wire stripping, twisting, or soldering necessary.



IBS No.	Color	Wire	Type	Splices	Qty
<b>801</b>	Blue	18-14	Gen. Purp.	tap, inline pigtail	25
<b>902</b>	Brown	18-14	Gen Purp		25
<b>903</b>	Yellow	12-10	Hvy Duty		25
<b>905</b>	Red	22-18	Low Volt		25

### Self-Stripping Disconnects

- Easily makes midspan connections without stripping insulation.
- Disconnectable tap leg simplifies hook-up, enhances flexibility.
- Will mate with most .250" male blades.
- Self-stripping connector speeds installation, reduces possible conductor damage and eliminates time consuming mid-span tap.
- Provides a circuit test point.
- Fully insulated feature eliminates second step insulating and improves circuit isolation.
- Installs with pliers — no special tools required.

	IBS No.	Wire	Qty
	<b>952F-250-32-NL</b>	18-14	50
	<b>953F-250-32-NL</b>	12	50

### Self-Stripping Pigtail Connector

- Sealant filled to protect against corrosion.
- Installs with pliers - no special tools required.
- One size covers 4 wire ranges 22-14.
- Flame retardant - safe at normal engine temperatures.
- Clear plastic case allows visual inspection.
- Use in a variety of marine and auto applications.

	IBS No.	Wire	Qty
	<b>3M-314</b>	Covers 4 wire ranges: 22-14	25

ELECTRICAL



# IBS, INCORPORATED

## Quick Connectors Q3E

### Wall Nuts, Lever Nuts & Wire Nuts Assortment (Z02)

IBS No. 198R • 15 Items • 256 Pcs

Packaged in a locking steel drawer for easy storage and organization

• Includes crimp tool •




**IBS, Inc.**  
SPECIALTY PRODUCTS FOR MAINTENANCE & REPAIR  
INDUSTRIALBOLT.COM ☎ 800-678-1906

#### Wire Nuts

Assortment No. 198R

<b>6X682</b> GRAY WIRE NUTS  ██████████	<b>6X683</b> BLUE WIRE NUT/REPLACES BLK  ██████████	<b>6X684</b> ORANGE WIRE NUTS  ██████████	<b>6X685</b> YELLOW WIRE NUT  ██████████	<b>6X686</b> RED WIRE NUT  ██████████	<b>TH450</b> AUTO WIRE CRIMPER/STRIPPER  ██████████
<b>6X687</b> YELLOW WIRE NUT WINGED  ██████████	<b>6X688</b> RED WIRE NUT WINGED  ██████████	<b>6X689</b> GRAY WIRE NUT WINGED  ██████████	<b>6X690</b> BLUE WIRE NUT WINGED  ██████████	<b>6X691</b> TAN WIRE NUT WINGED  ██████████	
<b>6X692</b> GREEN GROUNDING WIRE NUT WINGED  ██████████					
<b>973</b> O/B MULTI WIRE NUT  ██████████	<b>974</b> RED/YELLOW MULTI WIRE NUT  ██████████	<b>975</b> BLUE / GRAY MULTI WIRE NUT  ██████████			

### Wire Nuts Travel Tray (Z02)




#### 741R Wire Nuts Travel Tray

6 Items • 90 Pcs

Packaged in a clear plastic locking container

IBS No.	Description	Qty
6x683	Blue Wire Nut	20
6x684	Orange Wire Nut	20
6x685	Yellow Wire Nut	15
6x686	Red Wire Nut	15
6x687	Yellow Wire Nut - Winged	10
6x688	Red Wire Nut - Winged	10

### Wall & Lever Nut Travel Tray (Z02)



#### 740R Wall & Lever Nut Travel Tray

9 Items • 105 Pcs

Packaged in a clear plastic locking container

IBS No.	Description	Qty
773-162	2 Wire Wall Nut	20
773-164	4 Wire Wall Nut	15
773-166	6 Wire Wall Nut	10
773-168	8 Wire Wall Nut	10
773-173	3 Wire Wall Nut	10
221-2401	Inline Splice Lever Nut	10
221-412	2 Wire Lever Nut	10
221-413	3 Wire Lever Nut	10
221-415	5 Wire Lever Nut	10

ELECTRICAL



# IBS, INCORPORATED

## Deutsch Connectors & Terminals Q3G



### Deutsch Connectors & Terminals

Deutsch connectors and terminals are environmentally sealed electrical connectors for critical applications where moisture, salt spray, dirt or dust could potentially damage electrical connections or systems. Designed for cable to cable applications on engines, transmissions, under the hood or in the cab.

#### FEATURES & BENEFITS

- A single contact system terminates all connectors by utilizing common tooling and processes, creating an error-free connection.
- Copper crimp-type terminals with a stainless steel sleeve covering the fingers for protection to the fingers and increased performance and long life.
- When properly crimped, terminations provide an air-tight crimp which is highly resistant to increases of electrical resistance caused by oxidation and variations in temperature.
- Pins have no retention tangs and therefore are not subject to damage during assembly and re-work.
- Shells are made of flame-retardant, high-grade thermoplastics for maximum performance.
- No additional sealing required — connectors are sealed when snapped together making assembly time fast and easy.
- Fail-safe connector assembly designed to allow installation only after wedge locks and pins are inserted properly.
- Housings are rated -55°C to +125°C and silicone seals allow the connector to withstand extreme temperature and moisture, making them extremely versatile in a wide range of applications.
- Properly wired and mated connection will withstand immersion under three feet of water without loss of electronic qualities or leakage.
- Positive locking mechanism keeps connectors mated even in extreme vibration.

#### APPLICATIONS

Agriculture • Construction • Forestry  
 Emergency Vehicles • Marine • Military  
 Material Handling Lifts • Mining  
 Off-Highway • Recreation / Racing  
 Truck / Bus

### Deutsch Terminals



Socket for Plug    Pin for Receptacle    Seal Plug

#### DEUTSCH TERMINALS

IBS No.	Description	Qty
125100	Deutsch 16-18 GA Socket	25
125102	Deutsch 16-18 GA Pin	25
125101	Deutsch 14-16 GA Socket	25
125103	Deutsch 14-16 GA Pin	25
125126	Deutsch Seal Plug	1

### Deutsch Connector Tools



125124

125125



125127

IBS No.	Description	Qty
125124	Deutsch Removing Tool	1
125125	Deutsch Crimping Tool	1
125127	Deutsch Economy Crimping Tool	1

ELECTRICAL




# IBS, INCORPORATED

## Deutsch Connectors & Terminals Q3G

ELECTRICAL

### Deutsch 2-Way Connectors

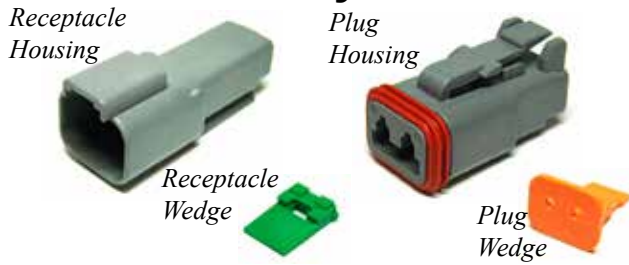

IBS No.	Description	Qty
125104	2-Way Receptacle Housing	5
125114	2-Way Receptacle Wedge	5
125105	2-Way Plug Housing	5
125115	2-Way Plug Wedge	5

### Deutsch 6-Way Connectors




IBS No.	Description	Qty
125110	6-Way Receptacle Housing	5
125120	6-Way Receptacle Wedge	5
125111	6-Way Plug Housing	5
125121	6-Way Plug Wedge	5

### Deutsch 3-Way Connectors




IBS No.	Description	Qty
125106	3-Way Receptacle Housing	5
125116	3-Way Receptacle Wedge	5
125107	3-Way Plug Housing	5
125117	3-Way Plug Wedge	5

### Deutsch 8-Way Connectors

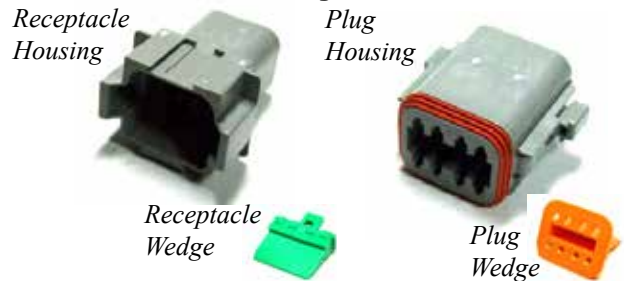

IBS No.	Description	Qty
125112	8-Way Receptacle Housing	5
125122	8-Way Receptacle Wedge	5
125113	8-Way Plug Housing	5
125123	8-Way Plug Wedge	5

### Deutsch 4-Way Connectors

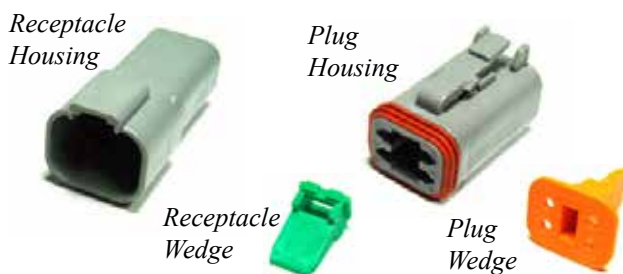

IBS No.	Description	Qty
125108	4-Way Receptacle Housing	5
125118	4-Way Receptacle Wedge	5
125109	4-Way Plug Housing	5
125119	4-Way Plug Wedge	5

### Deutsch 12-Way Connectors



IBS No.	Description	Qty
125130	12-Way Receptacle Housing	5
125140	12-Way Receptacle Wedge	5
125131	12-Way Plug Housing	5
125141	12-Way Plug Wedge	5

### DTP Deutsch Connectors

DEUTSCH environmentally sealed electrical connectors are designed for harsh operating environments and critical applications where dirt, moisture, salt spray, and rough terrain can otherwise contaminate or damage electrical connections.

Deutsch's DTP connectors are the solution for sealed power application requirements. DTP Series connectors offer the proven reliability and quality of Deutsch's DT Series, filling the need for higher amperage. They are environmentally sealed and come in two and four pin arrangements.

The DTP Series offers designers the ability to use multiple size 12 contacts, each with a 25 amp continuous capacity, within a single shell.

#### FEATURES & BENEFITS

- Accepts contact size 12 (25 amps)
- 10-14 AWG
- 2 and 4 cavity arrangements
- In-line, flange, or PCB mount
- Rectangular, thermoplast housing
- Integrated latch for mating
- Wedgelocks assure contact alignment and retention

#### DTP 2-Way Connectors



IBS No.	Description	Qty
125152	2-Way Receptacle Housing DTP Series	5
125162	2way Receptacle Wedge DTP Series	5
125153	2way Plug 10-14AWG DTP Series	5
125163	2way Plug Wedge DTP Series	5

#### DTP 4-Way Connectors




IBS No.	Description	Qty
125154	4way Receptacle Housing DTP Series	5
125164	4-Way Receptacle Wedge DTP Series	5
125155	4-Way Plug Housing DTP Series	5
125165	4-Way Plug Wedge DTP Series	5

#### DTP TERMINALS



IBS No.	Description	Qty
125151	12-14GA Pin DTP Series	25
125150	12-14GA Socket DTP Series	25

**DTP Deutsch Connectors & Tools Assortment**  
**IBS No. 857R • 12 Items • 90 Pcs**  
**Bundled with Crimping & Removal Tools**  
**Packaged in a locking steel drawer for easy storage and organization**

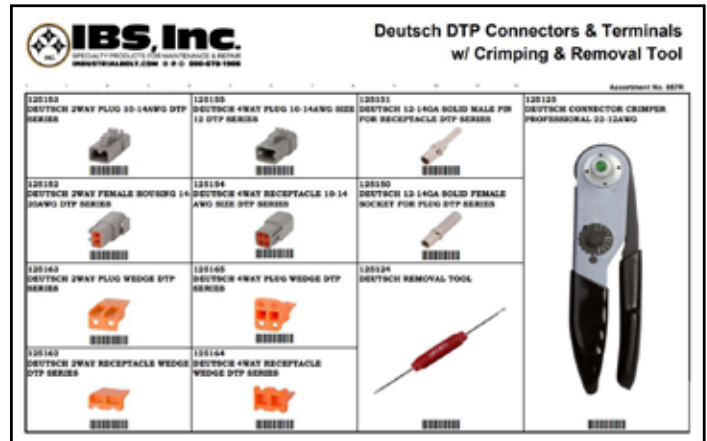

**Assortment also available without tools included:**

**IBS No. 858R • 10 Items • 88 Pcs**  
**Packaged in a locking steel drawer for easy storage and organization**  
**• No tools included •**



# IBS, INCORPORATED

## Assortments Z02

E  
L  
E  
C  
T  
R  
I  
C  
A  
L

### Deutsch DT Connectors & Terminals Assortment

Bundled with Crimping & Removal Tools

IBS No. 768R • 26 Items • 134 Pcs

Packaged in a locking steel drawer for easy storage & organization



IBS No. 125124  
Removing Tool



IBS No. 125125  
Crimping Tool

**IBS, Inc.**  
SPECIALTY PRODUCTS FOR MAINTENANCE & REPAIR  
INDUSTRIALDRAT.COM © P O BOX 478-1806

Deutsch DT Connectors & Terminals with Crimping & Removal Tools

Assortment No. 768R

125104 DEUTSCH 2WAY RECEPTACLE HOUSING	125106 DEUTSCH 3WAY RECEPTACLE HOUSING	125108 DEUTSCH 4WAY RECEPTACLE HOUSING	125110 DEUTSCH 6WAY RECEPTACLE HOUSING	125112 DEUTSCH SWAY RECEPTACLE HOUSING	125100 DEUTSCH 16-18GA SOCKET FOR PIN
125105 DEUTSCH 2WAY PLUG HOUSING	125107 DEUTSCH 3WAY PLUG HOUSING	125109 DEUTSCH 4WAY PLUG HOUSING	125111 DEUTSCH 6WAY PLUG HOUSING	125113 DEUTSCH SWAY PLUG HOUSING	125102 DEUTSCH 16-18GA PIN FOR RECEPTACLE
125114 DEUTSCH 2WAY RECEPTACLE WEDGE	125116 DEUTSCH 3WAY RECEPTACLE WEDGE	125118 DEUTSCH 4WAY RECEPTACLE WEDGE	125120 DEUTSCH 6WAY FEMALE WEDGE	125122 DEUTSCH SWAY FEMALE WEDGE	125101 DEUTSCH 14-16GA SOCKET FOR PLUG
125115 DEUTSCH 2WAY PLUG WEDGE	125117 DEUTSCH 3WAY PLUG WEDGE	125119 DEUTSCH 4WAY PLUG WEDGE	125121 DEUTSCH 6WAY MALE WEDGE	125123 DEUTSCH SWAY MALE WEDGE	125103 DEUTSCH 14-16GA PIN FOR RECEPTACLE

### Deutsch DT Connectors & Terminals Assortment

IBS No. 769R • 24 Items • 132 Pcs

Packaged in locking steel drawer for easy storage & organization



**IBS, Inc.**  
SPECIALTY PRODUCTS FOR MAINTENANCE & REPAIR  
INDUSTRIALDRAT.COM © P O BOX 478-1806

Deutsch DT Connectors & Terminals

Assortment No. 769R

125104 DEUTSCH 2WAY RECEPTACLE HOUSING	125106 DEUTSCH 3WAY RECEPTACLE HOUSING	125108 DEUTSCH 4WAY RECEPTACLE HOUSING	125110 DEUTSCH 6WAY RECEPTACLE HOUSING	125112 DEUTSCH SWAY RECEPTACLE HOUSING	125100 DEUTSCH 16-18GA SOCKET FOR PIN
125105 DEUTSCH 2WAY PLUG HOUSING	125107 DEUTSCH 3WAY PLUG HOUSING	125109 DEUTSCH 4WAY PLUG HOUSING	125111 DEUTSCH 6WAY PLUG HOUSING	125113 DEUTSCH SWAY PLUG HOUSING	125102 DEUTSCH 16-18GA PIN FOR RECEPTACLE
125114 DEUTSCH 2WAY RECEPTACLE WEDGE	125116 DEUTSCH 3WAY RECEPTACLE WEDGE	125118 DEUTSCH 4WAY RECEPTACLE WEDGE	125120 DEUTSCH 6WAY FEMALE WEDGE	125122 DEUTSCH SWAY FEMALE WEDGE	125101 DEUTSCH 14-16GA SOCKET FOR PLUG
125115 DEUTSCH 2WAY PLUG WEDGE	125117 DEUTSCH 3WAY PLUG WEDGE	125119 DEUTSCH 4WAY PLUG WEDGE	125121 DEUTSCH 6WAY MALE WEDGE	125123 DEUTSCH SWAY MALE WEDGE	125103 DEUTSCH 14-16GA PIN FOR RECEPTACLE

### Deutsch DT Connectors & Terminals Assortment II

Bundled with Crimping & Removal Tools

IBS No. 780R • 26 Items • 134 Pcs

Packaged in a locking steel drawer for easy storage & organization



IBS No. 125124  
Removing Tool



IBS No. 125127  
Crimping Tool

**IBS, Inc.**  
SPECIALTY PRODUCTS FOR MAINTENANCE & REPAIR  
INDUSTRIALDRAT.COM © P O BOX 478-1806

Deutsch DT Connectors & Terminals

Assortment No. 780R

125104 DEUTSCH 2WAY FEMALE HOUSING	125106 DEUTSCH 3WAY FEMALE HOUSING	125108 DEUTSCH 4WAY FEMALE HOUSING	125110 DEUTSCH 6WAY FEMALE HOUSING	125112 DEUTSCH SWAY FEMALE HOUSING	125100 DEUTSCH 16-18GA FEM TERMINAL
125105 DEUTSCH 2WAY MALE HOUSING	125107 DEUTSCH 3WAY MALE HOUSING	125109 DEUTSCH 4WAY MALE HOUSING	125111 DEUTSCH 6WAY MALE HOUSING	125113 DEUTSCH SWAY MALE HOUSING	125102 DEUTSCH 16-18GA MALE TERMINAL
125114 DEUTSCH 2WAY FEMALE WEDGE	125116 DEUTSCH 3WAY FEMALE WEDGE	125118 DEUTSCH 4WAY FEMALE WEDGE	125120 DEUTSCH 6WAY FEMALE WEDGE	125122 DEUTSCH SWAY FEMALE WEDGE	125101 DEUTSCH 14-16GA FEM TERMINAL
125115 DEUTSCH 2WAY MALE WEDGE	125117 DEUTSCH 3WAY MALE WEDGE	125119 DEUTSCH 4WAY MALE WEDGE	125121 DEUTSCH 6WAY MALE WEDGE	125123 DEUTSCH SWAY MALE WEDGE	125103 DEUTSCH 14-16GA MALE TERMINAL



# IBS, INCORPORATED

## Metripack Connectors & Terminals Q3G



### Metripack 280 Series Connectors & Terminals

Metripack 280 Series in-line connectors feature high current and current density in a small compact design as well as excellent resistance to temperature, chemicals, and abrasion.

These may be used in under-hood automotive applications as well as most marine, appliance, agricultural and industrial control applications. Designed for 16 volts DC and 30 amps maximum. Metripack 280 Series sealed systems are ideally suited for critical, low-energy applications that require protection from environmental hazards.



### Metripack Cable Seals



125201



125202



125203

IBS No.	Description	Qty
125201	Metripack Green 16-20 GA Seal	50
125202	Metripack Gray 14-16 GA Seal	50
125203	Metripack Blue 12-14 GA Seal	50

### Metripack 16-18 Terminals



125212



125215

IBS No.	Description	Qty
125212	Metripack 16-18 GA - Male	50
125215	Metripack 16-18 GA - Female	50

### Metripack 12-14 Terminals



125213



125216

IBS No.	Description	Qty
125213	Metripack 12-14 GA - Male	50
125216	Metripack 12-14 GA - Female	50

### Metripack 1 Connectors



125204



125208



125218

IBS No.	Description	Qty
125204	Metripack 1 Connector - Male	5
125208	Metripack 1 Connector - Female	5
125218	Metripack 1 Contact TPA Black	10

### Metripack 2 Connectors



125205



125209



125219

IBS No.	Description	Qty
125205	Metripack 2 Connector - Male	5
125209	Metripack 2 Connector - Female	5
125219	Metripack 2 Contact TPA Blue	10

ELECTRICAL



# IBS, INCORPORATED

## Metripack Connectors & Terminals Q3G

ELECTRICAL

### Metripack 3 Connectors



125206



125210




125220



125221

IBS No.	Description	Qty
125206	Metripack 3 Connector - Male	5
125210	Metripack 3 Connector - Female	5
125220	Metripack 3 Contact TPA Male	5
125221	Metripack 3 Contact TPA Female	5

### Metripack 5 Connectors



125207



125211



125222



125223

IBS No.	Description	Qty
125207	Metripack 5 Connector - Male	5
125211	Metripack 5 Connector - Female	5
125222	Metripack 5 Contact TPA Male	5
125223	Metripack 5 Contact TPA Female	5

### Metripack Cavity Plug



125224

IBS No.	Description	Qty
125224	Metripack Cavity Plug	5

### Metripack Crimping Tool



125225

IBS No.	Description	Qty
125225	Metripack Crimping Tool	1

### Metripack 22-12GA Crimper



125325

IBS No.	Description	Qty
125325	Weather-Pack 22-12GA Crimper	1

### Metripack Terminal Removal Tool



125226

IBS No.	Description	Qty
125226	Metripack Terminal Removal Tool	1

# IBS, INCORPORATED

## Assortments Z02



### Metripack 280 Series Assortment

With Crimping & Removal Tools  
 IBS No. 771R • 22 Items • 432 Pieces  
 Packaged in a locking steel box for easy storage & organization



IBS, Inc. SPECIALTY PRODUCTS FOR MANUFACTURING & SERVICE INDUSTRIALMARKET.COM © P O BOX 878 1926					Metripack 280 Series Electrical Connectors & Tools
128204 METRIPACK 1 PIN MALE CONNECTOR BODY	128208 METRIPACK 1 PIN FEMALE CONNECTOR BODY	128218 METRIPACK 1 PIN T.P.A. MALE & FEMALE	128201 METRIPACK GREEN CABLE SEAL 18-16 & 20-18 GAUGE	128212 METRIPACK 16-18 GAUGE MALE TERMINAL	Assortment No. 771R 
128205 METRIPACK 2 PIN MALE CONNECTOR BODY	128209 METRIPACK 2 PIN FEMALE CONNECTOR BODY	128219 METRIPACK 2 PIN T.P.A. MALE & FEMALE	128202 METRIPACK GRAY CABLE SEAL 14-16 GAUGE	128215 METRIPACK 16-18 GAUGE FEMALE TERMINAL	
128206 METRIPACK 3 PIN MALE CONNECTOR BODY	128210 METRIPACK 3 PIN FEMALE CONNECTOR BODY	128220 & 128221 METRIPACK 3 PIN T.P.A. MALE AND FEMALE	128203 METRIPACK BLUE CABLE SEAL 12-14 GAUGE	128213 METRIPACK 12-14 GAUGE MALE TERMINAL	
128207 METRIPACK 5 PIN MALE CONNECTOR BODY	128211 METRIPACK 5 PIN FEMALE CONNECTOR BODY	128222 & 128223 METRIPACK 5 PIN T.P.A. MALE AND FEMALE	128224 METRIPACK CAVITY PLUG	128216 METRIPACK 12-14 GAUGE FEMALE TERMINAL	

### Metripack 280 Series Assortment

IBS No. 770R • 20 Items • 430 Pieces  
 Packaged in a locking steel box for easy storage and organization



IBS, Inc. SPECIALTY PRODUCTS FOR MANUFACTURING & SERVICE INDUSTRIALMARKET.COM © P O BOX 878 1926					Metripack 280 Series Electrical Connectors
128204 METRIPACK 1 PIN MALE CONNECTOR BODY	128208 METRIPACK 1 PIN FEMALE CONNECTOR BODY	128218 METRIPACK 1 PIN T.P.A. MALE & FEMALE	128201 METRIPACK GREEN CABLE SEAL 18-16 & 20-18 GAUGE	128212 METRIPACK 16-18 GAUGE MALE TERMINAL	Assortment No. 770R 
128205 METRIPACK 2 PIN MALE CONNECTOR BODY	128209 METRIPACK 2 PIN FEMALE CONNECTOR BODY	128219 METRIPACK 2 PIN T.P.A. MALE & FEMALE	128202 METRIPACK GRAY CABLE SEAL 14-16 GAUGE	128215 METRIPACK 16-18 GAUGE FEMALE TERMINAL	
128206 METRIPACK 3 PIN MALE CONNECTOR BODY	128210 METRIPACK 3 PIN FEMALE CONNECTOR BODY	128220 & 128221 METRIPACK 3 PIN T.P.A. MALE AND FEMALE	128203 METRIPACK BLUE CABLE SEAL 12-14 GAUGE	128213 METRIPACK 12-14 GAUGE MALE TERMINAL	
128207 METRIPACK 5 PIN MALE CONNECTOR BODY	128211 METRIPACK 5 PIN FEMALE CONNECTOR BODY	128222 & 128223 METRIPACK 5 PIN T.P.A. MALE AND FEMALE	128224 METRIPACK CAVITY PLUG	128216 METRIPACK 12-14 GAUGE FEMALE TERMINAL	

### Metripack 280 Series Assortment II

With Crimping & Removal Tools  
 IBS No. 781R • 22 Items • 432 Pieces  
 Packaged in a locking steel box for easy storage & organization



IBS, Inc. SPECIALTY PRODUCTS FOR MANUFACTURING & SERVICE INDUSTRIALMARKET.COM © P O BOX 878 1926					Metripack 280 Series Electrical Connectors & Tools
128204 METRIPACK 1 PIN MALE CONNECTOR BODY	128208 METRIPACK 1 PIN FEMALE CONNECTOR BODY	128218 METRIPACK 1 PIN T.P.A. MALE & FEMALE	128201 METRIPACK GREEN CABLE SEAL 18-16 & 20-18 GAUGE	128212 METRIPACK 16-18 GAUGE MALE TERMINAL	Assortment No. 781R 
128205 METRIPACK 2 PIN MALE CONNECTOR BODY	128209 METRIPACK 2 PIN FEMALE CONNECTOR BODY	128219 METRIPACK 2 PIN T.P.A. MALE & FEMALE	128202 METRIPACK GRAY CABLE SEAL 14-16 GAUGE	128215 METRIPACK 16-18 GAUGE FEMALE TERMINAL	
128206 METRIPACK 3 PIN MALE CONNECTOR BODY	128210 METRIPACK 3 PIN FEMALE CONNECTOR BODY	128220 & 128221 METRIPACK 3 PIN T.P.A. MALE AND FEMALE	128203 METRIPACK BLUE CABLE SEAL 12-14 GAUGE	128213 METRIPACK 12-14 GAUGE MALE TERMINAL	
128207 METRIPACK 5 PIN MALE CONNECTOR BODY	128211 METRIPACK 5 PIN FEMALE CONNECTOR BODY	128222 & 128223 METRIPACK 5 PIN T.P.A. MALE AND FEMALE	128224 METRIPACK CAVITY PLUG	128216 METRIPACK 12-14 GAUGE FEMALE TERMINAL	

ELECTRICAL



# IBS, INCORPORATED

## Weatherpack Connectors & Terminals Q3G

### Weatherpack Connectors & Terminals



- **An environmentally-sealed electrical connection system**, utilizing a pin-and-socket configuration – designed to withstand exposure to extreme temperatures, moisture, harsh engine compartment vapors and chemicals with outstanding reliability
- **For 12V systems – 20A maximum** - Voltage rating: 0.05 to 16.0 volts
- **Pin and sleeve configuration** to alleviate stress relaxation
- **Secondary lock and Connector Position Assurance (CPA)** for improved system design
- **Dual-locking tangs on terminals** help prevent backing out
- **Terminal plugging** requires no orientation and positive locking indexing prevents mismatching of connectors
- **Weather-Pack seals are made of a self lubricating silicone and are multi-ribbed** to prevent moisture and other contaminants from entering the connector and causing terminal corrosion.

### Weatherpack Cable Seals



125201



125202



125203

IBS No.	Description	Qty
125201	Weatherpack Green 16-20 GA Seal	50
125202	Weatherpack Gray 14-16 GA Seal	50
125203	Weatherpack Blue 12-14 GA Seal	50

### Weatherpack Cavity Plug



125224

IBS No.	Description	Qty
125224	Weatherpack Cavity Plug	25

### Weatherpack 1 Connectors



125306



125307

IBS No.	Description	Qty
125306	Weatherpack 1 Tower Female	5
125307	Weatherpack 1 Shroud Male	5

### Weatherpack 2 Connectors



125308



125309

IBS No.	Description	Qty
125308	Weatherpack 2 Tower Female	5
125309	Weatherpack 2 Shroud Male	5

E  
L  
E  
C  
T  
R  
I  
C  
A  
L



# IBS, INCORPORATED

## Weatherpack Connectors & Terminals Q3G



### Weatherpack 3 Connectors



125310



125311

IBS No.	Description	Qty
125310	Weatherpack 3 Tower Female	5
125311	Weatherpack 3 Shroud Male	5

### Weatherpack 4 Connectors



125312



125313

IBS No.	Description	Qty
125312	Weatherpack 4 Tower Female	5
125313	Weatherpack 4 Shroud Male	5

### Weatherpack 6 Connectors



125314



125315

IBS No.	Description	Qty
125314	Weatherpack 6 Tower Female	5
125315	Weatherpack 6 Shroud Male	5

### Weatherpack 20-18 GA Terminals



125300



125301

IBS No.	Description	Qty
125301	Weatherpack 20-18 GA Female	50
125300	Weatherpack 20-18 GA Male	50

### Weatherpack 16-14 GA Terminals



125302



125303

IBS No.	Description	Qty
125303	Weatherpack 16-14 GA Female	50
125302	Weatherpack 16-14 GA Male	50

### Weatherpack 12 GA Terminals



125304



125305

IBS No.	Description	Qty
125305	Weatherpack 12 GA Female	25
125304	Weatherpack 12 GA Male	25

### Weatherpack 22-12GA Crimper



125325

IBS No.	Description	Qty
125325	Weather-Pack 22-12GA Crimper	1

### Weatherpack Terminal Extractor Tool



125326

IBS No.	Description	Qty
125326	Weather-Pack Terminal Extractor	1

ELECTRICAL



# IBS, INCORPORATED

## Assortments Z02

### Weatherpack Series Assortment

With Crimping & Removal Tools  
IBS No. 773R • 22 Items • 331 Pcs

Packaged in a locking steel box for easy storage & organization



ELECTRICAL



### Weatherpack Connectors and Terminals with Tools

Assortment No. 773R

<p>125307 WEATHERPACK 1 CAVITY SHROUD MALE</p> 	<p>125309 WEATHERPACK 2 CAVITY SHROUD MALE</p> 	<p>125311 WEATHERPACK 3 CAVITY SHROUD MALE</p> 	<p>125313 WEATHERPACK 4 CAVITY SHROUD MALE</p> 	<p>125315 WEATHERPACK 6 CAVITY SHROUD MALE</p> 	<p>125325 WEATHERPACK 22-12GA CRIMPER</p> <p>125326 WEATHERPACK TERM EXTRACTOR TOOL</p> 
<p>125306 WEATHERPACK 1 CAVITY TOWER FEMALE</p> 	<p>125308 WEATHERPACK 2 CAVITY TOWER FEMALE</p> 	<p>125310 WEATHERPACK 3 CAVITY TOWER FEMALE</p> 	<p>125312 WEATHERPACK 4 CAVITY TOWER FEMALE</p> 	<p>125314 WEATHERPACK 6 CAVITY TOWER FEMALE</p> 	
<p>125300 WEATHERPACK 20-18GA MALE TERMINAL</p> 	<p>125302 WEATHERPACK 16-14GA MALE TERMINAL</p> 	<p>125304 WEATHERPACK 12GA MALE TERMINAL</p> 	<p>125201 METRIPACK/WEATHERPK SEALGRN 18-16/20-18GA</p> 	<p>125203 METRIPACK/WEATHERPK SEAL BLUE 14-12 GA</p> 	
<p>125301 WEATHERPACK 20-18GA FEMALE TERMINAL</p> 	<p>125303 WEATHERPACK 16-14GA FEMALE TERMINAL</p> 	<p>125305 WEATHERPACK 12GA FEMALE TERMINAL</p> 	<p>125202 METRIPACK/WEATHERPK SEAL GRAY 16-14 GAUGE</p> 	<p>125224 METRIPACK/WEATHERPK CAVITY PLUG</p> 	

### Weatherpack Series Assortment

IBS No. 772R • 20 Items • 329 Pcs

Packaged in a locking steel box for easy storage & organization





### Weatherpack Connectors and Terminals

Assortment No. 772R

<p>125307 WEATHERPACK 1 CAVITY SHROUD MALE</p> 	<p>125309 WEATHERPACK 2 CAVITY SHROUD MALE</p> 	<p>125311 WEATHERPACK 3 CAVITY SHROUD MALE</p> 	<p>125313 WEATHERPACK 4 CAVITY SHROUD MALE</p> 	<p>125315 WEATHERPACK 6 CAVITY SHROUD MALE</p> 	
<p>125306 WEATHERPACK 1 CAVITY TOWER FEMALE</p> 	<p>125308 WEATHERPACK 2 CAVITY TOWER FEMALE</p> 	<p>125310 WEATHERPACK 3 CAVITY TOWER FEMALE</p> 	<p>125312 WEATHERPACK 4 CAVITY TOWER FEMALE</p> 	<p>125314 WEATHERPACK 6 CAVITY TOWER FEMALE</p> 	
<p>125300 WEATHERPACK 20-18GA MALE TERMINAL</p> 	<p>125302 WEATHERPACK 16-14GA MALE TERMINAL</p> 	<p>125304 WEATHERPACK 12GA MALE TERMINAL</p> 	<p>125201 METRIPACK AND WEATHERPACK SEAL</p> 	<p>125203 METRIPACK AND WEATHERPACK SEAL</p> 	
<p>125301 WEATHERPACK 20-18GA FEMALE TERMINAL</p> 	<p>125303 WEATHERPACK 16-14GA FEMALE TERMINAL</p> 	<p>125305 WEATHERPACK 12GA FEMALE TERMINAL</p> 	<p>125202 METRIPACK WEATHERPACK SEAL</p> 	<p>125224 METRIPACK &amp; WEATHERPACK CAVITY PLUG</p> 	

### Scotch® Brand 88 Electrical Tape

88 Vinyl Plastic Electrical Tape  
for Cold Weather Resistance

- Extra thickness provides added electrical properties, quicker installation buildup and abrasion resistance.
- Flame retardant.
- Hot and cold weather resistant.
- Resists UV rays, abrasion, moisture, alkalies acids and corrosion.
- Meets requirements of ASTMD-3005 Type I, UL510, MIL-I-24391 and CSA C22.2.
- Temperature Range: -18°C/0°F to +105°C/220°F.



IBS No.	MIL Thick	Color	Length	Qty
3M6143	8.5	Black	3/4" x 66'	1

### Scotch Brand 33+ Electrical Tape

33+ Vinyl Plastic Professional Grade  
Electrical Tape

- Use as a primary insulation for wire cable splices up to 600 volts and for fixture and wire splices up to 1kV.
- Flame retardant.
- Hot and cold weather resistant.
- Resists UV rays, abrasion, moisture, alkalies acids and corrosion.
- Meets requirements of ASTMD-3005 Type I, UL510, HHI-595C and CSA C22.2.
- Temperature Range: -18°C/0°F to +105°C/220°F.



IBS No.	MIL Thick	Color	Length	Qty
3M6133	7.0	Black	3/4" x 76'	1

### Super Black Vinyl Electrical Tape

Vinyl Plastic Electrical Tape  
for Cold Weather Resistance  
**3M SUPER 88 EQUIVALENT**

- 8.5 mil (0.21mm) all weather, professional grade, pressure sensitive vinyl tape that provides heavier thickness for added mechanical & electrical protection.
- Flame retardant.
- Cold and weather resistant.
- Can be used for splices at not more than 600 Volts.
- Resists UV rays, abrasion, moisture, alkalies acids and corrosion.
- Meets requirements of ASTMD-3005 Type I, UL510, and MIL-I-24391.



IBS No.	MIL Thick	Color	Length	Qty
6143	8.5	Black	3/4" x 66'	1

### Premium+ Black Vinyl Electrical Tape

7.0 MM Vinyl Plastic Professional Grade  
Electrical Tape

**3M 33+ EQUIVALENT**

- Use as a primary insulation for wire cable splices up to 600 volts and for fixture and wire splices up to 1kV.
- Flame retardant.
- Hot and cold weather resistant.
- Resists UV rays, abrasion, moisture, alkalies acids and corrosion.
- Meets requirements of ASTMD-3005 Type I, UL510, HHI-595C and CSA C22.2.
- Temperature Range: -18°C/0°F to +105°C/220°F.



IBS No.	MIL Thick	Color	Length	Qty
6132	7	Black	3/4" x 66'	1

ELECTRICAL



# IBS, INCORPORATED

## Tapes & Sealants Q1D

### Colored Electrical Tape

Just like our standard electrical tape, this PVC electrical tape has excellent elongation and creep back characteristics for tighter, more permanent wraps. No adhesion transfer assures consistent sealing. Suitable for use up to 600 Volts and a maximum temperature of 176°F (80°C).

Each roll measures 3/4" x 60 ft.



IBS No.	Color	Length	Qty
N9010	Black	3/4" x 60'	10
145237	Blue	3/4" x 60'	5
145238	Green	3/4" x 60'	5
145239	White	3/4" x 60'	5
145240	Brown	3/4" x 60'	5
145241	Orange	3/4" x 60'	5
145242	Yellow	3/4" x 60'	5
145243	Gray	3/4" x 60'	5
145244	Red	3/4" x 60'	5

### Electrical Tape Assortment

**IBS No. 711R • 11 Items • 20 Pcs**  
Packaged in a locking steel drawer for easy storage and organization



IBS, Inc.			Electrical Tape
Assortment No. 711R			
145237 3/4 X 60FT BLUE ELECTRICAL TAPE	145238 3/4 X 60FT GREEN ELECTRICAL TAPE	145239 3/4 X 60FT WHITE ELECTRICAL TAPE	B9211 1" X 30' FUSION TAPE
145240 3/4 X 60FT BROWN ELECTRICAL TAPE	145241 3/4 X 60FT ORANGE ELECTRICAL TAPE	145242 3/4 X 60FT YELLOW ELECTRICAL TAPE	B9201 SILICONE TAPE - RED
145243 3/4 X 60FT GRAY ELECTRICAL TAPE	145244 3/4 X 60FT RED ELECTRICAL TAPE	N9010 3/4 X 60YD PVC ELECTRICAL	

### Black Liquid Electrical Tape

This product has thousands of uses in a variety of environments. Anytime electrical wires are exposed, this product is the perfect solution. Liquid electrical tape provides a totally sealed joint which is flexible and fire resistant. UV, water and most chemicals will not affect a joint sealed with Liquid Electrical Tape. Dries to the touch in about 10 minutes and fully cures in 24 hours.

- Forms a protective, waterproof, UV-resistant dielectric coating.
- Prevents corrosion on wires and terminals.
- Patented, UL tested, fast-drying formula.



IBS No.	Description	Qty
105124	Black Liquid Electrical Tape 4 oz.	1

### Fusion Tape

Fusion Tape is used by everyone from OEM manufacturers to contractors in most any industry; automotive, heavy duty, marine, utilities, and plant maintenance.



Seals pipes, hoses and wires as it insulates and bundles.

#### Fusion Tape is:

- A positive sealing cold shrink tape — requires no heat, which means no special tools are needed, and can be used to replace shrink tube.
- Temperature range is -40°F to 100°F continuous and 130°F intermittent — for all weather use.
- Has no sticky sides, and adheres only to itself — which makes it much easier to use than some shrink tubing.
- Withstands harsh cleaning chemicals and steam — for longer life.
- Has a 5 year shelf life — so you don't have to be concerned with it going bad prior to use.
- Cures to a tight, yet flexible waterproof bond — the benefit is that even where the seal is being flexed, the bond will hold.
- Begins to fuse in minutes, cures in a few hours and continues to constrict for 24 hours.
- Has a liner, a true fusing tape that won't start working until stretched.

IBS No.	Description	Qty
B9211	Fusion Tape 1" x 30'	1

E  
L  
E  
C  
T  
R  
I  
C  
A  
L



### Silicone Sealing Tape

Self-fusing tape cures without heat to form a solid rubber insulator. It has a minimum dielectric strength of 400 volts/mil. (.020" thick). It has a continuous operating temperature range from -60° to +200°C with intermittent up to +260°C. It has a minimum tensile strength of 700 psi and a tear resistance of 85 psi. It also has a 300% minimum ultimate elongation. It replaces shrink tape and can be used where shrink tubing would be impractical. Its ease of application and removability make it a versatile choice for insulating and weather-proofing.



IBS No.	Color	Width	Length	Qty
B9201	Red	1"	36 ft.	1
B9202	Black	1"	36 ft.	1
B9204	Gray	1"	36 ft.	1
B9205	Clear	1"	36 ft.	1
B9206	Red	2"	10 ft.	1
B9207	Black	2"	10 ft.	1
B9208	Gray	2"	10 ft.	1
B9209	Clear	2"	10 ft.	1

### Silicone Sealing Tape Assortment

**IBS No. 743R • 8 Items • 8 Pcs**  
**Packaged in a locking steel drawer for easy storage and organization**



**Silicone Sealing Tape**

Assortment No. 743R

<p style="font-size: x-small;">B9201 TAPE SILICONE RED 1" X 36'</p>	<p style="font-size: x-small;">B9202 TAPE SILICONE BLACK 1" X 36'</p>	<p style="font-size: x-small;">B9204 TAPE SILICONE GRAY 1" X 36'</p>	<p style="font-size: x-small;">B9205 TAPE SILICONE CLEAR 1" X 36'</p>
<p style="font-size: x-small;">B9206 TAPE SILICONE RED 2" X 10'</p>	<p style="font-size: x-small;">B9207 TAPE SILICONE BLACK 2" X 10'</p>	<p style="font-size: x-small;">B9208 TAPE SILICONE GRAY 2" X 10'</p>	<p style="font-size: x-small;">B9209 TAPE SILICONE CLEAR 2" X 10'</p>

### Sealing Compound

Consisting of a tough, all-weather grade elastic vinyl backing and a self-fusing, rubber-based insulating mastic, this sealing compound is designed to withstand bleach, water, steam, saltwater spray, oils, chemicals, hydraulic fluid, liquid detergent, JP-4, horse urine, and many more.

- Applies & seals quickly and easily.
- Rugged PVC backing resists abrasion, wear and tear.
- Can be applied from 0° to 100°F.
- Rated at 176°F continuous operation.
- Resists ultraviolet (sun) light.
- Is compatible with all thermoplastic and rubber wire insulation.
- Provides strain relief by taking pressure off connectors.
- Protects against vibration "shake-loose."
- Seals and insulates most connections: bolted, crimped or screw-type connectors, terminals, and self-stripping connectors.
- Seals and protects in all automotive applications including livestock carriers.



IBS No.	Description	Qty
6147	Roll 2-1/2" x 10 ft.	1
6149	Pre-Cut Patches 2-1/2 sq (25)	1

### Teflon Tape

- Teflon thread sealing tape
- Chemically inert, withstands alkalis, acids, oils and solvents.
- Can be used on iron, stainless steel, copper, brass, plastic, glass or rubber pipes.



IBS No.	Description	Qty
UT-11	Teflon Tape 1/2" x 520"	1



# IBS, INCORPORATED

## Tapes & Sealants Q1D

E  
L  
E  
C  
T  
R  
I  
C  
A  
L

### Red & White Conspicuity Tape


- DOT-C2 Compliance & Enhanced Visibility:**  
 The Tape meets DOT-C2 standards, making it suitable for regulatory compliance on trucks, trailers, and other vehicles.
- High Durability and Long-Lasting Performance:**  
 The Tape is backed by a 5-year warranty, offering reliable performance with resistance to fading, cracking, peeling, and lifting.
- Flexible and Easy to Apply:**  
 Flexible design allows for easy application to both curved and flat surfaces. Pressure-sensitive adhesive ensures strong bonding to cleaned metal surfaces and allows for easy installation. Can be applied in temperatures as low as 35°F (2°C), accommodating a wide range of climates.
- Superior Retro-reflection:**  
 The Tape offers superior retro-reflection with high coefficients of retro-reflection (RA) for both white and red colors, ensuring high visibility in low-light conditions. Performance is consistent under varying angles of observation and entrance angles, making it effective in all lighting conditions.
- Easy Maintenance and Cleaning:**  
 Low-maintenance with routine cleaning methods, including soft brushes, water, detergent, and high-pressure washing. Designed for resilience against dirt, grime, and weathering while maintaining its reflectivity over time.



IBS No.	Length	Qty
145330	2" x 150' Red/White DOT-C2 Reflective Conspicuity Tape 6" Red / 6" White	1
145331	2" x 150' Red/White DOT-C2 Reflective Conspicuity Tape 11" Red / 7" White	1

### Yellow Conspicuity Tape

- Regulatory Compliance & Enhanced Visibility:**  
 The tape meets FMVSS-217 requirements and is CSA D250 compliant, ensuring compliance for school buses and other vehicles. These highly retroreflective markings provide 24-hour visibility with both fluorescence and retroreflection for enhanced safety.
- Durable & Long-Lasting Performance:**  
 Backed by a 10-year warranty, these markings are resistant to fading, cracking, peeling, and lifting. Designed to withstand harsh conditions, they offer superior durability for up to 10 years, even in tough environments.
- Flexible & Easy to Apply:**  
 The pressure-sensitive adhesive and compressible liner make application fast and easy on both flat and curved surfaces. Available in rolls or kiss-cut pieces, the markings can be applied in temperatures as low as 50°F (10°C) for wide climate adaptability.
- Superior Retroreflection:**  
 Offering high retroreflective performance, these markings ensure excellent visibility under varying angles and lighting conditions, they provide maximum safety for school buses, day or night.
- Easy Maintenance & Cleaning:**  
 Low-maintenance markings are simple to clean with water, detergent, or soft brushes. They withstand high-pressure washing up to 1200 PSI and resist dirt and grime, ensuring long-term reflectivity and visibility with minimal upkeep.

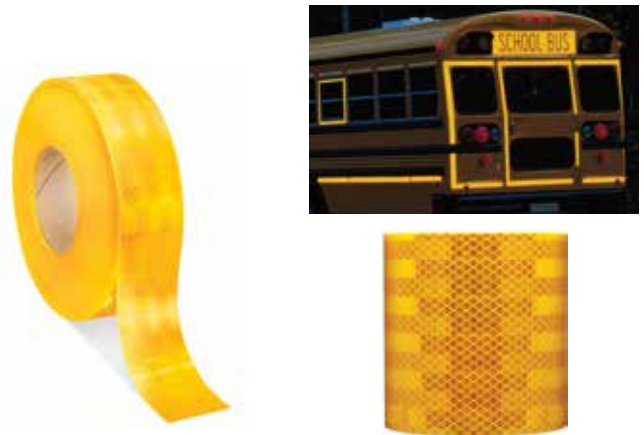

IBS No.	Length	Qty
145332	2" x 150' Yellow Diamond Grade Reflective Conspicuity Tape	1



### Blue Painter's Tape

- Ideal for long term masking projects when tape must be left on for up to a week or more.
- Removes cleanly and easily for up to 14 days without leaving adhesive residue.
- Can also be used on most previously painted surfaces, including painted wallboard and even glass and metal.
- UV Resistant; can be used in direct sunlight.
- Adhesion level: medium.
- Compatible with water-based, and solvent based coatings; not compatible with lacquer coatings or surfaces.
- Can be used on interior or exterior jobs.



IBS No.	Length	Qty
145333	1" x 60 yd	1
145335	2" x 60 yd	1

### Masking Tape

- An all-purpose, standard grade masking tape with excellent properties for most applications.
- Protects surfaces from unwanted paint.
- Easily peeled.
- Light bundling.



IBS No.	Description	Qty
UT77-1	Masking Tape 1" x 60 yds.	1
UT77-2	Masking Tape 2" x 60 yds.	1

### Duct Tape

- Contractors Grip — 11.0mm thick.
- Multi-purpose, polyethylene coated cloth, waterproof tape.
- Seals against loss of heated and cooled air.
- Conforms to irregular surfaces.



IBS No.	Description	Qty
UT-102	Duct Tape 2" x 60 yds (2160 in.)	1

ELECTRICAL



# IBS, INCORPORATED

## Cross-Link Wire Q06

### Heavy Duty Wire (Cross-Linked) — 100 Ft Spools

This general purpose wire is used where superior resistance to the elements, abrasion, and where extremes in temperature, both high and low, are encountered. Heavy duty cross-linked wire has a flexible, bare annealed copper conductor which is insulated with a special polyethylene base. Chemically cross-linked polyethylene is a compound which is vulcanized to obtain a thermoplastic wire insulation. A thermosetting insulation doesn't melt when exposed to heat after the vulcanization process. Our chemically cross-linked polyethylene features toughness combined with outstanding heat resistance. Meets SAEJ1128.

Voltage: Rated at **60VDC/25VAC** or less. Temperature: Rated at **-40°F (-40°C)** to **257°F (125°C)**.

	Color	22 GA	20 GA	18 GA	16 GA	14 GA	12 GA	10 GA
	BLACK	82301	82201	82183	82163	82141	82121	81103
	WHITE	82307	82207	82187	82167	82142	82122	81107
	RED	82303	82203	82181	82161	82143	82123	81101
	YELLOW	82302	82202	82182	82162	82144	82124	81102
	GREEN	82304	82204	82184	82164	82145	82125	81104
	BLUE	82305	82205	82185	82165	82146	82126	81105
	BROWN	82306	82206	82186	82166	82147	82127	81106
	ORANGE			82188	82168	82148		
	PURPLE					82149		

Wire Sold by Spools in Quantities of One

ELECTRICAL

### Heavy Duty (Cross-Linked) Primary Wire Assortments (Z08)

#### 4 Bar Wire Rack Assortment

IBS No. 341R • 16 (100 ft) spools



Color	14 GA	12 GA	10 GA
BLACK	82141 Qty: 1	82121 Qty: 1	81103 Qty: 1
WHITE	82142 Qty: 1	82122 Qty: 1	
RED	82143 Qty: 1	82123 Qty: 1	81101 Qty: 1
YELLOW	82144 Qty: 1		
GREEN	82145 Qty: 1	82125 Qty: 1	
BLUE	82146 Qty: 1	82126 Qty: 1	
BROWN	82147 Qty: 1	82127 Qty: 1	
PURPLE	82149 Qty: 1		

Arranged on a 4 bar wire rack - separates wire by ga

#### 2 Bar Wire Rack Assortment (Z02)

IBS No. 860R • 11 (100 ft) spools



Color	14 GA	12 GA	10 GA
BLACK	82141 Qty: 1	82121 Qty: 1	81103 Qty: 1
WHITE	82142 Qty: 1		
RED	82143 Qty: 1	82123 Qty: 1	81101 Qty: 1
YELLOW	82144 Qty: 1		
GREEN	82145 Qty: 1		
BLUE	82146 Qty: 1		
BROWN	82147 Qty: 1		

Arranged on a 2 bar wire rack - separates wire by ga



# IBS, INCORPORATED

## Primary Wire Q05



### General Purpose Thermoplastic — 100 Ft. Spools

Single conductor copper stranded primary wire with the highest quality poly-vinyl chloride insulation providing the best in flexibility, permanent color and resistance to acids, grease oil and diesel fumes. Primary wire is manufactured to meet all SAE type GPT specifications and will work safely between the operating temperatures of -20°F and +165°F.

Voltage: Rated at **60V** or less. Temperature: Rated at **-40°F (-40°C)** to **176°F (80°C)**.

	Color	20 GA	18 GA	16 GA	14 GA	12 GA	10 GA	8 GA
	<b>BLACK</b>	81203S	81183S	81163S	81143S	81123S	81103S	81083A
	<b>WHITE</b>	81207S	81187S	81167S	81147S	81127S	81107S	
	<b>RED</b>	81201S	81181S	81161S	81141S	81121S	81101S	81081A
	<b>YELLOW</b>	81202S	81182S	81162S	81142S	81122S	81102S	
	<b>GREEN</b>	81204S	81184S	81164S	81144S	81124S	81104S	
	<b>BLUE</b>	81205S	81185S	81165S	81145S	81125S	81105S	
	<b>BROWN</b>	81206S	81186S	81166S	81146S	81126S	81106S	
	<b>ORANGE</b>		81188S	81168S	81148S			
	<b>PURPLE</b>		81189S	81169S	81149S			

Primary Wire Sold by Spools in Quantities of One

### General Purpose Primary Wire Assortments (Z08)

#### 4 Bar Wire Rack Assortment

IBS No. 134R • 16 (100 ft) spools



	Color	16 GA	14 GA	12 GA	10 GA
	<b>BLACK</b>	81163S Qty: 1	81143S Qty: 1	81123S Qty: 1	81103S Qty: 1
	<b>WHITE</b>		81147S Qty: 1	81127S Qty: 1	
	<b>RED</b>	81161S Qty: 1	81141S Qty: 1	81121S Qty: 1	81101S Qty: 1
	<b>GREEN</b>		81144S Qty: 1	81124S Qty: 1	
	<b>BLUE</b>		81145S Qty: 1	81125S Qty: 1	
	<b>BROWN</b>		81146S Qty: 1	81126S Qty: 1	

Arranged on a 4 bar wire rack - separates wire by ga

#### 2 Bar Wire Rack Assortment (Z02)

IBS No. 302R • 11 (100 ft) spools



	Color	14 GA	12 GA	10 GA
	<b>BLACK</b>	81143S Qty: 1	81123S Qty: 1	81103S Qty: 1
	<b>WHITE</b>	81147S Qty: 1		
	<b>RED</b>	81141S Qty: 1	81121S Qty: 1	81101S Qty: 1
	<b>YELLOW</b>	81142S Qty: 1		
	<b>GREEN</b>	81144S Qty: 1		
	<b>BLUE</b>	81145S Qty: 1		
	<b>BROWN</b>	81146S Qty: 1		

Arranged on a 2 bar wire rack - separates wire by ga

ELECTRICAL



# IBS, INCORPORATED

## Conducting Wire & Cable Q07

E  
L  
E  
C  
T  
R  
I  
C  
A  
L

### Trailer Cable

This general purpose, thermoplastic wire has the same wire construction as the parallel multiple conductor and has an overall grey colored, tough Typhayzel® jacket for additional protection against moisture and abrasion. The conductor is made up of 2 - 14GA wires. Colors are white and black.



MULTIPLE CONDUCTOR

IBS No.	GA	Description	Qty
8150S	12/6	Black, Red, Brown, Yellow Green & Blue - 100 ft spool	1
	10/1	White	
8157S	14/7	Red, Green, Brown, White, Black, Yellow, Blue 100 ft spool	1
8152S	14/4	Black, White, Red, Brown 100 ft spool	1
8151S	14/6	Red, Green, Brown, White, Black & Yellow - 100 ft spool	1
8155S	16/6	Red, Green, Brown, White, Black & Yellow - 100 ft spool	1

### Jacketed Multiple Conductor


This general purpose, thermoplastic wire has the same wire construction as the parallel multiple conductor and has an overall grey colored, tough Typhayzel® jacket for additional protection against moisture and abrasion. The conductor is made up of 2 - 14GA wires. Colors are white and black.



IBS No.	GA	Description	Qty
8131S	12/2	Black & White 100 ft spool	1
8132S	14/2	Black & White 100 ft spool	1
8133S	16/2	Black & White 100 ft spool	1
8134S	18/2	Black & White 100 ft spool	1

### Parallel Multiple Conductor

This general purpose, thermoplastic wire meets the same conditions as primary wire. The conductors are bonded together to simplify circuit identification and termination. This allows for faster, more convenient installation where two or more conductors are required. It is made up of 3 - 14GA conductors. Colors are yellow, green and brown.



IBS No.	GA	Description	Qty
8140S	14/3	Yellow, Green & Brown - 100 ft spool	1

### Clear Speaker Wire

Teledyne AWD speaker wire has a flat, parallel, flexible construction, SPT style, for easy split separation. The two copper conductors, one bar and one tinned, are protected with transparent, extruded, thermoplastic jacket which provides visible wire identification and positive polarity.



IBS No.	GA	Description	Qty
81000	18/2	100 ft spool	1

### IBS Battery / Welding Cable Type TPR (FT1) Rubber Polymer 6 AWG - 4/0 AWG • 600 Volts • -49°C to 105°C

#### Features

- Remains flexible even at - 49°C
- Extra flexible class K stranding
- - 49°C to 105°C, 600 Volt rating
- Jacketing compound passes UL WV1 Flame Test
- Resistant to oil, water, acid, gas, ozone, cuts, tears, and abrasion
- Made in the U.S.A.

#### Applications

Designed for heavy duty welding applications where extreme cold weather flexibility and resistance to cuts, tears, abrasion and welding sledge is required.



#### Conductor

- Bare, annealed electrolyte copper
- 30 AWG Class K rope lay stranding

#### Dual Insulated Jacketing Technology



An inner insulator of the same high quality compound in high contrast color is applied between the conductor and outer sheath for added safety. This provides: increased insulation, added flexibility, and allows the user to easily identify damage or wear.

Additionally, this eliminates corrosion inherent to paper separators found in cables of lesser quality, which extends the product's life and improves performance.

#### Outer Jacket

A proprietary rubber polymer (FT1) provides exceptional oil, water, acid, gas and ozone resistance.

- Is flame retardant.
- MSHA low smoke compliant.
- Durable, and extremely flexible at all operating temperatures.



IBS No.	Cable GA	Color	Stranding	AMP Rating	Terminal Color	Length	Qty
16498	6 GA	Black	266 x 30	80	Gray	25'	1
16499	6 GA	Red	266 x 30	80	Gray	25'	1
16500	4 GA	Black	420 x 30	120	Gray	25'	1
165001	4 GA	Red	420 x 30	120	Gray	25'	1
16501	2 GA	Black	665 x 30	240	Green	25'	1
165011	2 GA	Red	665 x 30	240	Green	25'	1
16502	1 GA	Black	833 x 30	300	Pink	25'	1
165022	1 GA	Red	833 x 30	300	Pink	25'	1
16503	1/0 GA	Black	1045 x 30	360	Black	25'	1
165033	1/0 GA	Red	1045 x 30	360	Black	25'	1
16504	2/0 GA	Black	1330 x 30	450	Orange	25'	1
165044	2/0 GA	Red	1330 x 30	450	Orange	25'	1
16506	3/0 GA	Black	1691 x 30	540	Purple	10'	1
165066	3/0 GA	Red	1691 x 30	540	Purple	10'	1
16508	4/0 GA	Black	2109 x 30	640	Yellow	10'	1
165088	4/0 GA	Red	2109 x 30	640	Yellow	10'	1



# IBS, INCORPORATED

## Shrink Tubing Q2A

### 6 to 1 Hi-Ratio Heat Shrink Tubing


- **Extremely versatile 6:1 shrink ratio** can accommodate a wide variety of connector shapes and configurations.
- **Rigid heavy wall and thermoplastic adhesive lining** provides a gas, water, and environmental seal for the toughest applications.
- **Dielectric strength** of 500 volts/mil.
- **Tough and durable** to provide exceptional insulation and abrasion protection.
- **Flame retardant material** meets MIL-I-23053/15A Specs.



IBS No.	Pre-Shrunk ID	Post-Shrunk ID	Wire Range	MAX Wall Thickness	Length	Color	Qty
B3315	3/4	.125	14 - 1 GA	.123	12"	Black	1
B3317	1-3/4	.29	2 - 750 MCM	.140	12"	Black	1
B3319	2-3/4	.46	3/0 - 1200 MCM	.190	12"	Black	1
B3320	3-1/2	.673	500 - 1300 MCM	.170	12"	Black	1

### Heavy Wall Heat Shrink Tubing

- Heavy wall polyolefin material assures superior abrasion protection and strain relief.
- Mastic-lined inner wall forms a weatherproof seal when heated to prevent failure due to corrosion and vibration.
- 3 to 1 shrink ratio means fewer part numbers to cover a variety of cable sizes resulting in less inventory.



IBS No.	Pre-Shrunk ID	Post-Shrunk ID	Wire Size	Color	Length	MAX Wall	Qty
B3501	.40	.150	12-6	Black	6"	.09	5
B3502	.40	.150	12-6	Red	6"	.09	5
B3503	.80	.20	8-1/0	Black	6"	.11	5
B3404	.80	.20	8-1/0	Red	6"	.11	5
B3505	1.10	.37	2-4/0	Black	6"	.12	5
B3405	1.10	.37	2-4/0	Red	6"	.12	5
B3605	1.5	.50	4/0-400	Black	12"	.17	1
B3601	2.0	.65	500-1000 MCM	Black	12"	.17	1
B3620	.80	.20	8-1	Black	48"	.11	1
B3630	1.10	.37	2-4/0	Black	48"	.12	1

### Heavy Wall Heat Shrink Tubing Assortment II (Z08)

IBS No. 295P • 12 Items • 86 Pcs

Packaged in a locking steel drawer for easy storage and organization



IBS Inc. INDUSTRIAL ADHESIVE TECHNOLOGIES INDUSTRIALADHESIVE.COM © 2013 800-478-1928		Heavy Wall Shrink Tubing II Assortment No. 295P	
B3505 2-4/0GA X 6" BLACK HVY		B3405 2-4/0GA X 6" RED HVY WALL	
B3503 8-1/0GA X 6" BLACK HEAVY SHRINK TUBE		B3404 8-1/0 GA X 6 RED HEAVY SHRINK TUBE	
B3501 12-6GA X 6" BLACK HVY SHRINK		B3502 12-6GA X 6" RED HVY SHRINK	
B3508 8-2GA X 6" CLEAR SHRINK TUBE		B282 12-10 SOLDER&SEAL SHRINK TUBE	
B3507 14-8GA X 6" CLEAR SHRINK TUBE		B281 16-14 SOLDER&SEAL SHRINK TUBE	
B3506 18-12GA X 6" CLEAR SHRINK		B280 22-18 SOLDER&SEAL SHRINK TUBE	



# IBS, INCORPORATED

## Shrink Tubing Q2A



### Automotive Dual Wall Heat Shrink Tubing

This polyolefin tubing can be used for sealing splices and terminals. In addition to weather-proofing your connection, it also provides strain relief and vibration resistance. An excellent alternative to heavy wall tubing in light duty applications. Ideal for automotive computer wiring and applications where vibration, moisture, or friction are present and may cause failure.

- **Double Wall Construction** creates a strong, durable connection that insulates to reduce failure due to vibration.
- **Heavy Duty** polyolefin material resists wear and assures superior abrasion protection and strain relief.
- **Inner wall** is lined with mastic that breaks down when heated to form a weatherproof seal against moisture, eliminating failure due to corrosion.

#### DUAL WALL SHRINK TUBING — CLEAR

IBS No.	Pre-Shrunk ID	Post-Shrunk ID	Wire Size	MAX Wall	Color	Length	Qty
B3506	1/4	.08	18-10	.040	Clear	6"	10
B3507	3/8	.12	14-8	.055	Clear	6"	10
B3508	1/2	.16	8-4	.070	Clear	6"	10
B3300	1/8	.04	30-18	.040	Clear	12"	10
B3301	3/16	.062	20-14	.040	Clear	12"	10
B3302	1/4	.08	18-10	.040	Clear	12"	10



- **Clear Outer Wall** allows for visual inspection before and after installation for fewer mistakes and less rework.

#### DUAL WALL SHRINK TUBING — BLACK & RED

IBS No. Red	IBS No. Black	Pre-Shrunk ID	Post-Shrunk ID	Wire Size	MAX Wall	Length	Qty
16480	16485	1/8	.040	30-18	.040	6"	8
16481	16486	3/16	.062	20-14	.040	6"	8
16482	16487	1/4	.080	18-10	.040	6"	8
16483	16488	3/8	.120	14-8	.055	6"	8
16484	16489	1/2	.160	8-4	.070	6"	8
16492	16490	3/4	.250	4-2/0	.085	6"	8
16493	16491	1	.320	2-4/0	.100	6"	8



### Automotive Dual Wall Heat Shrink Tubing Assortment

IBS No. 800R • 12 Items • 72 Pcs

Packaged in a locking steel drawer for easy storage and organization



IBS, Inc. SPECIALTY PRODUCTS FOR MAINTENANCE & REPAIR INDUSTRIALBOND.COM © 9 0 800-678-1906		Dual Wall Shrink Tubing	
		Assortment No. 800R	
16486 3/16 X 6IN BLACK DUAL WALL SHRINK TUBE		16481 3/16 X 6IN RED DUAL WALL SHRINK TUBE	
16487 1/4 X 6IN BLACK DUAL WALL SHRINK TUBE		16482 1/4 X 6IN RED DUAL WALL SHRINK TUBE	
16488 3/8 X 6IN BLACK DUAL WALL SHRINK TUBE		16483 3/8 X 6IN RED DUAL WALL SHRINK TUBE	
16489 1/2 X 6IN BLACK DUAL WALL SHRINK TUBE		16484 1/2 X 6IN RED DUAL WALL SHRINK TUBE	
16490 3/4 X 6IN BLACK DUAL WALL SHRINK TUBE		16492 3/4 X 6IN RED DUAL WALL SHRINK TUBE	
16491 1IN X 6IN BLACK DUAL WALL SHRINK TUBE		16493 1IN X 6IN RED DUAL WALL SHRINK TUBE	


ELECTRICAL



# IBS, INCORPORATED

## Shrink Tubing Q2A

### High Adhesive Flow Heat Shrink Tubing

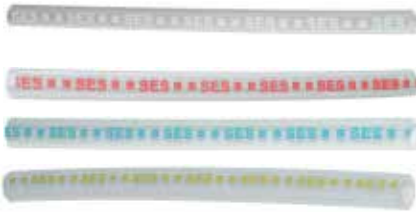

- Excellent for sealing multiple wires.
- Puncture resistant
- Provides superior strain relief.
- Clear with color coded lines

IBS No.	Pre-Shrunk ID	Post-Shrunk ID	Wire Size	MAX Wall	Color	Length	Qty
B3310	.220	.045	24-12	.057	White Dash	12"	5
B3311	.300	.060	22-10	.061	Red Dash	12"	5
B3312	.350	.080	16-8	.071	Blue Dash	12"	5
B3313	.450	.105	14-4	.096	Yellow Dash	12"	5


ELECTRICAL

### Heavy Wall Heat Shrink Tubing Assortment (Z02)

IBS No. 338R • 6 Items • 30 Pcs

Packaged in a locking steel drawer for easy storage and organization











**IBS, Inc.**  
SPECIALTY PRODUCTS FOR MAINTENANCE & REPAIR  
INDUSTRIALBOLT.COM © © © 800-678-1906

**Automotive Shrink Tubing**  
**12" Cut Lengths**

Assortment No. 338R

<p><b>B3313</b> 14-4AWG HI FLOW ADHESIVE</p>	
<p><b>B3312</b> 16-8AWG HI FLOW ADHESIVE</p>	
<p><b>B3311</b> 22-10AWG HI FLOW ADHESIVE</p>	
<p><b>B3310</b> 24-12AWG HI FLOW ADHESIVE</p>	
<p><b>B3301</b> 3/16 X 12" CLEAR DUAL WALL</p>	
<p><b>B3300</b> 1/8 X 12" CLEAR DUAL WALL</p>	

# IBS, INCORPORATED

## Shrink Tubing Q2A



### Color Coded Dual Wall Shrink Tubing

- **Tinted for color coding and is also translucent** to view underlying material.
- **Wire gauge imprint for ease of identification** before and after installation.
- **Adhesive lining** provides a barrier against contaminants.




IBS No.	Pre-Shrunk ID	Post-Shrunk ID	Wire Size	MAX Wall	Color	Length	Qty
B279	.115	.028	24-22	.06	Clear	6"	10
B280	.245	.045	22-18	.06	Red	6"	10
B281	.245	.080	16-14	.06	Blue	6"	10
B282	.360	.100	12*10	.06	Yellow	6"	10

### Automotive Shrink Tubing Assortment (Z02)















Includes Torch

**IBS No. 297R • 9 Items • 55 Pcs**

Packaged in a locking steel drawer for easy storage and organization



**Automotive Shrink Tubing**  
With MicroTorch Butane Torch Included  
Assortment No. 297R

<p><b>B281</b> 16-14 SOLDER&amp;SEAL SHRINK TUBE</p>  	<p><b>B282</b> 12-10 SOLDER/SEAL SHRINK TUBE</p>  
<p><b>B280</b> 22-18 SOLDER&amp;SEAL SHRINK TUBE</p>  	<p><b>B279</b> 24-22 SOLDER/SEAL SHRINK TUBE</p>  
<p><b>B3507</b> 14-8GA X 6 CLEAR SHRINK TUBE"</p>  	<p><b>B3508</b> 8-2GA X 6 CLEAR SHRINK TUBE"</p>  
<p><b>B3302</b> 1/4 X 12 CLEAR DUAL WALL"</p>  	
<p><b>B3301</b> 3/16 X 12 CLEAR DUAL WALL"</p>  	
<p><b>B3300</b> 1/8 X 12 CLEAR DUAL WALL"</p>  	

ELECTRICAL



# IBS, INCORPORATED

## Shrink Tubing Q2A

### Optiseal Adhesive-Lined Heat Shrink Tubing

- Provides optimal clarity for visual inspection.
- Adhesive-lined tubing ensures a waterproof seal.
- Wire gauge imprint simplifies wire size identification.

#### SPECIFICATIONS

**Material:** Cross-linked iconic polymer

**Shrink Ratio:** Exceeds 2.5 to 1

**Shrink/Recovery Temperature:** 90°C (194°F)

**Continuous Operating Temp:** -55°C to 125°C

**Flammability:** Passed (FMVSS 302 test)

**Tensile Strength:** 4,000 psi

**Longitudinal Change:** +1/-10% Max

**Dielectric Strength:** 750 V/Mil (30KV/MM)



IBS No.	Pre-Shrunk ID	Post-Shrunk ID	Wire Size	Color	Length	Qty
B5926	.176	.045	22-18	Clear	6"	10
B5924	.250	.080	16-14	Clear	6"	10
B5920	.365	.100	12-10	Clear	6"	10

### Optiseal Butt Connectors & Shrink Tubing (Z02)

Includes Torch

**IBS No. 728R • 6 Items • 100 Pcs**

Packaged in a locking plastic Travel Tray for easy storage and organization



**IBS, Inc.**  
SPECIALTY PRODUCTS FOR MAINTENANCE & REPAIR  
INDUSTRIALBOLT.COM © © © 800-678-1906

#### Optiseal Butt Connector & Shrink Tubing

Assortment No. 728R

<p>B5916 22-18 OPTISEAL BUTT CONNECTOR</p> 	<p>B5914 16-14 OPTISEAL BUTT CONNECTOR</p> 	<p>B5910 12-10 OPTISEAL BUTT CONNECTOR</p> 	<p>B5926 22-18 OPTISEAL HEAT SHRINK TUBING .260 X 6"</p> 	<p>B5924 16-14 OPTISEAL HEAT SHRINK TUBING .260 X 6"</p> 	<p>B5920 12-10 OPTISEAL HEAT SHRINK TUBING .375 X 6"</p> 
--	--	--	--	--	--

E  
L  
E  
C  
T  
R  
I  
C  
A  
L



### Thin Wall Heat Shrink Tubing — 48" Lengths

- Flexible polyolefin single wall tubing — will not crack or split.
- Withstands open flame.
- 2 to 1 shrink ratio — one part number covers 2 or more wire sizes.




IBS No. Red	IBS No. Black	Pre-Shrunk ID	Post-Shrunk ID	Wire Size	MAX Wall	Length	Qty
16513	16524	1/8	1/16	26-22	.020	48"	4
16514	16523	3/16	3/32	22-18	.020	48"	4
16515	16525	1/4	1/8	16-14	.025	48"	4
16516	16526	3/8	3/16	12-10	.025	48"	4
16517	16527	1/2	1/4	6-4	.025	48"	4
16518	16528	3/4	3/8	2-1	.030	48"	4
16519	16529	1	1/2	1/0	.035	48"	4

### Thin Wall Heat Shrink Tubing — 25' Rolls

**While Supplies Last**

- Flexible polyolefin single wall tubing — will not crack or split.
- Withstands open flame.
- 2 to 1 shrink ratio — one part number covers 2 or more wire sizes.

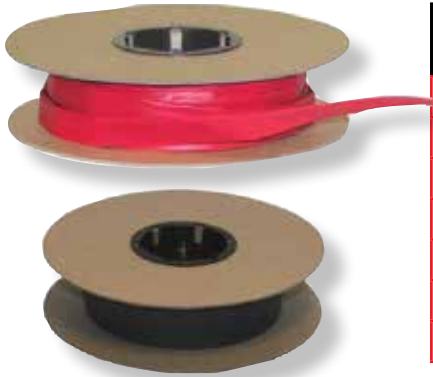


IBS No. Red	IBS No. Black	Pre-Shrunk ID	Post-Shrunk ID	Wire Size	MAX Wall	Length	Qty
16554	-	1/8	1/16	26-22	.020	25'	1
16553	-	3/16	3/32	22-18	.020	25'	1
16555	-	1/4	1/8	16-14	.025	25'	1
16556	-	3/8	3/16	12-10	.025	25'	1
16557	-	1/2	1/4	6-4	.025	25'	1
16558	-	3/4	3/8	2-1	.030	25'	1
16559	16589	1	1/2	1	.035	25'	1

ELECTRICAL



### ECOMAX™ Post Top Battery Terminals

ECOMAX™ Battery Terminals are the first environmentally friendly, 100% copper battery terminal. The post top design is manufactured with the highest quality C11000 ETP copper and is completely lead free and RoHS compliant — making it exempt from CA Proposition 65 requirement.

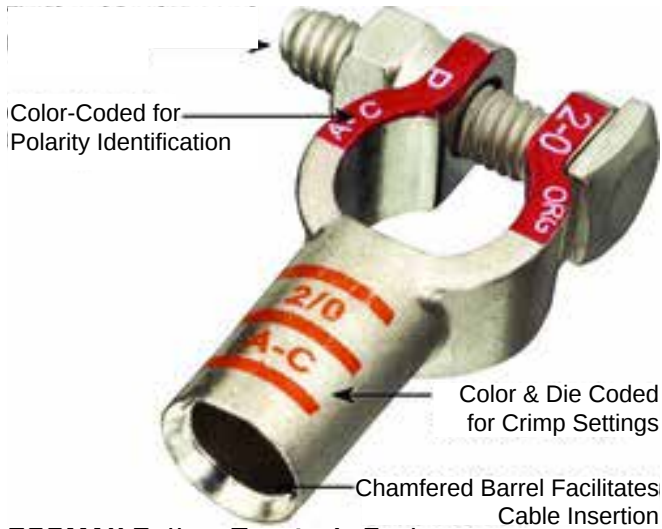

#### ECOMAX Battery Terminals Feature:

- Environmentally Friendly — RoHS compliant.
- Lead Free — Exempt from CA Proposition 65.
- 100% Copper Construction — C11000 ETP.
- Maximum Conductivity 101% IACS at 68°F.
- Tin plated for corrosion resistance.
- Provided with Nut and Bolt installed.
- Exceeds SAE Standard.

#### ECOMAX™ STRAIGHT CLAMP TERMINAL

IBS No.	Cable GA	Polarity	Color	Qty
E2102	4 GA	Univ	Gray	5
E2107	1+2 GA	Neg	Pink	5
E2108	1+2 GA	Pos	Pink	5
E2109	1/0	Neg	Black	5
E2110	1/0	Pos	Black	5
E2111	2/0	Neg	Orange	5
E2112	2/0	Pos	Orange	5
E2113	3/0	Neg	Purple	5
E2114	3/0	Pos	Purple	5
E2115	4/0	Neg	Yellow	5
E2116	4/0	Pos	Yellow	5



#### ECOMAX FLAG TERMINALS

IBS No.	Cable GA	Polarity	Color	Qty
E2209	1/0	Neg	Black	5
E2210	1/0	Pos	Black	5
E2211	2/0	Neg	Orange	5
E2212	2/0	Pos	Orange	5
E2213	3/0	Neg	Purple	5
E2214	3/0	Pos	Purple	5



#### ECOMAX™ RIGHT ELBOW TERMINALS

IBS No.	Cable GA	Polarity	Color	Qty
E2309	1/0	Neg	Black	5
E2310	1/0	Pos	Black	5
E2311	2/0	Neg	Orange	5
E2312	2/0	Pos	Orange	5



#### ECOMAX™ LEFT ELBOW TERMINALS

IBS No.	Cable GA	Polarity	Color	Qty
E2411	2/0	Neg	Orange	5
E2412	2/0	Pos	Orange	5

# IBS, INCORPORATED

## Assortments Z02



### EcoMax Terminals, HD Lugs & Splices Assortment

IBS No. 202P • 11 Items • 75 Pcs  
 Packaged in a locking steel drawer for easy storage and organization



IBS, Inc. SPECIALTY PRODUCTS FOR MANUFACTURING & SERVICE INDUSTRIALBOLT.COM © I.D. 800-878-1808		EcoMax Terminals Heavy Duty Lugs & Splices	
Assortment No. 202P			
BAL1038 1/0 X 3/8ST HVY DUTY TUBULAR LUG 	BAL1012 BATT TERM 1/0 X 1/2 STUD LUG HEAVY DUTY TUBULAR 	E2110 ECOMAX BATT TERM 1/0 GA POS 	E2109 ECOMAX BATT TERM 1/0 GA NEG 
BAL2038 2/0 X 3/8ST HVY DUTY TUBULAR LUG 	BAL2012 2/0 X 1/2ST HVY DUTY TUBULAR LUG 	E2112 ECOMAX BATT TERM 2/0 GA POS 	E2111 ECOMAX BATT TERM 2/0 GA NEG 
M5100 1/0GA HVY DUTY BUTT CONN 	M5200 2/0GA HVY DUTY BUTT CONN 		
B1110 5/16 X 1-1/4 BATT BOLT & NUT TIN PLATED 			

### EcoMax Battery Ends & Shrink Tubing Assortment

IBS No. 835R • 8 Items • 34 Pcs  
 Packaged in a locking steel drawer for easy storage and organization



IBS, Inc. SPECIALTY PRODUCTS FOR MANUFACTURING & SERVICE INDUSTRIALBOLT.COM © I.D. 800-878-1808		Eco-Max Battery Ends & Shrink Tubing	
Assortment No. 835R			
BAL1038 1/0 X 3/8ST HVY DUTY TUBULAR 	BAL2038 2/0 X 3/8ST HVY DUTY TUBULAR 	B3405 2-4/0GA X 6" RED HVY WALL 	B3505 2-4/0GA X 6" BLACK HVY 
E2110 ECOMAX BATT TERM 1/0 GA POS 	E2112 ECOMAX BATT TERM 2/0 GA POS 		
E2109 ECOMAX BATT TERM 1/0 GA NEG 	E2111 ECOMAX BATT TERM 2/0 GA NEG 		

### EcoMax Post Top Battery Terminals Assortment

IBS No. 129P • 17 Items • 69 Pcs  
 Packaged in a locking steel drawer for easy storage and organization



IBS, Inc. SPECIALTY PRODUCTS FOR MANUFACTURING & SERVICE INDUSTRIALBOLT.COM © I.D. 800-878-1808		ECOMAX Post Top Battery Terminals		
Assortment No. 129P				
E2107 ECOMAX BATT TERM 1+2 GA NEG 	E2111 ECOMAX BATT. TERM 2/0 GA. NEG. 	E2309 ECOMAX BATT. TERM. RT. EL. 1/0 NEG. 		B1110 5/16 X 1-1/4 TIN PLTD BATT 
E2108 ECOMAX BATTERY TERM 1-2 GA POSITIVE 	E2112 ECOMAX BATT. TERM. 2/0 GA. POS. 	E2310 ECOMAX BATT. TERM. RT. EL. 1/0 POS. 		
E2109 ECOMAX BATT TERM 1/0 GA NEG 	E2113 ECOMAX BATT. TERM. 3/0 GA. NEG. 	E2311 ECOMAX BATT. TERM. RT. EL. 2/0 NEG. 	E2411 ECOMAX BATT. TERM. LT. EL. 2/0 NEG. 	E2211 ECOMAX BATT. TERM. FLAG 2/0 NEG. 
E2110 ECOMAX BATT TERM 1/0 GA POS 	E2114 ECOMAX BATT. TERM. 3/0 GA. POS. 	E2312 ECOMAX BATT. TERM. RT. EL. 2/0 POS. 	E2412 ECOMAX BATT. TERM. LT. EL. 2/0 POS. 	E2212 ECOMAX BATT. TERM. FLAG 2/0 POS. 

ELECTRICAL



### Stud Top / Side Mount Terminals

- Stackable—Allows maximum use of threads and more than one terminal to share a common stud.
- Maintenance Free
- Tin Plated
- Universal Polarity



#### STRAIGHT CLAMP TERMINAL

IBS No.	Cable GA	Die Code		Qty
		Color	Letter	
B2607	1 GA	Pink	H-H	5
B2609	1/0	Pink	E-A	5
B2611	2/0	Orange	A-C	5
B2613	3/0	Purple	A-B	5



#### DOUBLE BARREL (SPLICE)

IBS No.	Cable GA	Die Code		Qty
		Color	Letter	
B2711	2/0	Orange	A-C	5



B1103



B1104



B1105

#### STUD TOP BATTERY NUTS

IBS No.	Color	Type	Polarity	Qty
B1103	Black	Synthetic	Negative	10
B1104	Red	Synthetic	Positive	10
B1105	Gray	Stainless	Universal	10



B1101



B1102

#### BATTERY SIDE TERMINAL BOLTS

IBS No.	Description	Qty
B1101	3/8-16 X 1-1/8 Side Term Bolt	10
B1101L	3/8-16 X 1-3/4 Side Term Bolt	10
B1102	3/8-16 X 1-1/2 Side Term Bolt	10


E  
L  
E  
C  
T  
R  
I  
C  
A  
L



### Fusion™ Solder-On Battery Terminals

Fusion™ Connectors come ready-to-use. The correctly engineered flux and solder is precisely pre-measured and loaded in a solderable tin plated connector. Fusion™ strength is twice that of typical crimp or compression connectors.


- Stronger than crimp connectors, twice as thick as industry standards. All clamps, lugs and fasteners are tin plated.
- All clamps include tin plated 5/16" battery bolts and shoulder nuts.
- Faster, less confusing and less costly than multi-component solder slug systems.

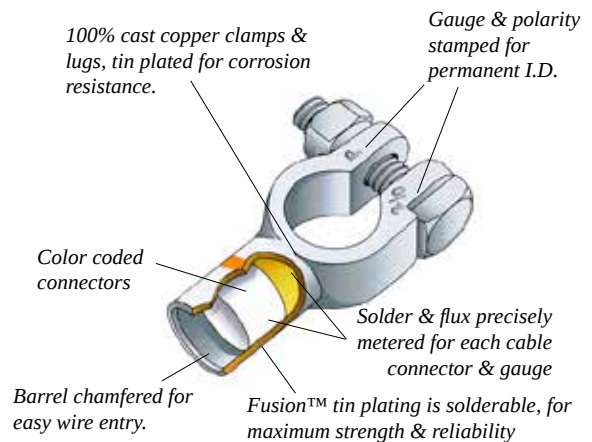

### The Latest Innovation in Corrosion Protection

#### Quality Results with Every Application

- Long term reliability saves time and money.
- Complete, engineered system, includes copper connector, solderable tin plating, flux and solder.
- Easy for inexperienced users, saves time and money.

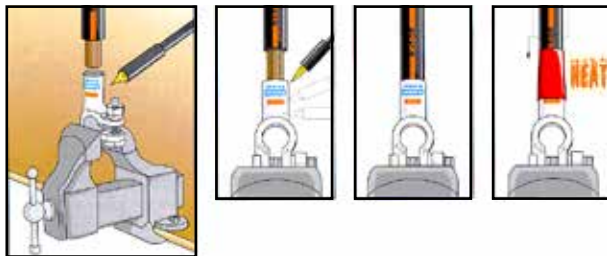

Secure connector in vise, apply heat, insert wire, allow to cool, install heat shrink tubing.

**FAST, CONVENIENT, CONSISTENT QUALITY.**



#### FUSION™ STRAIGHT CLAMP TERMINAL

IBS No.	Cable GA	Polarity	Color	Qty
B2117	4-6 GA	Neg	Grey	5
B21171	4-6 GA	Pos	Grey	5
B2118	1-2 GA	Neg	Pink	5
B2119	1-2GA	Pos	Pink	5
B2120	1/0	Neg	Black	5
B2121	1/0	Pos	Black	5
B2122	2/0	Neg	Orange	5
B2123	2/0	Pos	Orange	5
B2124	3/0	Neg	Purple	5
B2125	3/0	Pos	Purple	5
B2126	4/0	Neg	Yellow	5
B2127	4/0	Pos	Yellow	5



#### FUSION™ RIGHT CLAMP TERMINAL

IBS No.	Cable GA	Polarity	Color	Qty
B2128	1-2 GA	Neg	Pink	5
B2129	1-2GA	Pos	Pink	5
B2130	1/0	Neg	Black	5
B2131	1/0	Pos	Black	5
B2132	2/0	Neg	Orange	5
B2133	2/0	Pos	Orange	5
B2134	3/0	Neg	Purple	5
B2135	3/0	Pos	Purple	5
B2136	4/0	Neg	Yellow	5
B2137	4/0	Pos	Yellow	5

ELECTRICAL



# IBS, INCORPORATED

## Battery Terminals Q02

### FUSION™ Flag



IBS No.	Cable GA	Polarity	Color	Qty
B2148	1-2 GA	Neg	Pink	5
B2149	1-2GA	Pos	Pink	5
B2150	1/0	Neg	Black	5
B2151	1/0	Pos	Black	5
B2152	2/0	Neg	Orange	5
B2153	2/0	Pos	Orange	5
B2154	3/0	Neg	Purple	5
B2155	3/0	Pos	Purple	5
B2156	4/0	Neg	Yellow	5
B2157	4/0	Pos	Yellow	5



### FUSION™ HEAVY WALL LUGS (Q09)

IBS No.	Cable GA	Size	Color	Qty
B00381	4-6 GA	3/8	Grey	5
B00501	4-6 GA	1/2	Grey	5
B01381	1-2 GA	3/8	Pink	5
B01501	1-2GA	1/2	Pink	5
B11381	1/0	3/8	Black	5
B11501	1/0	1/2	Black	5
B21381	2/0	3/8	Orange	5
B21501	2/0	1/2	Orange	5
B31381	3/0	3/8	Purple	5
B31501	3/0	1/2	Purple	5
B41381	4/0	3/8	Yellow	5
B41501	4/0	1/2	Yellow	5

ELECTRICAL

## Fusion Solder-On Battery Ends & Shrink Tubing Assortment

IBS No. 296P • 8 Items • 34 Pcs

Packaged in a locking steel drawer for easy storage and organization



**IBS, Inc.**  
SPECIALTY PRODUCTS FOR MAINTENANCE & REPAIR  
INDUSTRIALBOLT.COM • P.O. BOX 470-1000

FUSION™ Solder-On  
Battery Ends & Shrink Tubing

Assortment No. 296P

<p>B11381 1/0 X 3/8 FUSION HVY WALL LUG</p>	<p>B21381 2/0 X 3/8 FUSION HVY WALL LUG</p>	<p>B3405 2-4/0GA X 6" RED HVY WALL</p>	<p>B3805 2-4/0GA X 6" BLACK HVY</p>
<p>B2121 1/0 POS STRT FUSION BATTERY</p>	<p>B2123 2/0 POS STRT FUSION BATTERY</p>		
<p>B2120 1/0 NEG STRT FUSION BATTERY</p>	<p>B2122 2/0 NEG STRT FUSION BATTERY</p>		

## Fusion Battery Ends Assortment (Z02)

IBS No. 387R • 12 Items • 22 Pcs

Packaged in a locking steel drawer for easy storage and organization



**IBS, Inc.**  
SPECIALTY PRODUCTS FOR MAINTENANCE & REPAIR  
INDUSTRIALBOLT.COM • P.O. BOX 470-1000

Fusion Battery Ends

Assortment No. 387R

<p>B2117 4-6GA NEG STRT FUSION BATTERY</p>	<p>B21171 4-6GA POS STRT FUSION BATTERY</p>	<p>B2118 1-2GA NEG STRT FUSION BATTERY</p>	<p>B2119 1-2GA POS STRT FUSION BATTERY</p>
<p>B2120 1/0 NEG STRT FUSION BATTERY</p>	<p>B2121 1/0 POS STRT FUSION BATTERY</p>	<p>B2122 2/0 NEG STRT FUSION BATTERY</p>	<p>B2123 2/0 POS STRT FUSION BATTERY</p>
<p>B2124 3/0 NEG STRT FUSION BATTERY</p>	<p>B2125 3/0 POS STRT FUSION BATTERY</p>	<p>B2126 4/0 NEG STRT FUSION BATTERY</p>	<p>B2127 4/0 POS STRT FUSION BATTERY</p>



### Battery Terminals



#### HEAVY DUTY UNIVERSAL TERMINAL

IBS No.	Cable GA	Polarity	Qty
N7000	2/0-4/0	Neg or Pos	5



#### AUTOMOTIVE SERIES EMERGENCY STYLE BATTERY TERMINALS

IBS No.	Cable GA	Polarity	Color	Qty
133333	4GA - 1/0	Negative	Black	5
133332	4GA - 1/0	Positive	Red	5
133334	Universal	Universal	Zinc	5



#### MARINE WING NUT STYLE BATTERY TERMINALS



IBS No.	Cable GA	Stud	Polarity	Color	Qty
133336	4GA-1/0	5/16"	Negative	Black	5
133335	4GA-1/0	3/8"	Positive	Red	5

### Military Spec Battery Terminals

These battery terminal adapters are used for mounting electrical leads to battery terminals on industrial lift trucks, tractor trucks, off road vehicles and many military applications for the U.S. Army, Navy, Marines and Coast Guard. The basic shape style is for A26 battery posts. Mil spec battery terminals feature a thick lead body and 3/8" bolt to attach to any accessory needed. Both bolts are reversible to allow for easier installation.



IBS No.	Description	Polarity	Qty
133529	Military Battery End	Negative	5
133530	Military Battery End	Positive	5

### OEM Style Battery Terminals

- Ideal replacement for all light & medium duty.
- Zinc-plated copper alloy.
- Ribbed barrel for added wire gripping.



IBS No.	Cable GA	Polarity	Qty
133329	8-6 GA	Negative	5
133328	8-6 GA	Positive	5
133331	4, 2 & 1 GA	Negative	5
133330	4, 2 & 1 GA	Positive	5

### Battery Converters



#### Side Terminal to Post Conversion (Male Thread)

- Converts side terminal to side post.
- Polarity specific.




#### Post Top to Side Terminal

- Converts post top to side terminal.
- Polarity specific.
- With steel insert.
- Fasteners included.

IBS No.	Description	Qty
133338	Side Terminal Post Set Positive & Negative (5 sets = 10 pcs)	5
133339	Side Terminal Adapter Set Positive & Negative (5 sets = 10 pcs)	5

### Accessory Bolts

- Connect accessories directly to your battery. Ideal for radios, lights, winches, stereo systems, hydraulic pumps — any accessory that requires direct connection to the battery.
- Adapters made of solid brass.



IBS No.	Description	Qty
B6007	3/8 Side Terminal Accessory Bolt replaces regular S/T bolt and has 5/16-18 x 1/2" stud for accessory wires.	10
B6024	Adapter nut replaces regular 5/16" shoulder nut on top post clamps and has 5/16-18 x 3/4 stud for accessory wires.	10

### Battery Nuts & Bolts

- Tin Plated
- Sold by the package (25 Nuts, 25 bolts)



IBS No.	Description	Qty
B1110	5/16-18 x 1-1/4 (25 Nuts, 25 Bolts)	25



# IBS, INCORPORATED

## Battery Terminals Q02

### Cable Slugs

Cable slugs provide a fast, easy and environmentally sealed method to complete battery connections of all types. Cable slugs are available in seven sizes and are color coded for wire range from 4 GA to 4/0. Flux is packed in 2 oz. jars to provide easy application to the cable.























- No crimp tools required.
- Minimal risk of insulation puncture.
- Environmental seal of insulator to wire prevents dielectric leakage and damage to splice by corrosive environments.
- Bonded insulation provides optimum mechanical strain relief.
- Minimal training and operator skill required to achieve correct results.

IBS No.	Size	Color	Qty
B400	4 GA	Grey	10
B200	2 GA	Green	10
B100	1 GA	Pink	10
B1010	1/0 GA	Black	10
B2010	2/0 GA	Orange	10
B3010	3/0 GA	Purple	10
B4010	4/0 GA	Yellow	10
B500	2 oz	Flux	1

### Special Battery Ends Assortment

IBS No. 642P • 19 Items 52 Pcs

Packaged in a locking steel drawer for easy storage and organization

 <b>Special Battery Ends</b>				Assortment No. 642P	
<b>133328</b> 8-6GA OEM POSITIVE BATTERY END 	<b>N7000</b> HVY DUTY TOP MOUNT BATT TERM 	<b>133338</b> POST TO SIDE MNT BATTERY END 	<b>133335</b> MARINE WING NUT BATTERY END 	<b>133336</b> MARINE WING NUT BATTERY END 	
<b>133329</b> 8-6GA OEM NEGATIVE BATTERY END 	<b>133332</b> AUTOMOTIVE EMERGENCY POS. 	<b>133338</b> POST TO SIDE MNT BATTERY END 	<b>B6007</b> SIDE MNT BATTERY ACC. BOLT 	<b>B6024</b> TOP MNT BATTERY ACC. BOLT 	
<b>133330</b> 4,2&1GA OEM POSITIVE BATTERY 	<b>133333</b> AUTOMOTIVE EMERGENCY NEG. 	<b>133339</b> SIDE MNT TO POST TOP BATT. 	<b>B1101</b> SIDE MOUNT BATT BOLT OEM 	<b>B1102</b> SIDE MOUNT BATT BOLT EX LONG 	
<b>133331</b> 4,2&1GA OEM NEGATIVE BATTERY 	<b>133334</b> AUTOMOTIVE SIDE MNT EMERG 	<b>133339</b> SIDE MNT TO POST TOP BATT. 	<b>B1110</b> 5/16 X 1-1/4 BATT BOLT & NUT TIN PLATED 		

ELECTRICAL

### Battery End Power Cleaning Brushes (T03)

These brushes remove and polish corroded battery posts to ensure optimal conductivity. Brushes fit easily and securely in any electric, cordless or pneumatic drill.

- Cleans & polishes up to 1,000 battery posts.
- Heavy duty injected molded housing.
- Resilient steel bristles.
- Accepts 1/4" hex shank. Fits all drills or cordless screwdrivers.
- Acceptable RPM rating between 400-800




4-in-1 Tube Fitting Brush

Marine

IBS No.	Description	Qty
133343	Marine Power Brush	1
44690	4-in-1 Tube Fitting Brush	1

### Terminal Protectors (Q02)

- For Post Top Terminals
- Prevents corrosion build-up.
- Prolongs battery life.
- Provides full starting power.
- Sold Each by Can  
(1 can contains 100 protectors)

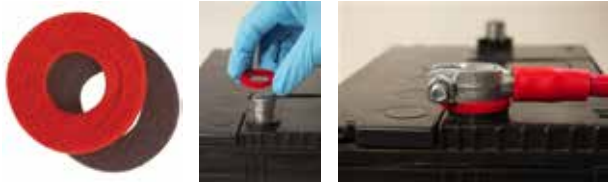

IBS No.	Description	Qty
643TP	Terminal Protectors (100 per can)	1

### Heavy Duty Lugs

- Extra heavy duty thick copper for greater conductivity.
- Identification marked for cable size, color and letter code.
- Thicker tongue and raised barrel to resist vibration.
- Superior height to conventional lugs & splices.
- Longer barrel for improved crimping.
- 100% tin plating.
- Resists cracking.



IBS No.	Cable GA	Stud	Qty
BAL0138	1-2 GA	3/8	5
BAL0112	1-2 GA	1/2	5
BAL1038	1/0	3/8	5
BAL1012	1/0	1/2	5
BAL2038	2/0	3/8	5
BAL2012	2/0	1/2	5
BAL3038	3/0	3/8	5
BAL3012	3/0	1/2	5
BAL4038	4/0	3/8	5
BAL4012	4/0	1/2	5

### Splices

#### Standard

Flared opening for easy cable insertion.  
Made electrolytic copper, tin plated

#### Heavy Duty

Superior height to conventional splices  
Thicker copper for greater conductivity.  
Crimping tool coding on barrel.  
100% tin plated.



#### STANDARD SPLICES

IBS No.	Cable GA	Qty
B1930	#2	10
B1940	#1	10
B1950	1/0	10
B1960	2/0	10
B1970	3/0	10

#### HEAVY DUTY SPLICES

IBS No.	Cable GA	Qty
MS1	1 GA	5
MS100	1/0	5
MS200	2/0	5
MS300	3/0	5
MS400	4/0	5

ELECTRICAL





# IBS, INCORPORATED

## Tubular Lugs Q09

### Copper Tubular Lugs



- Flared and chamfered barrel facilitates cable insertion.
- Made of 100% electrolytic copper.
- Lugs can be crimped or soldered.
- Gauge is stamped on lug for easy identification.

IBS No.	Cable GA	Stud	Qty	IBS No.	Cable GA	Stud	Qty
B8101	8 GA	#10	10				
B8141	8 GA	1/4	10	B1143	1 GA	1/4	10
B8561	8 GA	5/16	10	B1561	1 GA	5/16	10
B8383	8 GA	3/8	10	B1381	1 GA	3/8	10
B8503	8 GA	1/2	10	B1501	1 GA	1/2	10
B6101	6 GA	#10	10				
B6141	6 GA	1/4	10	B10141	1/0 GA	1/4	10
B6561	6 GA	5/16	10	B10516	1/0 GA	5/16	10
B6583	6 GA	3/8	10	B10381	1/0 GA	3/8	10
B6503	6 GA	1/2	10	B10501	1/0 GA	1/2	10
B4101	4 GA	#10	10				
B4141	4 GA	1/4	10	B20141	2/0 GA	1/4	10
B4561	4 GA	5/16	10	B20516	2/0 GA	5/16	10
B4381	4 GA	3/8	10	B20381	2/0 GA	3/8	10
B4503	4 GA	1/2	10	B20501	2/0 GA	1/2	10
B2141	2 GA	1/4	10	B30381	3/0 GA	3/8	10
B2561	2 GA	5/16	10	B30501	3/0 GA	1/2	10
B2381	2 GA	3/8	10	B40381	4/0 GA	3/8	10
B2503	2 GA	1/2	10	B40501	4/0 GA	1/2	10

### Copper Tubular Lugs Assortment (Z02)

IBS No. 755R • 24 Items • 120 Pcs

Packaged in a locking steel drawer for easy storage and organization



IBS, Inc. SPECIALTY PRODUCTS FOR MAINTENANCE & REPAIR INDUSTRIALBOLT.COM 800-678-1906		Copper Tubular Lugs			
Assortment 755R					
B8101 BATT TERM #8AWG #10 STUD LUG	B6101 BATT TERM #6AWG #10 STUD LUG	B4141 BATT TERM #4AWG 1/4 STUD LUG	B2381 BATT TERM #2AWG 3/8 STUD LUG	B10381 BATT TERM 1/0AWG 3/8 STUD LUG	B30381 BATT TERM 3/0AWG 3/8 STUD LUG
B8141 BATT TERM #8AWG 1/4 STUD LUG	B6141 BATT TERM #6AWG 1/4 STUD LUG	B4561 BATT TERM #4AWG 5/16 STUD LUG	B2503 BATT TERM #2AWG 1/2 STUD LUG	B10501 BATT TERM 1/0AWG 1/2 STUD LUG	B30501 BATT TERM 3/0AWG 1/2 STUD LUG
B8561 BATT TERM #8AWG 5/16 STUD LUG	B6561 BATT TERM #6AWG 5/16 STUD LUG	B4381 BATT TERM #4AWG 3/8 STUD LUG	B1381 BATT TERM #1AWG 3/8 STUD LUG	B20381 BATT TERM 2/0AWG 3/8 STUD LUG	B40381 BATT TERM 4/0AWG 3/8 STUD LUG
B8383 BATT TERM #8AWG 3/8 STUD LUG	B6583 BATT TERM #6AWG 3/8 STUD LUG	B4503 BATT TERM #4AWG 1/2 STUD LUG	B1501 BATT TERM #1AWG 1/2 STUD LUG	B20501 BATT TERM 2/0AWG 1/2 STUD LUG	B40501 BATT TERM 4/0AWG 1/2 STUD LUG



### Tin Plated Copper Tubular Lugs



- Flared and chamfered barrel facilitates cable insertion.
- Tin plated copper lugs reduce corrosion caused by harsh environments.
- May be soldered or crimped and are burr-free for a finished, professional look.
- UL Listed/CSA Certified.

IBS No.	Cable GA	Stud	Qty	IBS No.	Cable GA	Stud	Qty
B8101P	8 GA	#10	10				
B8141P	8 GA	1/4	10	B1143P	1 GA	1/4	10
B8561P	8 GA	5/16	10	B1561P	1 GA	5/16	10
B8383P	8 GA	3/8	10	B1381P	1 GA	3/8	10
B8503P	8 GA	1/2	10	B1501P	1 GA	1/2	10
B6101P	6 GA	#10	10				
B6141P	6 GA	1/4	10	B10141P	1/0 GA	1/4	10
B6561P	6 GA	5/16	10	B10516P	1/0 GA	5/16	10
B6583P	6 GA	3/8	10	B10381P	1/0 GA	3/8	10
B6503P	6 GA	1/2	10	B10501P	1/0 GA	1/2	10
B4101P	4 GA	#10	10				
B4141P	4 GA	1/4	10	B20141P	2/0 GA	1/4	10
B4561P	4 GA	5/16	10	B20516P	2/0 GA	5/16	10
B4381P	4 GA	3/8	10	B20381P	2/0 GA	3/8	10
B4503P	4 GA	1/2	10	B20501P	2/0 GA	1/2	10
B2141P	2 GA	1/4	10	B30381P	3/0 GA	3/8	10
B2561P	2 GA	5/16	10	B30501P	3/0 GA	1/2	10
B2381P	2 GA	3/8	10	B40381P	4/0 GA	3/8	10
B2503P	2 GA	1/2	10	B40501P	4/0 GA	1/2	10

### Tin Plated Copper Tubular Lugs Assortment (Z02)

IBS No. 760R • 24 Items • 120 Pcs

Packaged in a locking steel drawer for easy storage and organization

**IBS, Inc.**  
SPECIALTY PRODUCTS FOR MAINTENANCE & REPAIR  
INDUSTRIALBOLTY.COM 800-678-1906

**Tin Plated Copper Tubular Lugs**

Assortment 760R					
B8101P BATT TERM #8AWG #10 STUD LUG 	B6101P BATT TERM #6AWG #10 STUD LUG 	B4141P BATT TERM #4AWG 1/4 STUD LUG 	B2381P BATT TERM #2AWG 3/8 STUD LUG 	B10381P BATT TERM 1/0AWG 3/8 STUD LUG 	B30381P BATT TERM 3/0AWG 3/8 STUD LUG 
B8141P BATT TERM #8AWG 1/4 STUD LUG 	B6141P BATT TERM #6AWG 1/4 STUD LUG 	B4561P BATT TERM #4AWG 5/16 STUD LUG 	B2503P BATT TERM #2AWG 1/2 STUD LUG 	B10501P BATT TERM 1/0AWG 1/2 STUD LUG 	B30501P BATT TERM 3/0AWG 1/2 STUD LUG 
B8561P BATT TERM #8AWG 5/16 STUD LUG 	B6561P BATT TERM #6AWG 5/16 STUD LUG 	B4381P BATT TERM #4AWG 3/8 STUD LUG 	B1381P BATT TERM #1AWG 3/8 STUD LUG 	B20381P BATT TERM 2/0AWG 3/8 STUD LUG 	B40381P BATT TERM 4/0AWG 3/8 STUD LUG 
B8383P BATT TERM #8AWG 3/8 STUD LUG 	B6583P BATT TERM #6AWG 3/8 STUD LUG 	B4503P BATT TERM #4AWG 1/2 STUD LUG 	B1501P BATT TERM #1AWG 1/2 STUD LUG 	B20501P BATT TERM 2/0AWG 1/2 STUD LUG 	B40501P BATT TERM 4/0AWG 1/2 STUD LUG 



### High Capacity Hydraulic Crimper



High Capacity Hydraulic Crimper creates strong medical connections with crisp and sharp corners. The powerful hydraulic action delivers 70kN (15,736 Lbf) of force for secure crimps. This crimper includes 8 hardened steel die sets, and is ideal for battery and welding cables.

- Powerful hydraulic action delivers nominal force of 10 tons for secure crimps.
- Ideal for battery and welding cables.
- Creates strong mechanical connections with crisp and sharp corners.
- Features non-slip handle and ON/OFF retractor knob.
- Includes 8 hardened-steel die sets from #6 to 4/0 AWG.

IBS No.	Description	Qty
141981	High Capacity Hydraulic Crimper	1

### Universal Crimping Tool

#### IBS No. B0283

- **Double Compound Action** effortlessly exerts maximum force for fast, reliable crimps every time.
- **Rotating Dies** accommodate all sizes of battery terminals, lugs, and connectors, eliminating loss or need to store individual dies.
- **Diamond Shape Crimp** compresses all strands together to form a solid mass of copper. This assures a low resistance connection every time.
- **Easy to use reference chart** located on tool eliminates guess work enabling competition products to be crimped accurately.
- **Wire range:** #8 GA through 250 MCM.



#### BATTERY TERMINAL CRIMPING TOOL APPLICATION CHART

AWG No.	Battery Terminals Die Setting				Flared Lugs Die Setting		
	L Die	R Die	Color	# of Crimps	L Die	R Die	# of Crimps
6	NA	NA	NA	NA	M	K	1
4	J	H	Green	1	K	K	1
2	H	H	Pink	2	J	H	1
1	H	H	Pink	2	J	H	
1/0	E	A	Black	2	H	H	
2/0	A	C	Orange	2	E	A	2
3/0	A	B	Purple	2	A	C	
4/0	A	A	Yellow	2	A	B	2

E  
L  
E  
C  
T  
R  
I  
C  
A  
L

### Cable Cutter

**IBS No. B0014**

**Wire Range: 8 GA to 350 mm**

**Length: 24 inches**



### Wire & Cable Cutter

**IBS No. B0012**

**Wire Range: up to 1/0**

**Length: 8-1/2 inches**



### Battery Cable Stripper

**IBS No. B0285**

**Wire Range: 8 GA to 4/0**

**Length: 3-3/4 inches**



### Indent Crimper

**IBS No. B0840**

**Wire Range: 6 GA to 4/0**

**Length: 3-3/4 inches**



### 12 Volt Tester

**IBS No. 0690T**

- Durable, high quality tester.
- Ideal for testing lighting and wiring circuits in auto, truck trailer & marine applications.
- Insulated mini-gator clip for positive contact.
- Sharp pierce point for penetrating all low voltage wiring.
- Bulb replaceable with standard automotive bulb.



### Cable Clamps

**IBS No. N7726**

**Sold in sets of Two**

World's strongest booster cable clamp. Rated at 500 amps. It is the perfect replacement for worn or damaged clamps. Color coded red and black.



### Professional Grade Heavy Duty Booster Cables (Q3F)

**4GA x 20' 400 AMP**

**IBS No. 120765**

- 400 AMP, Color coded clamps.
- Clamps are 100% Epoxy Coated for Safety.
- Tangle-free, twin-line cables.
- Extra Heavy Duty Insulation.
- Pure Copper Conductors.
- Stays flexible down to -30°F/-34°C
- Comes boxed for clean, safe storage.
- Includes convenient storage bag.





# IBS, INCORPORATED

## Nylon Tie Wraps Q04

### Ty-Rap® Black Nylon Cable Tie Wraps with Metal Tabs

#### Heat Stabilized / Ultraviolet Resistant

A **durable, cost-effective bundling solution** designed to be used in **special applications** and in **harsh environmental conditions**. These ties combine **heat stabilizing** and **UV resistant materials** to provide a better match for special applications in both outdoor and **high-temperature** areas (-40°F/-40°C to 221°F/105°C). These ties also provide a smooth, **low-profile look** and offer **unlimited tensioning range** for a perfect fit. The convenience of a single tie for both applications keeps installation time and cost to a minimum. These ties are also **an effective alternative to expensive metallic fasteners**, which are priced higher and take longer to install.




- The **stainless steel locking device in the head** allows these ties to have a smooth body, making them infinitely adjustable within the bundle range.
- **Ideal for Industrial OEM and MRO** (includes, but not limited to industrial, lawn/garden/farming equipment, recreation vehicles, heavy equipment).
- The smooth outer body in comparison with the notched body of regular ties **reduces the stress on the tie for greater strength and improved performance**, especially in cold and dry conditions.
- **Ribbed and textured inner body prevents slippage** on the bundle from inside, keeping the tie in place during and after installation.
- **No slip tail** for easier starting and tightening.
- **Temperature range** (-40°F/-40°C to 221°F/105°C).
- **UL Recognized.**

IBS No.	Length	Strength	Width	MIL SPEC	Qty
104488	3-1/2	18 lbs	.091	MS3367-4	100
104489	5-1/2	30 lbs	.140	MS3367-5	100
104490	7	50 lbs	.187	MS3367-1	100
104491	11	50 lbs	.187	MS3367-7	100
104492	14	50 lbs	.187	MS3367-2	50
104493	13	120 lbs	.270	MS3367-3	50

### Met-Tab Cable Tie Rack Assortment

IBS No. 815R • 5 Items • 400 Pcs

Packaged in a wall mountable steel cable tie rack for easy storage & organization.

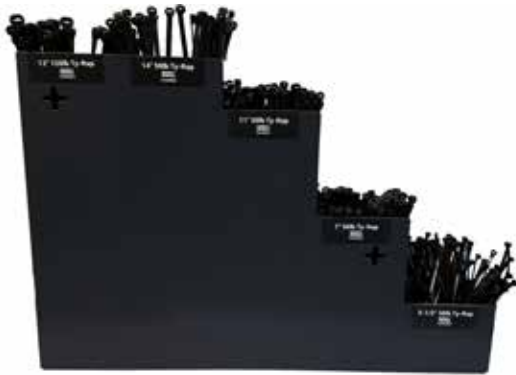

- Cable tie rack features all steel construction.
- Each compartment is supplied with a removable divider to create from 5 to 10 compartments.
- 5 different compartment heights provide storage space for cable ties in multiple lengths.
- Wall mountable.
- Overall diameter: 18-5/32"W X 3D X 12-1/4"H

ELECTRICAL





### Black Nylon Ty-Raps with Metal Tabs Assortment

IBS No. 370R • 7 Items • 251 Pcs

Packaged in a locking steel drawer for easy storage & organization.



### Black Nylon Ty-Raps with Metal Tabs

Assortment No. 370R

104487 MINI CABLE TIE GUN	
104493 13IN 120LB BLACK NYLON TYRAP METAL TAB	
104492 14IN 50LB BLACK NYLON TYRAP METAL TAB	
104491 11IN 50LB BLACK NYLON TYRAP METAL TAB	
104490 7IN 50LB BLACK NYLON TYRAP METAL TAB	
104488 3-1/2 18LB BLACK NYLON TYRAP METAL TAB	
104489 5-1/2 30LB BLACK NYLON TYRAP METAL TAB	

E  
L  
E  
C  
T  
R  
I  
C  
A  
L



# IBS, INCORPORATED

## Nylon Tie Wraps Q04

### Cable Tie Wraps

Cable ties are all nylon and flame retardant, fungus inert, and resistant to solvents, alkalis, and grease. They function normally in service temperatures ranging from -40°F (-40°C) to 185°F (85°C) and can be stored in temperatures down to -85°F (-65°C).

The flexible design of the cable ties allows them to be slipped easily under and around cables and harnesses. The curved tip makes it easier to grasp, position and insert into the head. The raised nibs on the tail allow for temporary holding while the work is being positioned. The tie then locks in place automatically and the excess tail can be snipped off. The cable tie will then stay locked without slipping. No metal barbs.

#### NATURAL NYLON CABLE TIES

IBS No.	Length	Strength	Width	Bundle	Qty
L-4-18	4"	18 lbs	.095	.75"	100
L-5-30	5.5"	40 lbs	.140	1.5"	100
L-7-50	7.5"	50 lbs	.180	2"	100
L-11-50	11"	50 lbs	.180	3"	100
L-14-50	14.5"	50 lbs	.180	4"	100
L-14-120	15"	120 lbs	.300	4"	100
L-8-175	8"	175 lbs	.340	2"	100
L-24-175	24.5"	175 lbs	.340	7"	50
L-32-175	36"	175 lbs	.340	10"	50

#### UV BLACK WEATHER-RESISTANT CABLE TIES

IBS No.	Length	Strength	Width	Bundle	Qty
B-4-18	4"	18 lbs	.095	.75"	100
B-8-18	8"	18 lbs	.095	2"	100
B-5-30	5.5"	40 lbs	.140	1.5"	100
B-7-50	7.5"	50 lbs	.180	2"	100
B-11-50	11"	50 lbs	.180	3"	100
B-14-50	14.5"	50 lbs	.180	4"	100
B-14-120	15"	120 lbs	.300	4"	100
B-8-175	8"	175 lbs	.340	2"	100
B-24-175	24.5"	175 lbs	.340	7"	50
B-32-175	36"	175 lbs	.340	10"	50
B-21-250	22"	250 lbs	.500	6"	100

The shelf life of a nylon Cable Tie Wrap outside of its original packaging is 1 year. The 1 year shelf life begins after the packaging has been opened.

Shelf life of cable ties is a function of the environment in which they are stored.

Perfect storage conditions for a cable tie is 70°F and 50% Relative Humidity packaged in the manufacturer's original sealed bags. Life expectancy under these conditions is well in excess of two years. Shelf life will be reduced by temperature and humidity extremes, as well as by any break in the sealed bag.

Cable ties should be stored in the manufacturer's original packaging until ready for use.

Cable ties should be used within one year of purchase.

Partial Cable tie bags should be closed or sealed if at all possible.

Cable ties should not be over tensioned when installed (Over-tensioning actually weakens the tie).

E  
L  
E  
C  
T  
R  
I  
C  
A  
L



### Nylon Cable Tie Wraps

#### Assortment

**IBS No. 107R • 10 Items • 750 Pcs**

Packaged in a locking steel drawer for easy storage & organization.



IBS, Inc. SPECIALTY PRODUCTS FOR MAINTENANCE & SERVICE INDUSTRIALMARKET.COM © IBS 800-878-1008		Nylon Tie Wraps	
Assortment No. 107R			
15' 120lb. Black Nylon Tie B-14-120			
14-1/2' 50 lb. Black Nylon Tie B-14-50			
4' 18 lb. Black Nylon Tie B-4-18		11' 50 lb. Black Nylon Tie B-11-50	
7-1/2' 50 lb. Clear Nylon Tie L-7-50		8' 50 lb. Mounting Tie MH-7-50	
5-1/2' 40 lb. Clear Nylon Tie L-5-30		7-1/2' 50 lb. Black Nylon Tie B-7-50	
4' 18 lb. Clear Nylon Tie L-4-18		5-1/2' 40 lb. Black Nylon Tie B-5-30	

### Standard Cable Tie Wraps Asst.

**IBS No. 724R • 6 Items • 600 Pcs**

Packaged in a locking steel drawer for easy storage & organization.



IBS, Inc. SPECIALTY PRODUCTS FOR MAINTENANCE & SERVICE INDUSTRIALMARKET.COM © IBS 800-878-1008		Standard Cable Tie Wraps	
Assortment No. 724R			
L-4-18 4 18LB NATURAL NYLON TIE'		L-5-30 5-1/2 30LB NATURAL NYLON TIE'	
L-7-50 7 50LB NATURAL NYLON TIE'			
L-11-50 11 50LB NATURAL NYLON TIE'			
L-14-50 14 50LB NATURAL NYLON TIE'			
L-14-120 14 120LB NATURAL NYLON TIE'			
L-14-120 14 120LB NATURAL NYLON TIE'			

### Weather-Resistant Cable Tie Wraps Assortment

**IBS No. 725R • 6 Items • 600 Pcs**

Packaged in a locking steel drawer for easy storage & organization.




IBS, Inc. SPECIALTY PRODUCTS FOR MAINTENANCE & SERVICE INDUSTRIALMARKET.COM © IBS 800-878-1008		Weather Resistant Cable Tie Wraps	
Assortment No. 725R			
B-4-18 4 18LB BLACK NYLON TIE'		B-5-30 5 30LB BLACK NYLON TIE'	
B-7-50 7 50LB BLACK NYLON TIE'			
B-11-50 11 50LB BLACK NYLON TIE'			
B-14-50 14 BLACK NYLON TIE'			
B-14-120 14 120LB BLACK NYLON TIE'			
B-14-120 14 120LB BLACK NYLON TIE'			

### Cable Tie Rack Assortment

**IBS No. 814R • 5 Items • 500 Pcs**

Packaged in a wall mountable steel cable tie rack for easy storage & organization.

- Cable tie rack features all steel construction.
- Each compartment is supplied with a removable divider to create from 5 to 10 compartments.
- 5 different compartment heights provide storage space for cable ties in multiple lengths.
- Wall mountable.
- Overall diameter: 18-5/32"W X 3D X 12-1/4"H

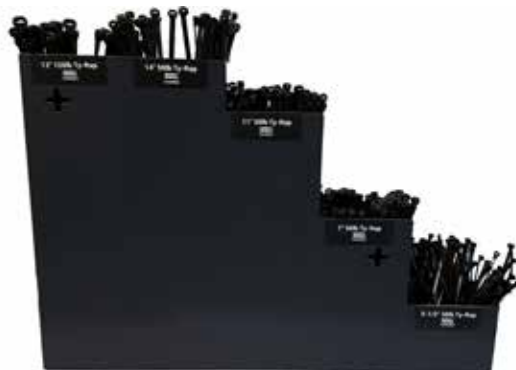

ELECTRICAL



# IBS, INCORPORATED

## Nylon Tie Wraps Q04

### Black Low Profile Cable Tie Wraps

In some areas and applications a standard tie can be a real nuisance, snagging or catching on materials around it, or even taking up more space than needed or wanted. Standard ties can also create a safety hazard with sharp edges where the tang was cut off.

Low Profile Tie Wraps provide a solution to these problems. Made in the USA., this tie is the lowest profile nylon tie on the market and offers superior tensile strength and robust quality that stand up well in a wide range of environments. Safer than a traditional tie because of its smooth, snag proof contour with no barbs or spikes to injure and installer, technician, or end user.

#### FEATURES & BENEFITS

- Lowest profile nylon tie available offering exceptional functionality, strength and safety.
- Flexible head design easily flexes around tubing or bundled wiring enhancing the visual appeal of your finished product by fitting closely and snugly to the material being wrapped.
- Tamper-proof pawl located under the tie's head offers additional safety and security.
- Leftover strap conveniently slips back into the head, leaving no sharp cutoffs or exposed edges to injure the installer, technician, or end user.
- Made in the USA.
- RoHS and UL compliant.



#### BLACK LOW PROFILE CABLE TIE WRAPS

IBS No.	Length	Strength	Width	Bundle	Qty
BLP-7-50	7.5"	50 lbs	.17	1-3/4"	100
BLP-11-50	11"	50 lbs	.17	3"	100
BLP-14-50	14"	50 lbs	.17	4"	100
BLP-14-120	14"	120 lbs	.30	4"	100

### Black Low Profile Cable Tie Wraps Assortment

IBS No. 796R • 8 Items • 700 Pcs

Packaged in a locking steel drawer for easy storage & organization.



**Low Profile and Releasable Cable Tie Wraps**

Assortment No. 796R

<b>BLP-14-120</b> 14IN 120LB BLACK NYLON LOW PROFILE TIE WRAP	
<b>BLP-14-50</b> 14IN 50LB BLACK NYLON LOW PROFILE TIE WRAP	
<b>RB-S-50</b> 5 50LB BLACK RELEASABLE NYLON™ TIE WRAP	<b>BLP-11-50</b> 11IN 50LB BLACK NYLON LOW PROFILE TIE WRAP
<b>RB-8-50</b> 8 50LB BLACK RELEASABLE NYLON™ TIE WRAP	<b>BLP-7-50</b> 7IN 50LB BLACK NYLON LOW PROFILE TIE WRAP
<b>RB-12-50</b> 12 50LB BLACK RELEASABLE™ NYLON TIE WRAP	
<b>RB-14-50</b> 14 50LB BLACK RELEASABLE™ NYLON TIE WRAP	

ELECTRICAL



### UV Black Weather-Resistant Releasable Cable Tie Wraps

Ideal for use in applications where there is a need to repeatedly open and close the tie.



IBS No.	Length	Strength	Width	Bundle	Qty
RB-5-50	5"	50 lbs	.290	1.5"	100
RB-8-50	8"	50 lbs	.290	2"	100
RB-12-50	12"	50 lbs	.290	3"	100
RB-14-50	14"	50 lbs	.180	4"	100



### Nylon Speedy Ties (Q04) Reusable Tie Wrap

A fully re-usable, easily releasable lashing tie. The Speedy-Tie's unique design allows it to be released with one hand.



**Features:**

- Just one click to tie and untie
- Fully re-usable
- Once applied, the tail can be neatly tucked away for added safety
- Highly visible yellow color
- Versatile design allows for multiple applications

**Used for and by:**

- Electrical contractors
- Heating and ventilation contractors
- Residential construction
- General and heavy industry
- Packaging
- Tubing and pipe bundling
- Overhead installations
- In-plant transfer of products

IBS No.	Length		MIN Tensile Strength		Width		MAX Bundle		Operating Temperature	Qty
	in.	(mm)	lbs	(N)	in.	(mm)	in.	(mm)		
141146	29.52	(750)	200 lbs	(888)	.51	(13)	8.27	(210)	-40°F to 185° F CONTINUOUS	10

### Releasable Cable Tie Wraps Assortment (Z02)

IBS No. 726R • 5 Items • 310 Pcs

Packaged in a locking steel drawer for easy storage & organization.



**Releasable Cable Tie Wraps**

Assortment No. 726R

RB-5-50 5" 50LB BLACK RELEASABLE NYLON TIE	
RB-8-50 8" 50LB BLACK RELEASABLE NYLON TIE	
RB-12-50 12" 50LB BLACK RELEASABLE NYLON TIE	
RB-14-50 14" 50LB BLACK RELEASABLE NYLON TIE	
141146 29.5 200# YELLOW NYLON	






# IBS, INCORPORATED

## Nylon Tie Wraps Q04

### Colored & Fluorescent Cable Tie Wraps

Fluorescent nylon cable tie wraps feature the same design characteristics as the standard cable ties, but are available in highly visible fluorescent colors. Ideal for color coding wire bundles by usage or application.

ELECTRICAL

	IBS No.	Length	Strength	Color	Qty
	BL-4-18	4"	18 lbs.	Blue	100
	R-4-18	4"	18 lbs.	Red	100
	Y-4-18	4"	18 lbs.	Fluorescent Yellow	100
	BL-7-50	7"	50 lbs.	Blue	100
	BR-7-50	7"	50 lbs.	Brown	100
	GY-7-50	7"	50 lbs.	Gray	100
	GR-7-50	7"	50 lbs.	Green	100
	P-7-50	7"	50 lbs.	Purple	10
	R-7-50	7"	50 lbs.	Red	100
	Y-7-50	7"	50 lbs.	Yellow	100
	FB-7-50	7"	50 lbs.	Fluorescent Blue	100
	FG-7-50	7"	50 lbs.	Fluorescent Green	100
	FO-7-50	7"	50 lbs.	Fluorescent Orange	100
	FP-7-50	7"	50 lbs.	Fluorescent Pink	100
	FY-7-50	7"	50 lbs.	Fluorescent Yellow	100
	TW4	4"	18 lbs.	25 Pcs. Each of the following: White, Black, Yellow, Red & Blue	1
	TW7	7"	50 lbs.	25 Pcs. Each of the following: Blue, Brown, Gray, Green, Purple, Red, Yellow	1
	TW7FL	7"	50 lbs.	25 Pcs. Each of the following: White, Black, FL Yellow, FL Green, FL Blue, FL Orange, FL Pink	1

# IBS, INCORPORATED

## Assortments Z02



### Colored Cable Tie Wraps Assortment

IBS No. 710R • 12 Items • 1200 Pcs

Packaged in a locking steel drawer for easy storage & organization



<b>IBS, Inc.</b> <small>SPECIALTY PRODUCTS FOR MAINTENANCE &amp; REPAIR          INDUSTRIALBOLT.COM • 800-678-1906</small>		<b>Colored Cable Tie Wraps</b> Assortment No. 710R
<b>BL-4-18</b> 4" 18LB BLUE NYLON TIE 	<b>R-4-18</b> 4" 18LB RED NYLON TIE 	
<b>Y-4-18</b> 4" 18LB FLOURESCENT YELLOW NYLON TIE 	<b>L-4-18</b> 4" 18LB NATURAL NYLON TIE 	
<b>B-7-50</b> 7" 50LB BLACK NYLON TIE 	<b>B-4-18</b> 4" 18LB BLACK NYLON TIE 	
<b>FB-7-50</b> 7" 50LB FLOURESCENT BLUE NYLON TIE 	<b>L-7-50</b> 7" 50LB NATURAL NYLON TIE 	
<b>FO-7-50</b> 7" 50LB FLOURESCENT ORANGE NYLON TIE 	<b>FG-7-50</b> 7" 50LB FLOURESCENT GREEN NYLON TIE 	
<b>FY-7-50</b> 7" 50LB FLOURESCENT YELLOW NYLON TIE 	<b>FP-7-50</b> 7" 50LB FLOURESCENT PINK NYLON TIE 	

### 8" Colored Cable Tie Wraps Assortment

IBS No. 786R • 12 Items • 1200 Pcs

Packaged in a locking steel drawer for easy storage & organization



<b>IBS, Inc.</b> <small>SPECIALTY PRODUCTS FOR MAINTENANCE &amp; REPAIR          INDUSTRIALBOLT.COM • 800-678-1906</small>		<b>7" Colored Cable Tie Wraps</b> Assortment No. 786R
<b>BL-7-50</b> 7" 50LB BLUE NYLON TIE 	<b>GY-7-50</b> 7" 50LB GRAY NYLON TIE 	
<b>Y-7-50</b> 7" 50LB YELLOW NYLON TIE 	<b>GR-7-50</b> 7" 50LB GREEN NYLON TIE 	
<b>R-7-50</b> 7" 50LB RED NYLON TIE 	<b>P-7-50</b> 7" 50LB PURPLE NYLON TIE 	
<b>BR-7-50</b> 7" 50LB BROWN NYLON TIE 	<b>FO-7-50</b> 7" 50LB FLOURESCENT ORANGE NYLON TIE 	
<b>FB-7-50</b> 7" 50LB FLOURESCENT BLUE NYLON TIE 	<b>FP-7-50</b> 7" 50LB FLOURESCENT PINK NYLON TIE 	
<b>FY-7-50</b> 7" 50LB FLOURESCENT YELLOW NYLON TIE 	<b>FG-7-50</b> 7" 50LB FLOURESCENT GREEN NYLON TIE 	

ELECTRICAL



# IBS, INCORPORATED

## Nylon Tie Wraps Q04

### Push Mount Cable Ties

These cable ties snap quickly into a 1/4" hole to provide one-piece bundling and mounting. The push-mount head is ideal for mounting on panels or chassis. Centering ears and locking barbs hold securely and spring arm thickness compensators tighten in panel chassis up to 1/8" thick. Bundling can be done either before or after mounting. Injection molded for maximum strength.




#### UV BLACK WEATHER-RESISTANT PUSH MOUNTING CABLE TIES

IBS No.	Length	Strength	Width	Bundle	Qty
PMB-8-50	8"	50 lbs	.190	2"	100

### Buttonhead Cable Ties

Buttonhead ties are of two piece construction designed to mount the tie on a panel or structural framework. The strap can be inserted into the head in either direction to speed installation. Black nylon construction.



#### UV BLACK WEATHER-RESISTANT BUTTONHEAD CABLE TIES

IBS No.	Length	Strength	Width	Bundle	Qty
BH-10-100	9-5/8"	100 lbs	.22	2.62"	50

### Screw Mount Cable Ties

Screw mount cable ties have a built-in mounting hole. Once fastened around a bundle they can simply be secured with a screw or bolt.



#### NATURAL SCREW MOUNT CABLE TIES

IBS No.	Length	Strength	Width	Bundle	Mounts with	Qty
MH-7-50	8"	50 lbs	.18	2"	#10 screw	100
MH-14-50	15"	50 lbs	.18	4"	#10 screw	100
MH-14-120	15"	120 lbs	.30	4"	1/4" screw	100



#### UV BLACK WEATHER-RESISTANT SCREW MOUNT CABLE TIES

IBS No.	Length	Strength	Width	Bundle	Mounts with	Qty
MBH-7-50	8"	50 lbs	.18	2"	#10 screw	100

### Stud Mount Cable Tie Wrap

This tie is made to easily mount to the top of a stud. With the additional height gained by this design, it allows the wire bundle added clearance from the panel or wherever it is being used.

- The standoff design can be mounted onto screws or studs to mount and secure bundles in one component providing quick installation time — saving time and money.
- Serrated stand-off has "soft-push" technology, meaning the standoff slides onto the stud easily and the serrations bite onto the stud for a secure bundle that saves time and money.
- Mounts onto #10 & 5mm studs.



IBS No.	Length	Strength	Width	Bundle	Qty
SM-6-50	6"	50 lbs	.18	1.4"	25

E  
L  
E  
C  
T  
R  
I  
C  
A  
L



### Dual Clamp Cable Ties

- Designed to provide **parallel separation** between hoses, wires, cables and tubing to protect from abrasion.
- **Optional mounting hole** for securing bundles along
- **150 lb. tensile strength** ensures enough strength for heavy duty applications.
- Straps are **releasable** for increased serviceability.
- **Heat and UV stabilized** for longer life in applications outdoors and in higher temperatures




IBS No.	Length		MIN Tensile Strength		Width		MAX Bundle		Stud Diam.		Operating Temperature	Qty
	in.	(mm)	lbs	(N)	in.	(mm)	in.	(mm)	in.	(mm)		
141140	13.0	(330.20)	150 lbs	(667)	.50	(12.7)	1.3	(33.0)	1/4	M6	-40°F to +221° F -40°C to +105° C	50
141141	19.2	(487.68)	150 lbs	(667)	.50	(12.7)	2.28	(58.0)	1/4	M6	-40°F to +221° F -40°C to +105° C	50

### Cable & Tubing Mounting Tie Wraps Assortment

IBS No. 727R • 7 Items • 255 Pcs

Packaged in a locking steel drawer for easy storage & organization















**IBS, Inc.**  
SPECIALTY PRODUCTS FOR MAINTENANCE & REPAIR  
INDUSTRIALBOLT.COM © © © 800-678-1906

**Mounting Tie Wraps**

Assortment No. 727R

<p><b>SM-6-50</b> 6" 50LB STUD MOUNT CABLE TIE WRAP BLACK</p> 	
<p><b>PMB-8-50</b> 8" 50LB BLACK PUSH MOUNT CABLE TIE WRAP</p> 	
<p><b>BH-10-100</b> 9-5/8" 100LB BUTTON HD TIE WRAP BLACK</p> 	
<p><b>MH-7-50</b> 7" 50LB NATURAL MOUNTING NYLON TIE WRAP</p> 	<p><b>MBH-7-50</b> 7" 50LB BLACK NYLON MOUNTING TIE</p> 
<p><b>MH-14-120</b> 14" 120LB NATURAL MOUNTING NYLON TIE WRAP</p> 	
<p><b>141140</b> 13IN DUAL CLAMP CABLE TIE BLACK</p> 	



# IBS, INCORPORATED

## Nylon Tie Wraps Q04

### Cable Tie Gun (Q04)

3/32" - 3/16" Capacity



- **Capacity:** 3/32-Inch (2.4mm) to 3/16-Inch (4.8mm) wide and up to 1/16-Inch (1.58mm) thick — **works on 18 lb. to 50 lb. cable ties.**
- **Generates 18-50-Pounds** of tensile strength for a firm and snug bundle.
- **Flush cuts end of cable tie** for a clean and smooth end, eliminating the hazardous, sharp edges left behind with regular tie ends.
- **Adjustable bundling pressure**, allowing it to be used on various types of materials without damaging the material.
- Body is **constructed of high impact nylon and fiberglass** for strength and durability.
- Not compatible with stainless steel ties.

IBS No.	Description	Qty
141416	Cable Tie Gun	1

### Mini Cable Tie Gun (T03)



- Convenient, pocket sized cable gun.
- Secures & cuts cable ties 18-50 lbs tensile strength.
- Provides a tighter installation of nylon cable ties vs. manual installation.
- Works with ties from 2.4 mm to 4.8 mm wide (0.094" to .0188") with tensile strength from 18 to 50 lbs.
- Twist cable gun to cut and trim off excess cable tie length.
- Contoured trigger and palm rest is easy on the hands.
- Heavy, long-wearing mechanism and handle.

IBS No.	Description	Qty
104487	Mini Cable Tie Gun	1

**ALWAYS WEAR SAFETY GLASSES  
DO NOT OVER-TIGHTEN**

### Cable Tie Bases


Bases are backed with foam adhesive. For use with 18, 30, and 50 lb. ties.



IBS No.	Size	Color	Qty
3M-6292	1 x 1	Ivory	25
3M-6294	3/4 x 3/4	Ivory	25
3M-6297	1 x 1	Black	25

### Adjustable Cable & Hose Mounts

These clamps are highly resistant to chemicals, heat and impact. The ladder style fastening system allows them to be easily released and refastened. They are ideal for securing wires, cables, hose or bundles of various shapes and sizes. They can be mounted using either a screw or the adhesive backing and can be used over and over again. The three sizes accommodate sizes from #14 wire to 1" hose or cable.



IBS No.	A	B	S	L	Use Range	Qty
L-013	.709	.984	.314	2.34	.118 - .500	25
L-018	.827	1.18	.472	3.12	.197 - .827	25
L-023	.984	1.38	.551	3.37	.275 - .984	25

### Mini Flush Cutters

- Overall length: 5"
- Use to flush cut small gauge wire, cord, cable ties and more.
- Steel spring self-opening action.
- Heat treated blades.
- Contoured cushion grip handles.



IBS No.	Description	Qty
202101	Mini Flush Cutters	1

E  
L  
E  
C  
T  
R  
I  
C  
A  
L



### Vinyl Dipped Hose Clamps

Clamps are furnished open. They are made of zinc plated steel with a 1/32" thick black vinyl plastic coating. Great for wire cable and all types of hose and tubing. Resistant to abrasion and chemicals. Temperature range -30°F to +350°F.



IBS No.	ID	Hole Size	Width	Qty
16540	1/4	1/4	1/2	25
16530	3/8	1/4	1/2	25
16531	1/2	1/4	1/2	25
16534	5/8	1/4	1/2	25
16532	3/4	1/4	1/2	25
16546	1	1/4	1/2	25
16541	5/16	3/8	3/4	25
16542	3/8	3/8	3/4	25
16543	1/2	3/8	3/4	25
16544	5/8	3/8	3/4	25
16545	3/4	3/8	3/4	25
16547	1	3/8	3/4	25
16533	1-1/4	3/8	3/4	25
16548	1-1/2	3/8	3/4	25
16550	2	3/8	3/4	25

### Nylon Clamps

Durable nylon clamp. Ideal for channeling cable and wire. Operating temperature ranges from - 60°F to 275°F. Natural color.



IBS No.	ID	Width	Screw Size	Qty
7118A	1/8	3/8	#10	25
7119A	3/16	3/8	#10	25
7120A	1/4	3/8	#10	25
7121A	5/16	3/8	#10	25
7122A	3/8	3/8	#10	25
7123A	7/16	3/8	#10	25
7124A	1/2	3/8	#10	25
7125A	9/16	1/2	#10	25
7126A	5/8	1/2	#10	25
7128A	3/4	1/2	#10	25
7129A	7/8	1/2	#10	25
7130A	1	1/2	#10	10

### Rubber Insulated Clamps

Excellent for securing all types of wiring to the body or frame of all types of mobile equipment. Flexible neoprene cushion holds the lines firmly while protecting them from shock, abrasion and vibration.



ALUMINUM			
1/4" Mounting Hole		1/2" Wide	
IBS No.	ID	Stamp	Qty
7314A	1/4	4	25
7315A	3/8	6	25
7316A	1/2	8	25
7317A	5/8	10	25
7318A	3/4	12	25
7319A	7/8	14	10
7320A	1	16	10
7321A	1-1/8	18	10
7322A	1-1/4	20	10
7323A	1-3/8	22	10
7324A	1-1/2	24	10
7325A	1-5/8	26	10



YELLOW ZINC PLATED STEEL			
3/8" Mounting Hole		5/8" Wide	
IBS No.	ID	Stamp	Qty
7514A	1/4	4	25
7515A	3/8	6	25
7516A	1/2	8	25
7517A	5/8	10	25
7518A	3/4	12	25
7519A	7/8	14	10
7520A	1	16	10
7522A	1-1/4	20	10
7524A	1-1/2	24	10
7525A	2	32	5
7527A	2-1/2	40	5

### Chassis Clips

Spring steel, push on wire clips, finished in black enamel. Spring tension holds the clip in place while it secures the wires to panel surfaces.



IBS No.	Frame	Qty
7060A	3/16	50
7061A	1/4	50
7062A	3/8	50



# IBS, INCORPORATED

## Assortments Z02

### Vinyl Coated Clamps

IBS No. 802R • 10 Items • 197 Pcs  
Packaged in a locking steel drawer for easy storage and organization



IBS, Inc.		Vinyl Coated Clamps	
Assortment No. 802R			
16840 1/4ID 1/4 STUD VINYL COATED LOOM CLAMP	16831 1/2ID 1/4 STUD VINYL COATED LOOM CLAMP	16547 1ID 3/8 STUD VINYL COATED LOOM CLAMP	16548 1-1/2ID 3/8 STUD VINYL COATED LOOM CLAMP
16841 5/16ID 3/8STUD VINYL COATED LOOM CLAMP	16834 5/8ID 1/4 STUD VINYL COATED LOOM CLAMP		
16830 3/8ID 1/4 STUD VINYL COATED LOOM CLAMP	16845 3/4ID 3/8 STUD VINYL COATED LOOM CLAMP	16853 1-1/4ID 13/32 STUD VINYL COATED LOOM CLAMP	16850 2ID 3/8 STUD VINYL COATED LOOM CLAMP

### Nylon Clamps

IBS No. 145R • 12 Items • 525 Pcs  
Packaged in a locking steel drawer for easy storage and organization



IBS, Inc.		Nylon Clamps	
Assortment No. 145R			
7118A 3/8 NYLON CLAMP	7119A 3/16 NYLON CLAMP	7120A 1/4 NYLON CLAMP	
7121A 5/16 NYLON CLAMP	7122A 3/8 NYLON CLAMP	7123A 7/16 NYLON CLAMP	
7124A 1/2 NYLON CLAMP	7125A 9/16 NYLON CLAMP	7126A 5/8 NYLON CLAMP	
7128A 3/4 NYLON CLAMP	7129A 7/8 NYLON CLAMP	7130A 1 NYLON CLAMP	

### Nylon & Rubber Clamps

IBS No. 141R • 16 Items • 230 Pcs  
Packaged in a locking steel drawer for easy storage and organization



IBS, Inc.		Rubber Insulated & Nylon Clamps	
Assortment No. 141R			
7120A 1/4 NYLON CLAMP	7122A 3/8 NYLON CLAMP	7124A 1/2 NYLON CLAMP	7126A 5/8 NYLON CLAMP
7314A 1/4 INSULATED CLAMP 1/4 STUD STAMP #4	7315A 3/8 INSULATED CLAMP 1/4 STUD STAMP #6	7316A 1/2 INSULATED CLAMP 1/4 STUD STAMP #8	7318A 5/4 INSULATED CLAMP 1/4 STUD STAMP #12
7320A 1 INSULATED CLAMP 1/4 STUD STAMP #16	7322A 1-1/4 INSULATED CLAMP 1/4 STUD STAMP #20	7324A 1-1/2 INSULATED CLAMP 1/4 STUD STAMP #24	7514A 1/4 INSULATED CLAMP 3/8 STUD STAMP #4
7516A 1/2 INSULATED CLAMP 3/8 STUD STAMP #8	7518A 3/4 INSULATED CLAMP 3/8 STUD STAMP #12	7520A 1 INSULATED CLAMP 3/8 STUD STAMP #16	7522A 1-1/4 INSULATED CLAMP 3/8 STUD STAMP #18

### Rubber Insulated Clamps 1/4" Mounting Hole

IBS No. 146R • 12 Items • 90 Pcs  
Packaged in a locking steel drawer for easy storage and organization



IBS, Inc.		Rubber Insulated Clamps 1/4" Mounting Hole	
Assortment No. 146R			
7314A 1/4 INSULATED CLAMP 1/4 STUD STAMP #4	7315A 3/8 INSULATED CLAMP 1/4 STUD STAMP #6	7316A 1/2 INSULATED CLAMP 1/4 STUD STAMP #8	
7317A 5/8 INSULATED CLAMP 1/4 STUD STAMP #10	7318A 3/4 INSULATED CLAMP 1/4 STUD STAMP #12	7319A 7/8 INSULATED CLAMP 1/4 STUD STAMP #14	
7320A 1 INSULATED CLAMP 1/4 STUD STAMP #16	7321A 1-1/8 INSULATED CLAMP 1/4 STUD STAMP #18	7322A 1-1/4 INSULATED CLAMP 1/4 STUD STAMP #20	
7323A 1-3/8 INSULATED CLAMP 1/4 STUD STAMP #22	7324A 1-1/2 INSULATED CLAMP 1/4 STUD STAMP #24	7325A 1-5/8 INSULATED CLAMP 1/4 STUD STAMP #26	

ELECTRICAL



### Rubber Insulated Clamps 3/8" Mounting Hole


IBS No. 147R • 8 Items • 75 Pcs  
Packaged in a locking steel drawer for easy storage and organization



IBS, Inc. SPECIALTY PRODUCTS FOR MAINTENANCE & REPAIR INDUSTRIALMARKET.COM 8 8 0 888-878-1888		Rubber Insulated Clamps 3/8" Mounting Hole	
Assortment No. 147R			
7514A 1/4 INSULATED CLAMP 3/8 STUD STAMP #4	7515A 3/4 INSULATED CLAMP 3/8 STUD STAMP #6	7516A 1/2 INSULATED CLAMP 3/8 STUD STAMP #8	
7517A 5/8 INSULATED CLAMP 3/8 STUD STAMP #10	7518A 3/4 INSULATED CLAMP 3/8 STUD STAMP #12	7519A 7/8 INSULATED CLAMP 3/8 STUD STAMP #14	
7520A 1 INSULATED CLAMP 3/8 STUD STAMP #16	7522A 1-1/4 INSULATED CLAMP 3/8 STUD STAMP #18		

### Grommets (Q1C)

Grommets are made of flexible oil-resistant extra tough Styrene Butadiene Copolymer Rubber. They have an operating temperature from -60°F to 180°F. Insert them into pre-drilled holes to protect wires against cutting and fraying.



A = O.D. of wire or wires  
B = Wall thickness  
C = I.D. of pre-drilled hole  
D = Grommet overall outside diameter  
E = Grommet thickness

IBS No.	Bore ID (A)	Groove Width (B)	Groove Diameter (C)	Outside Diameter (D)	Overall Thickness (E)	Qty
A-4410	5/32	1/16	1/4	3/8	3/16	25
A-4413	3/16	1/16	5/16	1/2	1/4	25
A-4414	3/16	3/32	9/32	3/8	5/16	25
A-16454	1/4	1/16	3/8	1/2	3/16	25
A-4419	5/16	1/16	7/16	9/16	3/16	25
A-4423	3/8	1/16	1/2	5/8	9/32	25
A-4428	1/2	3/32	3/4	31/32	9/32	25
A-16458	1/2	1/8	3/4	1	1/2	25
A-4430	1/2	1/4	13/16	1-1/16	1/2	25
A-4432	5/8	1/16	7/8	1-1/8	5/16	25
A-4433	3/4	1/16	15/16	1-1/8	1/4	25

### Grommet Kit (Z02)

IBS No. 230R • 11 Items • 220 Pieces  
Packaged in a locking steel drawer for easy storage and organization



IBS, Inc. SPECIALTY PRODUCTS FOR MAINTENANCE & REPAIR INDUSTRIALMARKET.COM 8 8 0 888-878-1888		Grommet Kit	
Assortment No. 230R			
A-4410 5/32ID X 1/16 GROOVE RUBBER	A-4413 3/16ID X 1/16 GROOVE RUBBER	A-4414 3/16ID X 3/32 GROOVE RUBBER	
A-16454 1/4ID X 1/16 GROOVE RUBBER	A-4419 5/16ID X 1/16 GROOVE RUBBER	A-4423 3/8ID X 1/16 GROOVE RUBBER	
A-4428 1/2ID X 3/32 GROOVE RUBBER	A-16458 1/2ID X 1/8 GROOVE RUBBER	A-4432 5/8ID X 1/16 GROOVE RUBBER	
A-4433 3/4ID X 1/16 GROOVE RUBBER	A-4430 1/2ID X 1/4 GROOVE RUBBER		

ELECTRICAL



# IBS, INCORPORATED

## Automotive Bulbs Q03

ELECTRICAL

	IBS No.	Volts	Function	Candle Power	Life (hrs)	Base	Pkg Qty
	B37	14	Instrument	.5 c.p.	2500	Wedge	10
	B53	14.4	Instrument	1 c.p.	1000	Min Bay	10
	B57	14	Instrument Side Marker	2 c.p.	500	Min Bay	10
	B67	13.5	Parking	4 c.p.	5000	S.C. Bayonet	10
	B73	14	Miniature Wedge	0.3 c.p.	15,000	Wedge	10
	B89	13	Courtesy Dome	6 c.p.	750	S.C. Bayonet	10
	B90	12	Parking Dome Instrument	6 c.p.	750	Mini Base	10
	B93	12	Instrument	15 c.p.	200	S.C. Bayonet	10
	B97	13.5	License Parking	4 c.p.	5000	S.C. Bayonet	10
	B168	14	Side Marker	3 c.p.	1500	Wedge	10
	B193	14	Instrument	2 c.p.	2500	Wedge	10
	B194	14	Side Marker	2 c.p.	2500	Wedge	10
	B199	13	Instrument	32 c.p.	1200	Mini Base	10
	B194NA	14	Side Marker Amber	1.5 c.p.	1500	Wedge	10
	B211-2	12	Courtesy Dome	12 c.p.	1000	Miniature Cap	10
	B561	13	Instrument	12 c.p.	1000	Rigid Loop Base	10
	B623	28	Courtesy Dome	6 c.p.	1000	S.C. Bayonet	10
	B624	28	HD Truck Instrument	6 c.p.	1000	D.C. Bayonet	10
	B904	14	Instrument	6 c.p.	1000	Wedge	10
	B906	13	Instrument	6 c.p.	1000	Wedge	10
	B912	12.8	Side Marker / Dome	12 c.p.	1000	Wedge	10
	B916	13.5	Side Marker / Dome	2 c.p.	10,000	Wedge	10
	B916NA	13	Side Marker / Amber	1.5 c.p.	10,000	Wedge	10

S.C. = SINGLE CONTACT D.C. = DOUBLE CONTACT MIN. = MINIATURE

# IBS, INCORPORATED

## Automotive Bulbs Q03



ELECTRICAL

	IBS No.	Volts	Function	Candle Power	Life (hrs)	Base	Pkg Qty
	B921	12.8	Side Marker / Dome	21 c.p.	500	Wedge	10
	B922	13.0	Instrument	15 c.p.	200	Wedge	10
	B1003	12.8	Side Marker / Dome	15 c.p.	200	S.C. Bayonet	10
	B1004	12.8	Dome / Courtesy	15 c.p.	200	D.C. Bayonet	10
	B1034	12.8	Stop & Turn	3.2 c.p.	200	D.C. Index	10
	B1073	12.8	Front Turn	32 c.p.	200	S.C. Bayonet	10
	B1076	12.8	Front Turn	32 c.p.	200	D.C. Bayonet	10
	B1141	12.8	Rear Turn	21 c.p.	1000	S.C. Bayonet	10
	B1142	12.8	General Purpose	21 c.p.	1000	D.C. Bayonet	10
	B1156	12.8	Front & Rear Turn	32 c.p.	1200	S.C. Bayonet HD	10
	B1157	12.8	Stop / Tail / Turn	32 c.p.	1200	D.C. Index HD	10
	B1157NA	12.8	Stop / Tail / Turn Amber	24 c.p.	1200	D.C. Index HD	10
	B1662	28	Construction Equipment	32 c.p.	400 to 1000	D.C. Bayonet	10
	B1683	28	Stop / Turn H.D. Truck	32 c.p.	500	S.C. Bayonet	10
	B1816	13.0	Instrument	3 c.p.	1000	Min. Bayonet	10
	B1891	14.0	Instrument	2 c.p.	7500	Bayonet	10
	B1893	14.0	Instrument	2 c.p.	7500	Min. Bayonet	10
	B1895	14.0	Instrument	2 c.p.	2000	Min. Bayonet	10
	B2057	12.8	Stop / Turn / Tail	32 c.p. 2 c.p.	1200 5000	D.C. Index	10
	B2057NA	12.8	Stop / Turn / Tail Amber	32 c.p. 2 c.p.	1200 5000	D.C. Index	10
	B3057	12.8	Stop / Turn / Tail	32 c.p. 2 c.p.	1200 5000	Wedge	10
	B3057NA	12.8	Stop / Turn / Tail	24c.p. 2 c.p.	1200 5000	Wedge	10
	B3156	12.0	Stop / Turn	32 c.p.	1200	Wedge	10

S.C. = SINGLE CONTACT    D.C. = DOUBLE CONTACT    MIN. = MINIATURE













# IBS, INCORPORATED

## Automotive Bulbs Q03

ELECTRICAL

	IBS No.	Volts	Function	Candle Power	Life (hrs)	Base	Pkg Qty
	<b>B3157</b>	12.0	Stop / Turn / Tail	32 c.p. 3 c.p.	1200 5000	Wedge	10
	<b>B3157NA</b>	12.0	Stop / Turn / Tail	24 c.p. 2.2 c.p.	1200 5000	Wedge	10
	<b>B3457</b>	14.0	Stop / Turn / Tail	40 c.p. 3 c.p.	400 5000	Plastic Wedge	10
	<b>B3357NA</b>	12.8	Stop / Turn / Tail	30 c.p.	400	Wedge	10
	<b>B3457NA</b>	14.0		2.2 c.p.	5000		
	<b>B4157NA</b>	12.0	Stop / Turn / Tail	32 c.p. 3 c.p.	1200 5000	Plastic Wedge	10
	<b>B7443</b>	12.0	Stop / Turn Tail	3.5 c.p.	500	Wedge	10
	<b>B9004</b>	12.8	Halogen Headlight Bulb	45 to 65 Watts	320 to 150	Halogen Capsule	2
	<b>B9006</b>	12.0	Halogen Headlight Bulb	55 Watts	450	Halogen Capsule	2
	<b>B9007</b>	12.8	Halogen Headlight Bulb	55 to 65 Watts	1100 to 150	Halogen Capsule	6
	<b>PR-2</b>	2.38	Flashlight	.8 c.p.	15	S.C. Min Flanged	10
	<b>5457A</b>	Instrument Panel Bulb Socket Holder Use with B194 & B194NA				1/2 Hole	5
	<b>5458A</b>	Instrument Panel Bulb Socket Holder Use with B194 & B194NA				5/8 Hole	5

**S.C. = SINGLE CONTACT    D.C. = DOUBLE CONTACT    MIN. = MINIATURE**




















### Automotive Bulbs

IBS No. 327R • 16 Items • 160 Pcs

Packaged in a locking steel drawer for easy storage and organization




























					<b>Automotive Bulbs</b>				
					Assortment No. 327R				
<b>B194</b> #194 12V INSTRUMENT / SIDE 	<b>B194NA</b> 12V AMBER PARKING / SIDE 	<b>B1893</b> 12V HD AUTO INSTRUMENT LIGHT 	<b>B1895</b> 12V PARKING / SIDE MARKER 	<b>B53</b> 12V AUTO INSTRUMENT LIGHT 					
<b>B57</b> 12V AUTO INSTRUMENT LIGHT 	<b>B1157</b> 12V STOP - TURN - SIGNAL LIGHT 	<b>B1157NA</b> 12V STOP - TAIL - SIGNAL 	<b>B3157</b> 12V STOP - TAIL - TURN LIGHT 	<b>B3157NA</b> 12V STOP - TAIL - TURN LIGHT 					
<b>B2057</b> 12V STOP - TAIL - TURN LIGHT 	<b>B3057</b> 12V STOP - TAIL - TURN LIGHT 	<b>B1156</b> 12V FRONT & REAR TURN LIGHT 	<b>B3156</b> 12V FRONT & REAR TURN LIGHT 						
<b>B916</b> 12V PARKING / SIDE MARKER 	<b>B97</b> 12V PARKING / LICENSE PLATE 								

### 12V Mini Auto Bulbs

IBS No. 722R • 24 Items • 186 Pcs

Packaged in a locking steel drawer for easy storage and organization



					<b>12V Miniature Auto Bulb Assortment</b>					
					Assortment No. 722R					
<b>B37</b> 14V AUTO AIR COURTESY DOME IND AUTOMOTIVE BULB GLASS WEDGE 	<b>B53</b> 12V AUTO INSTRUMENT INDICATOR AUTOMOTIVE BULB MINI BASE 	<b>B57</b> 12V AUTO INSTRUMENT INDICATOR AUTOMOTIVE BULB MINI BASE 	<b>B67</b> 12V PARKING DOME INDICATOR AUTOMOTIVE BULB MINI BASE 	<b>B89</b> 12V PARKING DOME INSTRUMENT AUTOMOTIVE BULB MINI BASE 	<b>B97</b> 12V PARKING LICENSE PLATE AUTOMOTIVE BULB MINI BASE 					
<b>B194</b> 12V INSTRUMENT SIDE MARKER AUTOMOTIVE BULB GLASS WEDGE 	<b>B194NA</b> 12V SIDE MARKER PARK AMBER AUTOMOTIVE BULB 	<b>B906</b> 12V SIDE MARKER DOME AUTOMOTIVE BULB 	<b>B912</b> 12V SIDE MARKER DOME AUTOMOTIVE BULB 	<b>B916</b> 12V PARKING SIDE MARKER AUTOMOTIVE BULB 	<b>B921</b> 12V SIDE MARKER DOME AUTOMOTIVE BULB 					
<b>B1156</b> 12V FRONT REAR TURN LIGHT AUTOMOTIVE BULB 	<b>B1157</b> 12V STOP TURN SIGNAL LIGHT AUTOMOTIVE BULB 	<b>B1157NA</b> 12V STOP TAIL SIGNAL AMBER AUTOMOTIVE BULB 	<b>B1893</b> 14V HD INSTRUMENT MINI BASE AUTOMOTIVE BULB 	<b>B1895</b> 12V PARKING SIDE MARKER AUTOMOTIVE BULB 	<b>B2057</b> 12V STOP TAIL TURN LIGHT AUTOMOTIVE BULB 					
<b>B3057</b> 12V STOP TAIL TURN LIGHT AUTOMOTIVE BULB PLASTIC WEDGE 	<b>B3156</b> 12V FRONT REAR TURN LIGHT AUTOMOTIVE BULB PLASTIC WEDGE 	<b>B3157</b> 12V STOP TAIL TURN LIGHT AUTOMOTIVE BULB PLASTIC WEDGE 	<b>B3157NA</b> 12V STOP TAIL TURN LIGHT AMBER AUTOMOTIVE BULB PLASTIC WEDGE 	<b>5457A</b> INSTRUMENT PANEL BULB SOCKET HOLDER 1/2 HOLE 	<b>5458A</b> INSTRUMENT PANEL BULB SOCKET HOLDER 5/8 HOLE 	For Bulb B194 & B194NA	For Bulb B194 & B194NA			

ELECTRICAL



# IBS, INCORPORATED

## Automotive Electrical Q03

### Glass Tube Fuses

Glass Fuses are widely used in electronic and electrical applications where proper fuse selection is critical to performance. Quality fuses provide safety and reliability by preventing short circuits and overloads that can cause fires and damage.

- For electronic/electrical applications, fuse must be rated at 125V or better.
- Voltage must match or exceed the fuse being replaced (125V household current; 12V for auto; 24V for heavy duty).
- Amperage must match that of the old fuse.



**AGA**  
1/4 x 5/8

IBS No.	AMP	Volt	Qty
AGA1	1	125	5
AGA2	2	125	5
AGA3	3	125	5
AGA5	5	125	5
AGA10	10	32	5
AGA15	15	32	5
AGA20	20	32	5
AGA25	25	32	5
AGA30	30	32	5



**AGX**  
1/4 x 1

IBS No.	AMP	Volt	Qty
AGX3	3	125	5
AGX15	15	32	5
AGX20	20	32	5
AGX25	25	32	5
AGX30	30	32	5



**AGC**  
1/4 x 1-1/4

IBS No.	AMP	Volt	Qty
AGC1	1	250	5
AGC2	2	250	5
AGC2-1/2	2.5	250	5
AGC3	3	250	5
AGC4	4	250	5
AGC5	5	250	5
AGC6	6	250	5
AGC7-1/2	7.5	250	5
AGC8	8	250	5
AGC10	10	250	5
AGC15	15	32	5
AGC20	20	32	5
AGC25	25	32	5
AGC30	30	32	5
AGC35	35	32	5
AGC40	40	32	5



**SFE**

IBS No.	AMP	Size	Qty
SFE4	4	1/4 x 5/8	5
SFE6	6	1/4 x 3/4	5
SFE7-1/2	7.5	1/4 x 7/8	5
SFE9	9	1/4 x 1	5
SFE14	14	1/4 x 1-1/6	5
SFE20	20	1/4 x 1-1/4	5
SFE30	30	1/4 x 1-7/8	5



**AGW**

1/4 x 7/8 32 Volt

IBS No.	AMP	Qty
AGW1	1	5
AGW2-1/2	2.5	5
AGW4	4	5
AGW5	5	5
AGW6	6	5
AGW7-1/2	7.5	5
AGW15	15	5
AGW20	20	5
AGW30	30	5
AGW35	35	5



**GBC**

1/4 x 31/32 32 Volt

IBS No.	AMP	Qty
GBC2-1/2	2.5	5
GBC5	5	5
GBC8	8	5
GBC16	16	5
GBC25	25	5

### FUSE PULLER



IBS No.	Description	Qty
FP-C	Dual purpose — pulls and installs both blade type and glass tube fuses. Single piece design made of durable plastic.	1

E  
L  
E  
C  
T  
R  
I  
C  
A  
L



### ATR Micro Blade-Type Fuses

For single-circuit protection. A sub-miniature design that meets the need for more circuits to be protected while utilizing less space and its ability to cope with high temperatures in adverse environments makes it the recommended choice for newer vehicles.

Photo	IBS No.	AMP	Volts	Color	Qty	Photo	IBS No.	AMP	Volts	Color	Qty
	ATR5	5	32	Tan	5		ATR20	20	32	Yellow	5
	ATR7-1/2	7-1/2	32	Brown	5		ATR25	25	32	Clear	5
	ATR10	10	32	Red	5		ATR30	30	32	Green	5
	ATR15	15	32	Blue	5						

### ATL Micro 3 Blade-Type Fuses

For dual-circuit protection in one fuse. It has 3 terminals and 2 fuse elements with a common center terminal. Its sub-miniature design meets the need for more circuits to be protected while utilizing less space and its ability to cope with high temperatures in adverse environments makes it a recommended choice for newer vehicles.

Photo	IBS No.	AMP	Volts	Color	Qty	Photo	IBS No.	AMP	Volts	Color	Qty
	ATL5	5	32	Tan	5		ATL10	10	32	Red	5
	ATL7-1/2	7-1/2	32	Brown	5		ATL15	15	32	Blue	5

### ATR, ATL & ATM Low Profile Fuses Assortment (Z02)

IBS No. 822R • 18 Items • 160 Pcs

Packaged in a locking steel drawer for easy storage and organization

IBS, Inc. SPECIALTY PRODUCTS FOR MAINTENANCE & REPAIR INDUSTRIALBOLTY.COM © © © 800-678-1906		ATR, ATL & ATM Low-Profile Fuses			Assortment No. 822R
ATR5 5AMP MICRO2 FUSE 32V TAN FUSE 	ATR7-1/2 7-1/2AMP MICRO2 FUSE 32V BROWN FUSE 	ATR10 10AMP MICRO2 FUSE 32V RED FUSE 	ATR15 15AMP MICRO2 FUSE 32V BLUE FUSE 	ATR20 20AMP MICRO2 FUSE 32V YELLOW FUSE 	
ATR25 25AMP MICRO2 FUSE 32V CLEAR FUSE 	ATR30 30AMP MICRO2 FUSE 32V GREEN FUSE 	ATL5 5AMP MICRO3 FUSE 32V TAN FUSE 	ATL7-1/2 7-1/2AMP MICRO3 FUSE 32V BROWN FUSE 	ATL10 10AMP MICRO3 FUSE 32V RED FUSE 	
ATL15 15AMP MICRO3 FUSE 32V BLUE FUSE 	ATM5LP AUTO FUSE ATM LOW PROFILE 5AMP 	ATM7-1/2LP AUTO FUSE ATM LOW PROFILE 7-1/2AMP 	ATM10LP AUTO FUSE ATM LOW PROFILE 10AMP 	ATM15LP AUTO FUSE ATM LOW PROFILE 15AMP 	
ATM20LP AUTO FUSE ATM LOW PROFILE 20AMP 	ATM25LP AUTO FUSE ATM LOW PROFILE 25AMP 	ATM30LP AUTO FUSE ATM LOW PROFILE 30AMP 			



# IBS, INCORPORATED

## Automotive Electrical Q03

### Micro Fuses Assortment (Z02)

IBS No. 766R • 16 Items • 135 Pcs

Packaged in a locking steel drawer for easy storage and organization



































ELECTRICAL

**IBS, Inc.**  
SPECIALTY PRODUCTS FOR MAINTENANCE & REPAIR  
INDUSTRIALBOLT.COM • 800-678-1906

**Micro Fuses**

Assortment No. 766R

<b>ATR5</b> 5AMP MICRO2 FUSE 32V TAN FUSE  	<b>ATR7-1/2</b> 7-1/2AMP MICRO2 FUSE 32V BROWN FUSE  	<b>ATR10</b> 10AMP MICRO2 FUSE 32V RED FUSE  	<b>ATR15</b> 15AMP MICRO2 FUSE 32V BLUE FUSE  	<b>ATR20</b> 20AMP MICRO2 FUSE 32V YELLOW FUSE  
<b>ATR25</b> 25AMP MICRO2 FUSE 32V CLEAR FUSE  	<b>ATR30</b> 30AMP MICRO2 FUSE 32V GREEN FUSE  	<b>ATL5</b> 5AMP MICRO3 FUSE 32V TAN FUSE  	<b>ATL7-1/2</b> 7-1/2AMP MICRO3 FUSE 32V BROWN FUSE  	<b>ATL10</b> 10AMP MICRO3 FUSE 32V RED FUSE  
<b>ATL15</b> 15AMP MICRO3 FUSE 32V BLUE FUSE  	<b>FMM15</b> 15AMP MCASE FUSE 32V GREY  	<b>FMM20</b> 20AMP MCASE FUSE 32V BLUE  	<b>FMM25</b> 25AMP MCASE FUSE 32V WHITE  	<b>FMM30</b> 30AMP MCASE FUSE 32V PINK  
<b>FMM40</b> 40AMP MCASE FUSE 32V GREEN  				

### Micro Fuses Travel Tray Assortment (Z02)

























IBS No. 803R • 11 Items • 55 Pcs


Packaged in a locking plastic travel tray for easy storage and organization

**IBS, Inc.**  
SPECIALTY PRODUCTS FOR MAINTENANCE & REPAIR  
INDUSTRIALBOLT.COM • 800-678-1906

**ATR Micro2 and ATL Micro3 Blade Fuses**

Assortment 803R

<b>ATR5</b> 5AMP MICRO2 FUSE 32V TAN FUSE  	<b>ATR10</b> 10AMP MICRO2 FUSE 32V RED FUSE  	<b>ATR20</b> 20AMP MICRO2 FUSE 32V YELLOW FUSE  	<b>ATR30</b> 30AMP MICRO2 FUSE 32V GREEN FUSE  	<b>ATL7-1/2</b> 7-1/2AMP MICRO3 FUSE 32V BROWN FUSE  	<b>ATL15</b> 15AMP MICRO3 FUSE 32V BLUE FUSE  
<b>ATR7-1/2</b> 7-1/2AMP MICRO2 FUSE 32V BROWN FUSE  	<b>ATR15</b> 15AMP MICRO2 FUSE 32V BLUE FUSE  	<b>ATR25</b> 25AMP MICRO2 FUSE 32V CLEAR FUSE  	<b>ATL5</b> 5AMP MICRO3 FUSE 32V TAN FUSE  	<b>ATL10</b> 10AMP MICRO3 FUSE 32V RED FUSE  	 







### ATM Low Profile Blade-Type Fuses

Popular for late model vehicles, these compact, low-profile ATM fuses save space and feature an enclosed element for protection against shock and sparks. This is a low profile version of the ATM fuse using the same ratings and universal color-coding as ATM and ATC style fuses.

Photo	IBS No.	AMP	Volts	Color	Qty	Photo	IBS No.	AMP	Volts	Color	Qty
	ATM5LP	5	12	Tan	5		ATM20LP	20	12	Yellow	5
	ATM7-1/2LP	7-1/2	12	Brown	5		ATM25LP	25	12	Clear	5
	ATM10LP	10	12	Red	5		ATM30LP	30	12	Green	5
	ATM15LP	15	12	Light Blue	5						

### ATM Low Profile Fuses Travel Tray(Z02)

IBS No. 721R • 7 Items • 35 Pcs

Packaged in a locking plastic tray for easy storage and organization

**ATM Low Profile Fuses**

Assortment No. 721R

 <small>ATM5LP AUTO FUSE ATM LOW PROFILE 5AMP</small> 	 <small>ATM10LP AUTO FUSE ATM LOW PROFILE 10 AMP</small> 	 <small>ATM15LP AUTO FUSE ATM LOW PROFILE 15 AMP</small> 	 <small>ATM20LP AUTO FUSE ATM LOW PROFILE 20 AMP</small> 	 <small>ATM25LP AUTO FUSE ATM LOW PROFILE 25 AMP</small> 	 <small>ATM30LP AUTO FUSE ATM LOW PROFILE 30 AMP</small> 
--	---	---	---	---	---

**ELECTRICAL**



# IBS, INCORPORATED

## Automotive Electrical Q03

### ATM Blade-Type Fuses


Introduced in the early 90's, ATM fuses are quickly growing in popularity for late model OEM applications. ATM Fuses use the same universal color coding as ATC style. These fuses feature an enclosed element offering protection against shocks and sparks plus corrosion resistance for longer service life.

Photo	IBS No.	AMP	Volts	Color	Qty	Photo	IBS No.	AMP	Volts	Color	Qty
	ATM2	2	12	Gray	5		ATM10	10	12	Red	5
	ATM3	3	12	Violet	5		ATM15	15	12	Light Blue	5
	ATM4	4	12	Pink	5		ATM20	20	12	Yellow	5
	ATM5	5	12	Tan	5		ATM25	25	12	Clear	5
	ATM7-1/2	7.5	12	Brown	5		ATM30	30	12	Green	5

### ATM Blade-Type Fuses Travel Tray

IBS No. 127R • 6 Items • 60 Pcs

Packaged in a locking plastic tray for easy storage and organization

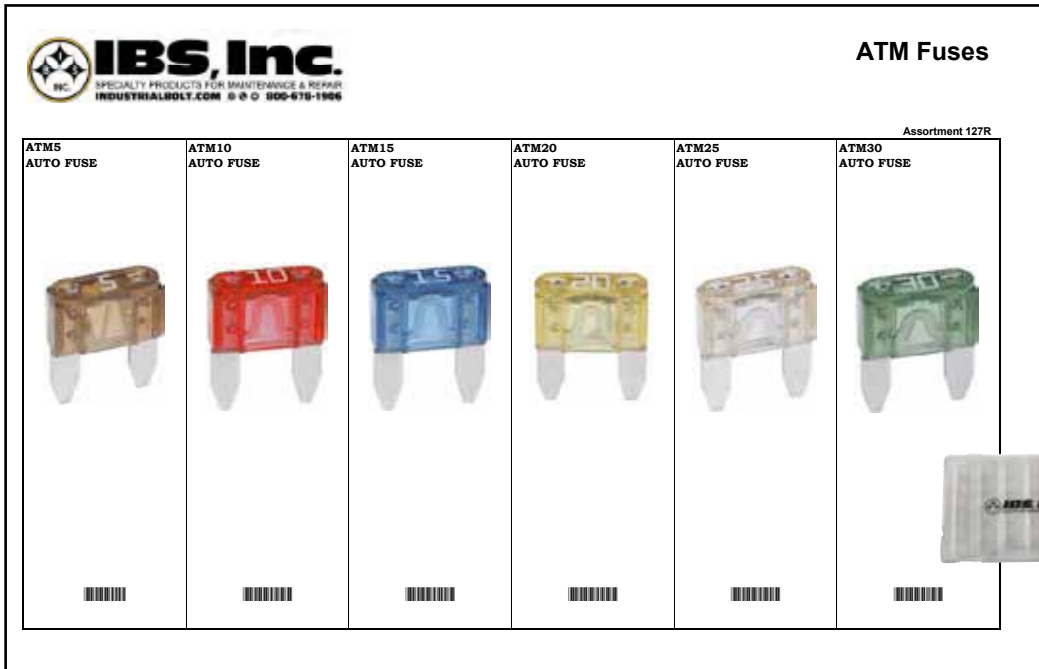

ELECTRICAL



### ATC Blade-Type Fuses

ATC Blade fuses were introduced in the late 1970s and are still widely used by automotive OEM's. Our ATC products use the industry's universal color coding to indicate the amperage, and feature an enclosed element — offering protection against shocks and sparks, plus corrosion resistance for a longer service life.

Photo	IBS No.	AMP	Volts	Color	Qty	Photo	IBS No.	AMP	Volts	Color	Qty
	ATC1	1	12	Black	5		ATC10	10	12	Red	5
	ATC2	2	12	Gray	5		ATC15	15	12	Light Blue	5
	ATC3	3	12	Violet	5		ATC20	20	12	Yellow	5
	ATC4	4	12	Pink	5		ATC25	25	12	Clear	5
	ATC5	5	12	Tan	5		ATC30	30	12	Green	5
	ATC7-1/2	7.5	12	Brown	5		ATC40	40	12	Orange	5

### ATC Blade-Type Fuses Travel Tray (Z02)

IBS No. 792R • 8 Items • 40 Pcs

Packaged in a locking plastic tray for easy storage and organization



ELECTRICAL



# IBS, INCORPORATED

## Assortments Z02

### MAXI Blade-Type Fuses

Maxi Fuses are used to protect circuits in the wiring harness — usually found under the hood, in a fuse panel, or supplementary panel near the battery. Primarily used in domestic cars, MAX fuses also have some applications in imported models. OEM applications currently range up to 60 amps; however, some aftermarket accessories (such as high-end stereos) require protection to 80 amps.


Photo	IBS No.	AMP	Volts	Color	Qty	Photo	IBS No.	AMP	Volts	Color	Qty
	MAX20	20	32	Yellow	1		MAX50	50	32	Red	1
	MAX25	25	32	Gray	1		MAX60	60	32	Blue	1
	MAX30	30	32	Green	1		MAX70	70	32	Tan	1
	MAX40	40	32	Orange	1		MAX80	80	32	Clear	1

ELECTRICAL

### MAXI Blade-Type Fuses Travel Tray (Z02)

IBS No. 128R • 7 Items • 31 Pcs

Packaged in a locking plastic tray for easy storage and organization

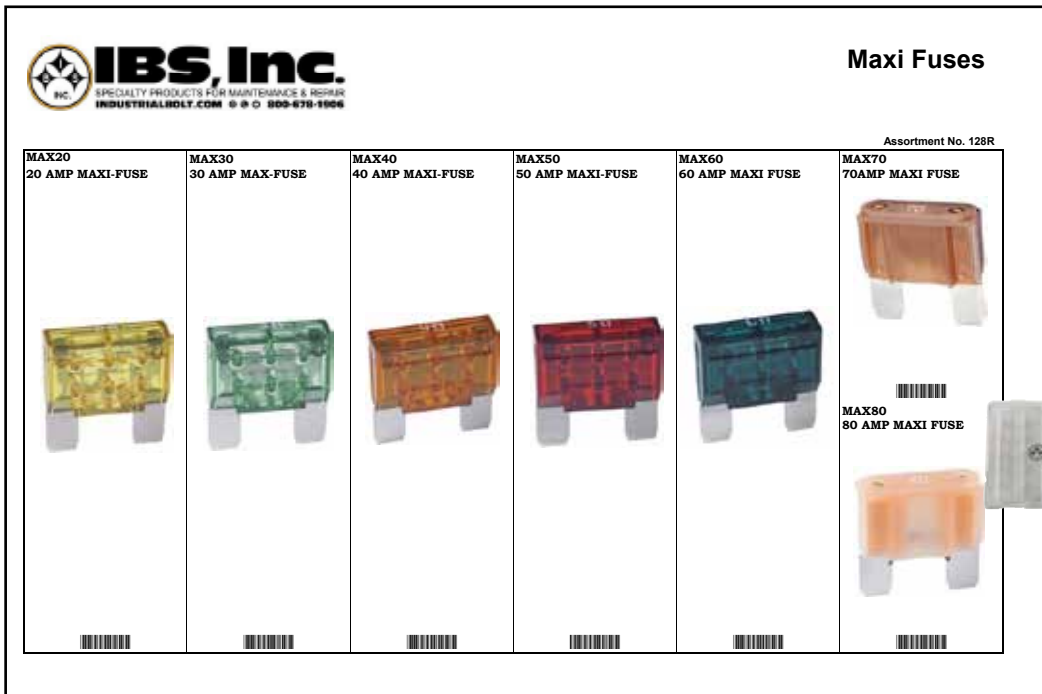

# IBS, INCORPORATED


## Assortments Z08



### Blade Fuses (Z02)

IBS No.720R • 29 Items • 127 Pcs

Packaged in a locking steel drawer for easy storage and organization





**IBS, Inc.**  
SPECIALTY PRODUCTS FOR MAINTENANCE & REPAIR  
INDUSTRIALBOLT.COM • 500-678-1506

**Blade Fuses**  
ATM, ATC and MAX


720R							
ATM2 	ATM3 	ATM4 	ATM5 	ATM7-1/2 	ATM10 	ATM15 	ATM20 
ATM25 	ATM30 	ATC2 	ATC3 	ATC4 	ATC5 	ATC7-1/2 	ATC10 
ATC15 	ATC20 	ATC25 	ATC30 	ATC40 			
MAX20 	MAX30 	MAX40 	MAX50 	MAX60 	MAX70 	MAX80 	FP-C FUSE PULLER 

### Auto Electrical Fuses

IBS No. 290P • 37 Items • 235 Pcs






































Packaged in a locking steel drawer for easy storage and organization





**IBS, Inc.**  
SPECIALTY PRODUCTS FOR MAINTENANCE & REPAIR  
INDUSTRIALBOLT.COM • 500-678-1506

**Automotive Electrical Fuses**

Assortment No. 290P							
AGA15 AUTO FUSE 	AGA20 AUTO FUSE 	AGA30 AUTO FUSE 		SFE7-1/2 AUTO FUSE GLASS TUBE 	SFE14 AUTO FUSE GLASS TUBE 	SFE20 AUTO FUSE GLASS TUBE 	SFE30 AUTO FUSE GLASS TUBE 
AGC1 AUTO FUSE 	AGC4 AUTO FUSE 	AGC7-1/2 AUTO FUSE 	AGC10 AUTO FUSE 	AGC15 AUTO FUSE 	AGC20 AUTO FUSE 	AGC25 AUTO FUSE 	AGC30 AUTO FUSE 
ATC5 AUTO FUSE 	ATC10 AUTO FUSE 	ATC15 AUTO FUSE 	ATC20 AUTO FUSE 	ATC25 AUTO FUSE 	ATC30 AUTO FUSE 	EL-12 HVY DUTY 2 PRONG TRUCK FLASHER 	
ATM5 AUTO FUSE 	ATM10 AUTO FUSE 	ATM15 AUTO FUSE 	ATM20 AUTO FUSE 	ATM25 AUTO FUSE 	ATM30 AUTO FUSE 	EL-13 HVY DUTY 3 PRONG TRUCK FLASHER 	
19518 GLASS TUBE WATER-PROOF IN-LINE 		19513 BLADE TYPE WATER-PROOF IN-LINE FUSE HLDR 				FP-C FUSE PULLER 	
0690T 12 VOLT TESTER 		1588A 3/8 TEST CLIP JAW 		MAX20 20 AMP MAXI FUSE YELLOW 		MAX30 30 AMP MAX FUSE GREEN 	
				MAX40 40 AMP MAXI FUSE ORANGE 			

ELECTRICAL





# IBS, INCORPORATED

## Automotive Electrical Q03

### LED Smart Fuses

#### Blade Type Fuses with LED Indicator

The integrated LED on the top of the fuse glows brightly if the fuse is blown. This eliminates the guesswork and speeds the replacement of the blown fuse. The color-coded fuses instantly let you know the right amperage of the fuse to be replaced. These fuses snap into place without the use of special tools and provide easy identification of blown fuses in hard-to-reach locations.

#### ATM BLADE-TYPE

Photo	IBS No.	AMP	Volts	Color	Qty	Photo	IBS No.	AMP	Volts	Color	Qty
	139212	5	32	Amber	5		139216	20	32	Yellow	5
	139214	10	32	Red	5		139217	25	32	Clear	5
	139215	15	32	Blue	5		139218	30	32	Green	5

#### ATO/ATC BLADE-TYPE

Photo	IBS No.	AMP	Volts	Color	Qty	Photo	IBS No.	AMP	Volts	Color	Qty
	139222	5	32	Amber	5		139226	20	32	Yellow	5
	139224	10	32	Red	5		139227	25	32	Clear	5
	139225	15	32	Blue	5		139228	30	32	Green	5

#### MAXI BLADE-TYPE

Photo	IBS No.	AMP	Volts	Color	Qty	Photo	IBS No.	AMP	Volts	Color	Qty
	139411	20	12	Yellow	1		139414	50	12	Red	1
	139412	30	12	Green	1		139415	60	12	Blue	1
	139413	40	12	Orange	1		139416	80	12	Clear	1

E  
L  
E  
C  
T  
R  
I  
C  
A  
L

# IBS, INCORPORATED

## Assortments Z02



### LED Smart Fuses

**IBS No. 364R • 22 Items • 76 Pcs**  
 Packaged in a locking steel drawer for easy storage and organization



IBS, Inc.		LED Smart Fuses			
Assortment No. 364R					
139212 ATM 5 Amp Mini / Amber	139214 ATM 10 Amp Mini / Red	139215 ATM 15 Amp Mini / Blue	139216 ATM 20 Amp Mini / Yellow	139217 ATM 25 Amp Mini / Clear	139447 ATM Mini In-Line Clear Cover Fuseholder
139218 ATM 30 Amp Mini / Green	139222 ATC 5 Amp Amber	139224 ATC 10 Amp Red	139225 ATC 15 Amp Blue	139450 ATC In-Line Clear Cover Fuseholder	
139226 ATC 20 Amp Yellow	139227 ATC 25 Amp Clear	139228 ATC 30 Amp Green	139411 MAXI 20 Amp Yellow	139425 MAXI In-Line Fuseholder with Cover	
139412 MAXI 30 Amp Green	139413 MAXI 40 Amp Amber	139414 MAXI 50 Amp Red	139415 MAXI 60 Amp Blue	139416 MAXI 80 Amp Clear	

### ATM LED Smart Fuses

**IBS No. 360R • 6 Items • 36 Pcs**  
 Packaged in a clear plastic box for easy storage and organization



IBS, Inc.		ATM Mini Blade LED Smart Fuses			
Assortment No. 360R					
139212 5AMP ATM STYLE LED SMART FUSE	139214 10AMP ATM STYLE LED SMART FUSE	139215 15AMP ATM STYLE LED SMART FUSE	139216 20AMP ATM STYLE LED SMART FUSE	139217 25AMP ATM STYLE LED SMART FUSE	139218 30AMP ATM STYLE SMART FUSE

### ATC LED Smart Fuses

**IBS No. 361R • 6 Items • 42 Pcs**  
 Packaged in a clear plastic box for easy storage and organization



IBS, Inc.		ATC Standard Blade LED Smart Fuses			
Assortment No. 361R					
139222 5AMP ATC STYLE LED SMART FUSE	139224 10AMP ATC STYLE LED SMART FUSE	139225 15AMP ATC STYLE LED SMART FUSE	139226 20AMP ATC STLE LED SMART FUSE	139227 25AMP ATC STYLE LED SMART FUSE	139228 30AMP ATC STYLE LED SMART FUSE

### MAXI Blade LED Smart Fuses

**IBS No. 362R • 6 Items • 18 Pcs**  
 Packaged in a clear plastic box for easy storage and organization



IBS, Inc.		Maxi Blade LED Smart Fuses			
Assortment No. 362R					
139411 20AMP MAXI STYLE LED SMART FUSE	139412 30AMP MAXI STYLE LED SMART FUSE	139413 40AMP MAXI STYLE LED SMART FUSE	139414 50AMP MAXI STYLE LED SMART FUSE	139415 60AMP MAXI STYLE LED SMART FUSE	139416 80AMP MAXI STYLE LED SMART FUSE

ELECTRICAL



# IBS, INCORPORATED

## Automotive Electrical Q03

### Cartridge Fuses

Developed to meet the growing OEM demand for smaller components, these fuses offer high amp protection in compact packages. Most are available in amp ratings from 15 to 60A.

#### FMX FUSES







Photo	IBS No.	AMP	Color	Qty
	FMX-20	20	Blue	2
	FMX-25	25	White	2
	FMX-30	30	Pink	2

Photo	IBS No.	AMP	Color	Qty
	FMX-40	40	Green	2
	FMX-50	50	Red	2
	FMX-60	60	Yellow	2

#### FMX LOW-PROFILE FUSES







Photo	IBS No.	AMP	Color	Qty
	FMX-20LP	20	Blue	2
	FMX-25LP	25	White	2
	FMX-30LP	30	Pink	2

Photo	IBS No.	AMP	Color	Qty
	FMX-40LP	40	Green	2
	FMX-50LP	50	Red	2
	FMX-60LP	60	Yellow	2

#### FMM FUSES






Photo	IBS No.	AMP	Color	Qty
	FMM15	15	Grey	1
	FMM20	20	Blue	1
	FMM25	25	White	1

Photo	IBS No.	AMP	Color	Qty
	FMM30	30	Pink	1
	FMM40	40	Green	1

#### FMS FUSES








Photo	IBS No.	AMP	Color	Qty
	FMS-15	15	Gray	1
	FMS-20	20	Blue	1
	FMS-25	25	White	1
	FMS-30	30	Pink	1

Photo	IBS No.	AMP	Color	Qty
	FMS-40	40	Green	1
	FMS-50	50	Red	1
	FMS-60	60	Yellow	1

E  
L  
E  
C  
T  
R  
I  
C  
A  
L



### Micro Cartridge Fuses

IBS No. 823R • 24 Items • 48 Pcs

Packaged in a locking steel drawer for easy storage and organization

						Micro Cartridge Fuses																	
						Assortment No. 823R																	
<b>FMX-20</b> 20AMP BLUE MAXI FUSE JCASE  	<b>FMX-25</b> 25AMP WHITE MAXI FUSE JCASE  	<b>FMX-30</b> 30AMP PINK MAXI FUSE JCASE  	<b>FMX-40</b> 40AMP GREEN MAXI FUSE JCASE  	<b>FMX-50</b> 50AMP RED MAXI FUSE JCASE  	<b>FMX-60</b> 60AMP YELLOW MAXI FUSE JCASE  	<b>FMX-20LP</b> 20AMP BLUE LP MAXI FUSE JCASE LP - LOW PROFILE  	<b>FMX-25LP</b> 25AMP WHITE LP MAXI FUSE JCASE LP - LOW PROFILE  	<b>FMX-30LP</b> 30AMP PINK LP MAXI FUSE JCASE LP - LOW PROFILE  	<b>FMX-40LP</b> 40AMP GREEN LP MAXI FUSE JCASE LP - LOW PROFILE  	<b>FMX-50LP</b> 50AMP RED LP MAXI FUSE JCASE LP - LOW PROFILE  	<b>FMX-60LP</b> 60AMP YELLOW LP MAXI FUSE JCASE LP - LOW PROFILE  	<b>FMM15</b> 15AMP MCASE FUSE 32V GRAY  	<b>FMM20</b> 20AMP MCASE FUSE 32V BLUE  	<b>FMM25</b> 25AMP MCASE FUSE 32V WHITE  	<b>FMM30</b> 30AMP MCASE FUSE 32V PINK  	<b>FMM40</b> 40AMP MCASE FUSE 32V GREEN  	<b>FMS15</b> 15AMP MCASE FUSE 32V GRAY SLOTTED  	<b>FMS20</b> 20AMP MCASE FUSE 32V BLUE SLOTTED  	<b>FMS25</b> 25AMP MCASE FUSE 32V WHITE SLOTTED  	<b>FMS30</b> 30AMP MCASE FUSE 32V PINK SLOTTED  	<b>FMS40</b> 40AMP MCASE FUSE 32V GREEN SLOTTED  	<b>FMS50</b> 50AMP MCASE FUSE 32V RED SLOTTED  	<b>FMS60</b> 60AMP MCASE FUSE 32V YELLOW SLOTTED  
<b>FMX-20LP</b> 20AMP BLUE LP MAXI FUSE JCASE LP - LOW PROFILE  	<b>FMX-25LP</b> 25AMP WHITE LP MAXI FUSE JCASE LP - LOW PROFILE  	<b>FMX-30LP</b> 30AMP PINK LP MAXI FUSE JCASE LP - LOW PROFILE  	<b>FMX-40LP</b> 40AMP GREEN LP MAXI FUSE JCASE LP - LOW PROFILE  	<b>FMX-50LP</b> 50AMP RED LP MAXI FUSE JCASE LP - LOW PROFILE  	<b>FMX-60LP</b> 60AMP YELLOW LP MAXI FUSE JCASE LP - LOW PROFILE  	<b>FMM15</b> 15AMP MCASE FUSE 32V GRAY  	<b>FMM20</b> 20AMP MCASE FUSE 32V BLUE  	<b>FMM25</b> 25AMP MCASE FUSE 32V WHITE  	<b>FMM30</b> 30AMP MCASE FUSE 32V PINK  	<b>FMM40</b> 40AMP MCASE FUSE 32V GREEN  	<b>FMS15</b> 15AMP MCASE FUSE 32V GRAY SLOTTED  	<b>FMS20</b> 20AMP MCASE FUSE 32V BLUE SLOTTED  	<b>FMS25</b> 25AMP MCASE FUSE 32V WHITE SLOTTED  	<b>FMS30</b> 30AMP MCASE FUSE 32V PINK SLOTTED  	<b>FMS40</b> 40AMP MCASE FUSE 32V GREEN SLOTTED  	<b>FMS50</b> 50AMP MCASE FUSE 32V RED SLOTTED  	<b>FMS60</b> 60AMP MCASE FUSE 32V YELLOW SLOTTED  						
<b>FMM15</b> 15AMP MCASE FUSE 32V GRAY  	<b>FMM20</b> 20AMP MCASE FUSE 32V BLUE  	<b>FMM25</b> 25AMP MCASE FUSE 32V WHITE  	<b>FMM30</b> 30AMP MCASE FUSE 32V PINK  	<b>FMM40</b> 40AMP MCASE FUSE 32V GREEN  	<b>FMS15</b> 15AMP MCASE FUSE 32V GRAY SLOTTED  	<b>FMS20</b> 20AMP MCASE FUSE 32V BLUE SLOTTED  	<b>FMS25</b> 25AMP MCASE FUSE 32V WHITE SLOTTED  	<b>FMS30</b> 30AMP MCASE FUSE 32V PINK SLOTTED  	<b>FMS40</b> 40AMP MCASE FUSE 32V GREEN SLOTTED  	<b>FMS50</b> 50AMP MCASE FUSE 32V RED SLOTTED  	<b>FMS60</b> 60AMP MCASE FUSE 32V YELLOW SLOTTED  												
<b>FMS20</b> 20AMP MCASE FUSE 32V BLUE SLOTTED  	<b>FMS25</b> 25AMP MCASE FUSE 32V WHITE SLOTTED  	<b>FMS30</b> 30AMP MCASE FUSE 32V PINK SLOTTED  	<b>FMS40</b> 40AMP MCASE FUSE 32V GREEN SLOTTED  	<b>FMS50</b> 50AMP MCASE FUSE 32V RED SLOTTED  	<b>FMS60</b> 60AMP MCASE FUSE 32V YELLOW SLOTTED  																		



### FMX Fuse Assortment (Z02)

IBS No. 851R • 6 Items • 12 Pcs

Packaged in a locking steel drawer for easy storage and organization














### FMX Low Profile Fuse Assortment (Z02)

IBS No. 852R • 6 Items • 12 Pcs

Packaged in a locking steel drawer for easy storage and organization

						FMX Fuses					
						Assortment 851R					
<b>FMX-20</b> 20AMP BLUE MAXI FUSE JCASE  	<b>FMX-25</b> 25AMP WHITE MAXI FUSE JCASE  	<b>FMX-30</b> 30AMP PINK MAXI FUSE JCASE  	<b>FMX-40</b> 40AMP GREEN MAXI FUSE JCASE  	<b>FMX-50</b> 50AMP RED MAXI FUSE JCASE  	<b>FMX-60</b> 60AMP YELLOW MAXI FUSE JCASE  						



						FMX Low Profile Fuses					
						Assortment 852R					
<b>FMX-20LP</b> 20AMP BLUE LP MAXI FUSE JCASE LP - LOW  	<b>FMX-25LP</b> 25AMP WHITE LP MAXI FUSE JCASE LP - LOW  	<b>FMX-30LP</b> 30AMP PINK LP MAXI FUSE JCASE LP - LOW  	<b>FMX-40LP</b> 40AMP GREEN LP MAXI FUSE JCASE LP - LOW  	<b>FMX-50LP</b> 50AMP RED LP MAXI FUSE JCASE LP - LOW  	<b>FMX-60LP</b> 60AMP YELLOW LP MAXI FUSE JCASE LP - LOW  						



ELECTRICAL



# IBS, INCORPORATED

## Automotive Electrical Q03

### FMM Fuse Assortment (Z02)

IBS No. 853R • 5 Items • 30 Pcs

Packaged in a locking steel drawer for easy storage and organization

### FMS Fuse Assortment (Z02)

IBS No. 854R • 7 Items • 35 Pcs

Packaged in a locking steel drawer for easy storage and organization

E  
L  
E  
C  
T  
R  
I  
C  
A  
L

**IBS, Inc.**  
QUALITY PRODUCTS FOR MAINTENANCE & REPAIR  
INDUSTRIAL BLDG. 1, COR. W. 21<sup>ST</sup> & 19<sup>TH</sup> STS. ST. LOUIS, MO 63108

FMM Fuses

Assortment 853R

<b>FMM15</b> 15AMP MCASE FUSE 32V GRAY	<b>FMM20</b> 20AMP MCASE FUSE 32V BLUE	<b>FMM25</b> 25AMP MCASE FUSE 32V WHITE	<b>FMM30</b> 30AMP MCASE FUSE 32V PINK	<b>FMM40</b> 40AMP MCASE FUSE 32V GREEN	




**IBS, Inc.**  
QUALITY PRODUCTS FOR MAINTENANCE & REPAIR  
INDUSTRIAL BLDG. 1, COR. W. 21<sup>ST</sup> & 19<sup>TH</sup> STS. ST. LOUIS, MO 63108

FMS Fuses

Assortment 854R

<b>FMS15</b> 15 AMP MCASE FUSE 32V GRAY SLOTTED	<b>FMS20</b> 20 AMP MCASE FUSE 32V BLUE SLOTTED	<b>FMS25</b> 25 AMP MCASE FUSE 32V WHITE SLOTTED	<b>FMS30</b> 30 AMP MCASE FUSE 32V PINK SLOTTED	<b>FMS40</b> 40 AMP MCASE FUSE 32V GREEN SLOTTED	<b>FMS50</b> 50 AMP MCASE FUSE 32V RED SLOTTED

**FMS60**  
60 AMP MCASE FUSE  
32V YELLOW SLOTTED





# IBS, INCORPORATED

## Automotive Electrical Q03



### FUSE HOLDERS

Photo	IBS No.	Description	GA	Fuse Size	Mount	Electrical Connection	Qty
	139433	ATR Micro 2 Add-A-Line Fuse Holder	16	20 amp	—	—	1
	139434	ATR Micro 2 Add-A-Line Fuse Holder	16	15 amp	—	—	1
	139430	ATM Low Profile Add-A-Line Fuse Holder Adds an additional circuit to an existing circuit	16	Prim Max 25A Sec Max 15A	—	—	1
	139421	ATM Fuse Holder & Cover for ATM Mini Blade	12	30 amp	In-line	4" Lead Wires	1
	139431	ATM Fuse Holder & Cover for ATM Mini Blade	16	20 amp	In-line	4" Lead Wires	1
	139420	ATM Add-A-Line Fuse Holder Adds an additional circuit to an existing circuit	16	Prim Max 25A Sec Max 15A	—	—	1
	139428	ATM Fuse Blade Tap 3/16 Push-On Blade	—	—	—	—	25
	139447	ATM Fuse Holder Clear Covered For use with LED Smart Fuses	14	30 amp	In-line	Lead Wires	1
	139422	ATC Fuse Holder & Cover Black Inline	12	30 amp	In-line	Lead Wires	1
	139423	ATC Fuse Holder for ATC Blade	12	30 amp	In-line	4" Lead Wires	1
	139432	ATC Fuse Holder for ATC Blade	16	20 amp	In-line	4" Lead Wires	1
	139424	ATC Fuse Holder Clear Cover Cover Only for ATC Fuse Holder	—	—	Cover for 139423	—	1
	139427	ATC / ATO Add-A-Line Fuse Holder Adds an additional circuit to an existing circuit	16	Prim Max 25A Sec Max 15A	—	—	1
	139429	ATC / ATO Fuse Blade Tap 1/4 Push-On Blade	—	—	—	—	25
	19513	ATC Waterproof Fuse Holder Complete assembly with body & cap	12	30 amps	In-Line	Lead Wires	1
	972	ATC Self-Strip Fuse Holder	NA	0-20 amps	In-Line	Quick Connect 18-14 GA	25
	139450	Clear Covered ATC Fuse Holder For use with LED Smart Fuses	12	30 amp	In-Line	4" Lead Wires	1
	139425	MAXI Fuse Holder & Cover For MAXI Blade	6	60 amp	In-Line	Lead Wires	1
	0905A	Glass Tube Fuse Holder	16	0-15 amps	In-Line	Lead Wires	15
	0906A	Glass Tube Fuse Holder	12	0-30 amps	In-Line	Lead Wires	15
	HFA	Waterproof Fuse Holder	14		In-Line	Lead Wires	1
	19518	Waterproof Glass Tube Fuse Holder	12	1/4 x 1-1/4	In-Line	Lead Wires	1
	HKP	Panel Mount Glass Tube Fuse Holder 250/20A Rating	NA	1/4 x 1-1/4	Panel	Solder Term	1
	139435	J Case Fuse Holder	8	0-60AMPS	In-Line	Red GXL Wire 4" Leads	1

ELECTRICAL



# IBS, INCORPORATED

## Automotive Electrical Q03

### Automotive Fuse Holders & Accessories
















IBS No. 723R • 15 Items • 75 Pcs

Packaged in a locking steel drawer for easy storage & organization



### Automotive Fuse Holders & Accessories

Assortment No. 723R

<p>139433 ATR MICRO2 ADD A LINE FUSE HOLDER 20AMP 16GA</p> 	<p>139431 ATM 16GA IN LINE FUSE HOLDER 32V 20AMP</p> 	<p>139422 12GA ATC FUSE HOLDER &amp; COVER BLACK IN LINE</p> 	<p>19513 BLADE TYPE WATER-PROOF IN-LINE FUSE HLDR</p> 
<p>139434 ATR MICRO2 IN-LINE FUSE HOLDER 15AMP 16GA 5IN LEADS</p> 	<p>139420 ATM ADD A LINE FUSE HOLDER 32V 2 FUSE 30A</p> 	<p>139427 ATC ADD A LINE FUSE HOLDER TAP 2 ATO/ATC MAX 30A</p> 	<p>139425 MAXI IN-LINE FUSE HOLDER WITH COVER 32V 60A</p> 
<p>139430 ATM LOW PROFILE ADD-A-LINE FUSE HOLDER</p> 	<p>139447 14GA ATM FUSE HOLDER &amp; COVER CLEAR MINI</p> 	<p>139450 12GA ATC FUSE HOLDER &amp; COVER CLEAR</p> 	
<p>139421 12GA ATM IN-LINE FUSE HOLDER W/ COVER 32V 30A</p> 	<p>139428 ATM FUSE BLADE TAP .187 TAB</p> 	<p>139429 ATC FUSE BLADE TAP .250 TAB</p> 	<p>139435 FMX IN-LINE FUSE HOLDER 60AMP 8GA 4IN LEADS 58V</p> 





E  
L  
E  
C  
T  
R  
I  
C  
A  
L

### Blade-Type Circuit Breakers

Blade style circuit breakers offer interchangeability with commonly used blade-style fuses, such as ATC, ATM and MAXI. Available in several reset modes that correspond to SAE categories: SAE Type 1 (automatic reset), SAE Type II (modified reset) and SAE Type III (manual reset). Blade-style circuit breakers utilize carefully designed and manufactured snap-acting thermal elements with precious metal electrical units.


#### MINI BREAKERS

MINI BREAKERS match the blade footprint of ATM fuses. Ultra-thin, to fit in tight spaces, they're the smallest automotive circuit breakers on the market.

Photo	IBS No.	Description	AMP	Volts	Color	Qty
	<b>CB212-10</b>	<ul style="list-style-type: none"> <li>Smallest circuit breaker available</li> <li>Type II, non-cycling, modified reset - remains open as long as power is available or until load is removed.</li> </ul>	10	12	Silver	1
	<b>CB212-15</b>		15			
	<b>CB212-20</b>	<ul style="list-style-type: none"> <li>Designed to match ATM fuse footprint.</li> <li>For 12V electrical systems</li> </ul>	20	12	Tan Brown Red Blue Yellow White Green	1
	<b>CB212-25</b>		25			
	<b>CB212-30</b>		30			
	<b>CB233-05</b>		5			
	<b>CB233-7-1/2</b>		10			
	<b>CB233-10</b>		15			
	<b>CB233-15</b>		20			
<b>CB233-20</b>	25					
<b>CB233-25</b>	30					
<b>CB233-30</b>	30					

#### MAXI-STYLE BREAKERS

MAXI BREAKERS are identical in size to MAXI-style fuses. The only breakers on the market to match the MAXI's footprint and body dimensions. CB1911 can be used to replace MAXI fuses in any application.

Photo	IBS No.	Description	AMP	Volts	Color	Qty
	<b>CB1911-10</b>	Brass colored Type 1 breaker with MAXI fuse footprint. 12 Volt.	10	12	Brass	1
	<b>CB1911-20</b>		20			
	<b>CB1911-30</b>		30			
<p><b>Type 1 — Automatic Reset</b> Circuit breaker automatically resets after opening. If the fault still exists, the breaker will continue to cycle between ON and OFF positions until the overload is corrected. These devices are sometimes called "cycling breakers."</p> <p><b>Type II — Modified Reset</b> The circuit breaker will remain "tripped" (in the OFF position) as long as there's power to the circuit, or by turning off the ignition switch. These devices are sometimes called "non-cycling breakers."</p>						



# IBS, INCORPORATED

## Automotive Electrical Q03

### Blade-Type Circuit Breakers

#### ATC-STYLE BREAKERS

ATC STYLE BREAKERS are designed to fit ATC style fuse panels. These ATC breakers are the thinnest available in the aftermarket and comply with SAE standard J553.

Photo	IBS No.	Description	AMP	Volts	Color	Qty
	<b>CB221-10</b>	<ul style="list-style-type: none"> <li>Type I automatic reset</li> <li>Auto reset until load is corrected</li> <li>12V electrical systems</li> <li>Matches ATO / ATC fuses</li> </ul>	10	12	Brass	1
	<b>CB221-15</b>		15			
	<b>CB221-20</b>		20			
	<b>CB221-30</b>		30			
	<b>CCB-25</b>	Replaces OE Part 4527053. Available in 25 AMP Type I	25	12	Silver	1
	<b>CB222-10</b>	<ul style="list-style-type: none"> <li>Type II non-cycling modified reset, remains open as long as power is available, or until load is removed.</li> <li>For 12V electrical systems</li> <li>Matches ATO / ATC fuses</li> </ul>	10	12	Silver	1
	<b>CB222-15</b>		15			
	<b>CB222-20</b>		20			
	<b>CB222-30</b>		30			
	<b>CB223-10</b>	<ul style="list-style-type: none"> <li>Type III ATC Circuit Breakers</li> <li>24V electrical systems</li> <li>Complies with SAE J553.</li> <li>Matches ATO / ATC fuses</li> </ul>	10	24	Silver	1
	<b>CB223-15</b>		15			
	<b>CB223-20</b>		20			
	<b>CB223-25</b>		30			
	<b>CB223-30</b>		30			
	<b>CB227-10</b>	<ul style="list-style-type: none"> <li>Type III ATC Low Profile Circuit Breakers</li> <li>Complies with SAE J553 and SAE J1171 for ignition protection.</li> </ul>	10	12	Red Blue Yellow White Green	1
	<b>CB227-15</b>		15			
	<b>CB227-20</b>		20			
	<b>CB227-25</b>		25			
	<b>CB227-30</b>		30			
	<b>CBB-30</b>	Type II circuit breakers can be used to replace ATC fuses 12 volt. Available in 30 AMP.	30	12	Silver	1
	<b>FCB-20</b>	Replaces OE part D9AB-14526-BA. Available in 20 AMP Type II.	20	12	Silver	1



#### UCB BREAKERS

UCB BREAKERS feature "snap off" universal blades which can easily be sized to fit applications where fuseblock spacing is tight, or the fuse terminal is recessed.

Photo	IBS No.	Description	AMP	Volts	Color	Qty
	<b>UCB-10</b>	Universal Type 1 Circuit Breaker 12 Volt	10	12	Red	1
	<b>UCB-15</b>	Universal Type 1 Circuit Breaker 12 Volt	15	12	Blue	1
	<b>UCB-20</b>	Universal Type 1 Circuit Breaker 12 Volt	20	12	Gold	1
	<b>UCB-25</b>	Universal Type 1 Circuit Breaker 12 Volt	25	12	Silver	1
	<b>UCB-30</b>	Universal Type 1 Circuit Breaker 12 Volt	30	12	Green	1

ELECTRICAL

### Stud Mount Circuit Breakers

Photo	IBS No.	Description	AMP	Volts	Color	Qty
	<b>CBC-15B</b>	Heavy Duty Type 1 - 12 Volt breaker. Two 10-32 threaded studs and brass plated battery terminal.	15	12	Brass	1
	<b>CBC-20B</b>		20			
	<b>CBC-30B</b>		30			
	<b>CBC-40B</b>		40			
	<b>CBC-50B</b>		50			
<b>Type 1 — Automatic Reset</b> Circuit breaker automatically resets after opening. If the fault still exists, the breaker will continue to cycle between ON and OFF positions until the overload is corrected. These devices are sometimes called "cycling breakers."						
	<b>CBF-20</b>	Type II - 12 volt breaker. CBF circuit breakers can be used to replace glass fuses in 1/4 x 1-1/4 fuse blocks.	20	12	Black	1
	<b>CBF-30</b>		30			
	<b>CBS-10</b>	Standard duty Type II - 12 Volt breaker. Two 10-32 threaded studs.	10	12	Silver	1
	<b>CBS-15</b>		15			
	<b>CBS-20</b>		20			
	<b>CBS-25</b>		25			
	<b>CBS-30</b>		30			
<b>Type II — Modified Reset</b> The circuit breaker will remain "tripped" (in the OFF position) as long as there's power to the circuit, or by turning off the ignition switch. These devices are sometimes called "non-cycling breakers."						

### Stud-Mount Fuses

AMG fuses are for high current applications on select late model vehicles and available in ratings from 80 to 500 A. Use with the HMEG fuse block.



IBS No.	AMP	Qty	IBS No.	AMP	Qty
<b>AMG60</b>	60	1	<b>AMG200</b>	200	1
<b>AMG80</b>	80	1	<b>AMG250</b>	250	1
<b>AMG100</b>	100	1	<b>AMG300</b>	300	1
<b>AMG125</b>	125	1	<b>AMG400</b>	400	1
<b>AMG150</b>	150	1	<b>HMEG</b>	FUSE BLOCK	



### Fusible Links

Used primarily in Japanese designed car models to provide wiring harness protection. Available in the following styles:



FEMALE FUSIBLE LINKS		
IBS No.	AMP	Qty
<b>FLF-20</b>	20	1
<b>FLF-30</b>	30	1
<b>FLF-40</b>	40	1
<b>FLF-50</b>	50	1
<b>FLF-60</b>	60	1

MALE FUSIBLE LINKS		
IBS No.	AMP	Qty
<b>FLM-30</b>	30	1
<b>FLM-60</b>	60	1
<b>FLM-80</b>	80	1







# IBS, INCORPORATED

## Assortments Z02

### Automotive Circuit Breakers ATM & ATC Assortment

IBS No. 824R • 31 Items — 46 Pieces

Packaged in a locking steel drawer for easy storage & organization

IBS, Inc. SPECIALTY PRODUCTS FOR MAINTENANCE & REPAIR INDUSTRIALBOLT.COM 800-678-1906		Automotive Circuit Breakers ATM & ATC						Assortment No. 824R
CB212-10 10AMP ATM MINI CIRC BREAKER II	CB212-15 15AMP ATM MINI CIRCUIT BREAKER II	CB212-20 20AMP ATM MINI CIRC BREAKER II	CB212-25 25AMP ATM MINI CIRC BREAKER II	CB212-30 30AMP ATM MINI CIRC BREAKER II	CB233-05 5AMP ATM MINI RESET CB TYPE III	CB233-10 10AMP ATM MINI RESET CB TYPE III	CB233-15 15AMP ATM MINI RESET CB TYPE III	
CB233-20 20AMP ATM MINI RESET CB TYPE III	CB233-25 25AMP ATM MINI RESET CB TYPE III	CB233-30 30AMP ATM MINI RESET CB TYPE III	CB221-10 10AMP ATC CIRCUIT BREAKER TYPE 1	CB221-15 15AMP ATC CIRCUIT BREAKER TYPE 1	CB221-20 20AMP ATC CIRC BREAKER TYPE 1	CB221-25 25AMP ATC CIRCUIT BREAKER TYPE 1	CB221-30 30AMP ATC CIRCUIT BREAKER TYPE 1	
CB223-10 10AMP ATC 24V RESET CB TYPE III	CB223-15 15AMP ATC 24V RESET CB TYPE III	CB223-20 20AMP ATC 24V RESET CB TYPE III	CB223-25 25AMP ATC 24V RESET CB TYPE III	CB223-30 30AMP ATC 24V RESET CB TYPE III	CB227-10 10AMP ATC RESET CB TYPE III RED	CB227-15 15AMP ATC RESET CB TYPE III BLUE	CB227-20 20AMP ATC RESET CB TYPE III YELLOW	
CB227-25 25AMP ATC RESET CB TYPE III WHITE	CB227-30 30AMP ATC RESET CB TYPE III GREEN	UCB-10 10AMP ATM CB SNAP OFF BLADES	UCB-15 15AMP ATM CB SNAP OFF BLADES	UCB-20 20AMP ATM CB SNAP OFF BLADES	UCB-25 25AMP ATM CB SNAP OFF BLADES	UCB-30 30AMP ATM CB SNAP OFF BLADES		

### Heavy Duty Truck Circuit Breakers Assortment

IBS No. 340R • 26 Items — 26 Pieces

Packaged in a locking steel drawer for easy storage & organization



IBS, Inc. SPECIALTY PRODUCTS FOR MAINTENANCE & REPAIR INDUSTRIALBOLT.COM 800-678-1906		Heavy Duty Truck Circuit Breakers						Assortment No. 340R
CB1911-10 10AMP MAXI BREAKER	CB1911-20 20AMP MAXI BREAKER	CB1911-30 30AMP MAXI BREAKER	CB212-10 10AMP ATM MINI CIRCUIT BREAKER	CB212-15 15AMP ATM MINI CIRCUIT BREAKER	CB212-20 20AMP ATM MINI CIRCUIT BREAKER	CB212-25 25AMP ATM MINI CIRCUIT BREAKER		
CBC-15B 15AMP STUD MOUNTED	CBC-20B 20AMP STUD MOUNTED	CBC-30B 30AMP STUD MOUNTED	CBC-40B 40AMP STUD MOUNTED	CBC-50B 50AMP STUD MOUNTED	CCB-25 25AMP CIRCUIT BREAKER OE#	FCB-20 20AMP CIRCUIT BREAKER OE#		
UCB-10 10AMP UNIVERSAL CIRCUIT	UCB-15 15AMP UNIVERSAL CIRCUIT	UCB-20 20AMP UNIVERSAL CIRCUIT	UCB-25 25AMP UNIVERSAL CIRCUIT	UCB-30 30AMP UNIVERSAL CIRCUIT	CBF-20 20AMP CIRCUIT BREAKER-GLASS	CBF-30 30AMP CIRCUIT BREAKER-GLASS		
CB221-10 10AMP ATC BLADE BREAKER TYPE 1	CB221-15 15AMP ATC BLADE BREAKER TYPE 1	CB221-20 20AMP ATC BLADE BREAKER TYPE 1	CB221-30 30AMP ATC BLADE BREAKER TYPE 1	CBB-30 30AMP ATC STYLE CIRCUIT				

ELECTRICAL

### Electronic Signal Flashers — Extended Life

Tridon's Extended Life Super Duty Electronic Signal Flashers last up to 9 times longer than conventional thermal flashers. Designed for use with trucks, buses, RVs, taxis and passenger cars, they are built tough with heavy duty components throughout.

- Thick Palladium Contact provides longer life under heavy loads.
- Faster Start Time — Only .75 seconds to first flash as compared to 1.5 seconds with ordinary flashers.
- Dependability — Has few moving parts and a thermoplastic cover to help protect the flashers from temperature extremes (-25°F to 145°F).
- Highly audible — Clear distinctive audible signal can be heard in any traffic situation.
- Highly durable — Average life is 800 hours at 10 lamps. Exceeds DOT and SAE specifications J590 and J945 by a factor of 2:1.
- Highly Efficient — Incorporates a positive electromechanical relay in contrast to thermal flashers to achieve the most constant regulated timing of any flasher.



IBS No.	Description	Load	Max. Watts	FPM	Durability (Cycling)	Qty
EL-12	12V - 2 Pin	1 - 10	250	70-100	200 hrs	1
EL-13	12V - 3 Pin	1 - 10	250	70-100	200 hrs	1
EL-13A	12V - 3 Pin Alt*	1 - 6	150	85	150 hrs	1

*\*EL-13A is an alternating flasher that alternates from side to side.*

### Heavy Duty Flashers



#### FLASHERS

DOT Approved • Variable Load

IBS No.	Volts	No. of Terminals	No. of Bulbs	MAX Amps	Qty
EL550	20	3	1 - 6	12.8	1
EL552	30	2	2 - 6	12.8	1

### 5 Prong Relay



- The best solution for full voltage applicable to head lamps, fog horns, motors for fans, window lifters, air conditioners, heated rear windows, etc.
- Engineered to deliver superior performance over a long life.
- Permissible ambient temperature - 40°C to 85°C.
- Mechanical life — no load = 1,000,000 cycles at +85°C.
- 12 volt; 30/50 amp.

IBS No.	Description	Qty
73984	12V 30/50 AMP 5 Prong Relay	1

ELECTRICAL



# IBS, INCORPORATED

## Automotive Electrical Q03

E  
L  
E  
C  
T  
R  
I  
C  
A  
L

### Test Clips

- Cadmium plated steel.
- Full meshing teeth.

IBS No.	Jaw Opening	AMP Rating	Qty
1587A	3/16	—	25
1588A	3/8	—	25
0836A	3/4	25	5
0837A	1-1/16	50	5



### Spiral Wrap



Expandable spiral cut polyethylene wrap. Wires can enter and break out at any point. Retains strength under repeated flexing. Operating temperature -105°F to 215°F.

IBS No.	Color	I.D.	Length	Qty
5119A	Natural	3/16	100 ft.	1
5120A	Natural	1/4	100 ft.	1
5121A	Natural	3/8	100 ft.	1
5122A	Natural	1/2	100 ft.	1
5123A	Natural	3/4	100 ft.	1
5124A	Natural	1	100 ft.	1
6219A	Black	3/16	100 ft.	1
6220A	Black	1/4	100 ft.	1
6221A	Black	3/8	100 ft.	1
6222A	Black	1/2	100 ft.	1

### Fabric Loom



IBS No.	Size	Length	Qty
8212S	3/16	50 ft.	1
8213S	1/4	50 ft.	1
8214S	3/8	50 ft.	1
8215S	1/2	50 ft.	1
8216S	5/8	50 ft.	1
8218S	1	50 ft.	1

Tough, flexible loom. Smooth inside for easy wire insertion. Saturated with an asphalt compound for moisture proofing. Non-metallic material protects against short circuits and undesirable noise.

### Convuluted Tubing (Split Loom)



IBS No.	Size	Length	Qty
5140A	1/4	50 ft.	1
5141A	3/8	50 ft.	1
5142A	1/2	50 ft.	1
5143A	3/4	50 ft.	1

Flexible black polyethylene tubing for holding wires in position and protecting them from abrasion. Tubing is split for easy wire insertion. Operating temperature -30°F to +200°F.

### Split Braided Sleeving



IBS No.	Size	Length	Qty
19040	1/4	75 ft.	1
19041	3/8	75 ft.	1
19042	1/2	50 ft.	1
19043	3/4	50 ft.	1
19044	1	25 ft.	1

Made from semi-rigid 10 mil Polyethylene braid; its lightweight, quiet & flexible. A lateral split accommodates a wide variety of bundling needs. 25% edge overlap allows for coverage around inline plugs, connectors & splices. Add and remove wires without disassembly. Retains shape & rigidity from -94°F to 257°F.

### Split Tubing & Sleeve Installation Tool

- Insert your wire bundle into the shank.
- Slide the tool along the split in the sleeving.
- Watch as the tool deposits the wires and closes the split.



IBS No.	Size	Qty
19045	1/4 - 3/8	1
19046	1/2	1
19047	3/4	1
19048	1	1



### Procell Alkaline Batteries

- Provides 1.5 volts, 6 volts and 9 volts.
- Good low temperature characteristics.
- Recommended for heavy drain items which get frequent use i.e. flashlights, calculators, lanterns, etc.
- Good long-lasting power source.




IBS No.	Cell	Pkg Qty	Case Qty
EN95	D	12	72
EN93	C	12	72
EN96	AAAA	2	12
EN92	AAA	12	144
EN91	AA	12	144
EN22	9V	6	72
EN29	6V lantern	1	12
LR41	1.5V	1	—
LR44	LED Safety Glasses	1	6
CR2032	3V	1	6
CR2450	3V	1	36
CR123A	3V	1	12

### Procell Alkaline Batteries Assortment (Z02)

IBS No. 395R • 5 Items • 46 Pcs

Packaged in a locking steel drawer for easy storage & organization

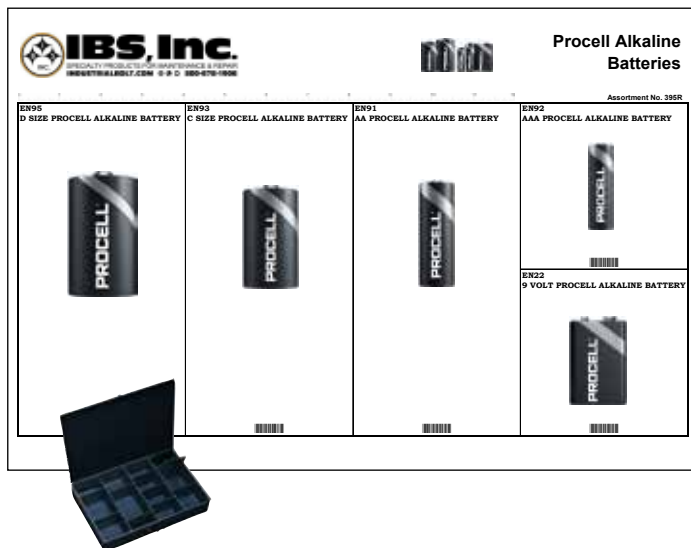

### Rough Service Light Bulbs

Supreme Special Filament



- Designed exclusively for the automotive industry.
- Bulbs have 9 filament supports plus a thicker, shorter stem for the supports. This provides twice the resistance to the type of shock that destroys filaments in common bulbs.
- Guaranteed long-life bulbs.
- Brass based eliminates "freezing" or corroding in the socket — allowing easier removal.
- Made in the USA.

ROUGH SERVICE BULBS

TOUGH COAT BULBS

IBS No.	Watts	Pkg Qty	IBS No.	Watts	Pkg Qty
75A/RS	75	4	75A/STC	75	4
100A/RS	100	4	100A/STC	100	4

### Procell Alkaline Batteries Assortment (Z02)

IBS No. 746R • 5 Items • 30 Pcs

Packaged in a locking plastic tray for easy storage & organization



ELECTRICAL



# IBS, INCORPORATED

## Miscellaneous Items Q3F

E  
L  
E  
C  
T  
R  
I  
C  
A  
L

### Professional 50' Quad Tap Retractable Reel 15 AMP



IBS No.	Case Qty	Case Wt.	Cord Length	Cord GA	Cord Jacket
136111	1	17 lbs	50 ft	12/3	SJTW

- 40% larger cord reel with smooth glide rewind.
- Polarized plug with four 15 AMP grounded receptacles.
- Resettable 15 AMP circuit breaker.
- LED power status light.
- Mounting brackets included.
- Heavy Duty 12/3 Cord.

### Pro 1200 Lumen LED Worklight On 50' Retractable Metal Reel



IBS No.	Case Qty	Case Wt.	Cord Length	Cord GA	Cord Jacket
136641	1	8 lbs	50 ft	18/2	SVTW
136642	Replacement Head (136641 & 137681)				



- All LED construction and 18/2 SVTW cord make this a lightweight and virtually indestructible work light ideal for most work environments.
- Worklight has two brightness settings of 1,200 and 600 Lumens make this light perfect for lighting up a large area.
- Two built-in magnets with a detachable magnetic hook, one at the balance point in the middle of the handle, and the other at the tip of the light offer hands free options for convenience and added value.
- Octagonal shaped handle keeps the floodlight aimed in the correct direction when set on its side for extra convenience and safety.
- Includes a mounting bracket allowing the reel to be attached to the wall or ceiling for safety and convenience.
- 1 year limited warranty.

### Pro 1200 Lumen LED Worklight With 25' Cord



IBS No.	Case Qty	Case Wt.	Cord Length	Cord GA	Cord Jacket
137681	1	1 lbs	25 ft	18/2	SJTW

- All LED construction and 18/2 SVTW cord make this a lightweight and virtually indestructible work light ideal for most work environments.
- Worklight has two brightness settings of 1,200 and 600 Lumens make this light perfect for lighting up a large area.
- Two built-in magnets with a detachable magnetic hook, one at the balance point in the middle of the handle, and the other at the tip of the light offer hands free options for convenience and added value.
- Octagonal shaped handle keeps the floodlight aimed in the correct direction when set on its side for extra convenience and safety.
- 25' cord is the perfect length for easy storage and yet reaches places where needed.
- 1 year limited warranty.

### Under-Hood Worklight



IBS No.	Pkg Qty	Description
138516	1	Under-Hood Worklight

- Adjustable carrier system extends to 77 inches to fit across most automotive hoods.
- Can be used with or without the carrier.
- Magnetic ends for easy, multi-positioning housing.
- Hanger hooks add mounting versatility.
- Housing is chemical, moisture and impact-resistant to stand up to the toughest situations and applications.
- Dual power mode runs up to 4-1/2 hours on full power, or 8-1/2 hours on half power.
- 120 premium LEDs deliver up to 35,000 hour life.
- Includes internal battery pack with AC and car chargers.
- 51" L x 4" W x 7" H.
- Lumens: 1200 at full-power, 650 at half-power



# IBS, INCORPORATED

## Miscellaneous Items Q3F



### Omni 3K Worklight 3000 Lumens



The OMNI 3K is the ultimate omni-directional work light and once you've used it, you will wonder how you ever lived without it! It is powerful, yet compact measuring just 7" x 5-3/8".

- **3000 lumens** of light with a dual COB output.
- **Fully Rotatable** — the dual panels rotate 360°, directing light to any angle.
- **Handle** — single handle that swivels, making it easier to adjust and direct.
- **Mounting** — Strong magnetic handle attaches to any metal surface or **universal 1/4-20 female thread** allows for mounting to standard tripods.
- **Water Resistant** — IPX4 Water Resistant means it can resist a sustained, low-pressure water jet spray.
- **Rechargeable** — Fast USB-C charging.
- **Red Light Mode** — Helps eyes to quickly adjust and adapt for night vision.
- **Back-Up Battery** — use to charge USB devices with a 4,000mAh power bank.

IBS No.	Description
136647	Omni 3K Worklight

### LED Work Light

- Single light fixture producing 2,200 lumens of light from a single 20W LED.
- Multi-angle tilt and swivel fixture design.
- Multi-fin heat-sink keeps light cool to the touch.
- LED is rated at 50,000 hours of life.
- Comfort grip padded handle.
- Single sealed push button switch.
- Tempered glass lens.
- 6 ft SVT, 18/3 cord with grounded plug.
- Powder coated for long wear.
- Impact, chemical and water resistant design.



IBS No.	Description
201711	LED Work Light

### Omni 2K Worklight 2000 Lumens

The OMNI 2K is an omni-directional work light that boasts a powerful 2,000 lumen, Dual C•O•B output with a red hazard feature. The OMNI features magnetic handles to provide convenient carry, magnetic attachment or a sturdy base for hands-free light. Each C•O•B panel and magnetic handle rotate to give light everywhere that you need it, and the dimmer controls give you the right amount of light. Completely rechargeable, the OMNI 2K also features a power bank to charge your USB powered devices.

- **USB-C rechargeable.**
- **4,000mAh** power bank
- **Rotating magnetic handles**
- **Rotating C•O•B panels**
- **Water and impact resistant**
- **Non-slip rubber coating**
- **Battery charging indicator**
- **Rear-positioned ON/OFF button** and 2 buttons for adjustable brightness
- **USB-C charging cable** included
- **Powered by internal rechargeable battery** (Recharge time: 2 - 8 hours).
- **Folded size:** (H) 4.8" x (W) 6.25" x (D) 1.875", 0.5 lbs.



IBS No.	Description
202013	Omni 2K Worklight

### Rechargeable LED Area Worklight WITH MAGNETIC BASE

- High/Low brightness modes.
- 1000 lumens on high.
- 500 lumens on low.
- Constructed from lightweight 6061-T6 aluminum.
- Multi-angle tilt and swivel fixture design.
- Powerful magnetic base for hands-free operation.
- Multi-fin heat sink keeps light cool to the touch.
- LED is rated at 50,000 hours of life.
- Adjustable comfort-grip handle.
- Single sealed push button switch.
- Tempered glass lens.
- Powder coated for long wear.
- IP-X7 rated waterproof
- Impact and chemical resistant design
- Meets requirements of NFPA-1971-8.6 (2013)
- Rechargeable Li-ion
- Includes AC & DC power supplies
- 1 Year limited warranty.



IBS No.	Description
136645	Rechargeable LED Area Worklight with Magnetic Base

ELECTRICAL



# IBS, INCORPORATED

## Miscellaneous Items Q3F

ELECTRICAL

### Dual Function Flood / Flashlight with Magnet & Stand

- 150 lumens flashlight
- 120 lumens floodlight
- 270 lumens dual-light
- 4 AA batteries included
- Multifunction — Flashlight / Floodlight / Dual-Light.
- Oval shape and non-slip textured body for easier and safer handling.



IBS No.	Pkg Qty	Description
138515	1	Dual Function Flood/Flashlight with Magnet & Stand

### BAT Flashlight

- 1,500 Lumen High-Power LED
- 6 AA batteries included
- Aircraft grade anodized aluminum; water and impact resistant
- Rubberized protective sleeve
- Ergonomic textured handle



IBS No.	Pkg Qty	Description
138523	1	The BAT Flashlight

### Joey Flashlight XL

- 300 lumens worklight
- 520 lumens flashlight
- AA batteries included
- Multifunction Flashlight, Worklight & Signal Light.
- Magnetic Base
- 3 Lighting Modes
  - High Intensity Flashlight
  - Magnetic Worklight
  - Red Signal Light Magnetic Base
- Magnetic Base



IBS No.	Pkg Qty	Description
138528	1	IBS Joey Flashlight XL

### LED Dual-Light Headlamp

- 55 lumens spotlight
- 40 lumens floodlight
- 80 lumens dual-light
- 3 AAA batteries included
- Adjustable elastic headband with rubberized strips keep the headlamp in place
- Headlamp tilts for optimum light positioning
- IP-X7 rated waterproof



IBS No.	Pkg Qty	Description
138524	1	LED Dual-Light Headlamp

### Cordless Rechargeable Multi-Purpose LED Work / Flood Light With AC & DC Chargers & Magnet Hooks



- Dual-brightness Floodlight – 600/225 Lumens for optimum battery control and life.
- Three heavy-duty integrated magnets, one at the tip of the light, one at the mid-point of the body and one built into the base for multiple hands free uses.
- Magnetic hook can be attached to either the body or tip magnets and can be rotated 360 degrees for even more hands-free versatility.
- Octagonal body design keeps the light in place when laid on its side for extra convenience and safety.
- Flat bottom design allows the light to stand up and directed to where the light is needed for added value.
- User-replaceable lens saves money on replacing the entire light when the lens is damaged.
- Water resistant makes this light perfect for indoor and outdoor use.
- Impact & chemical resistant means the light is durable enough to use in most work environments.
- Powered by integrated Lithium-ion battery for optimum life with no “battery memory” for easy charging.
- Includes both AC & DC power supply/charger means this light can be used in the shop or on the road.
- 1 Year Limited Warranty

IBS No.	Pkg Qty	Description
138511	1	Cordless Rechargeable Multi-purpose LED Work Flood Light
138511LENS	1	Replacement Lens

### Intrinsically Safe LED Flood/Flashlight

- 55 lumens spotlight
- 40 lumens floodlight
- 80 lumens dual-light
- 3 AAA batteries included
- Adjustable elastic headband with rubberized strips keep the headlamp in place
- Headlamp tilts for optimum light positioning
- IP-X7 rated waterproof



IBS No.	Pkg Qty	Description
138520	1	Intrinsically Safe LED Dual Function Flood/Flashlight



### Fluorescent Work Light Replacement Bulbs



#### 26W FLUORESCENT WORKLIGHT REPLACEMENT BULB

IBS No.	Case Qty	Case Wt.	Watts	Used With
121017	12	1.6 lbs	26W	IBS No. 136022 IBS No. 136155



#### 13W FLUORESCENT WORKLIGHT REPLACEMENT BULB

IBS No.	Case Qty	Case Wt.	Watts	Used With
121016	12	1.5 lbs	13W	IBS No. 121012 IBS No. 137689



#### 12V 13W FLUORESCENT WORKLIGHT REPLACEMENT BULB

IBS No.	Case Qty	Case Wt.	Watts	Used With
123151	12	1.5 lbs	13W	IBS No. 123149 IBS No. 137686


### Halogen Work Light Replacement Bulb



#### 500W HALOGEN WORKLIGHT BULB REPLACEMENTS

IBS No.	Case Qty.	Case Wt. (lbs)	Used With	Package
136104	12	1.5	IBS No. 136106	Clamshell

### Accessories



#### MALE REPLACEMENT PLUG - 3 WIRE

IBS No.	Case Qty.	Case Wt. (lbs)	Description
137687	6	3	Male Plug



#### FEMALE REPLACEMENT PLUG - 3 WIRE


IBS No.	Case Qty.	Case Wt. (lbs)	Description
137688	6	3	Female Plug

### Replacement Parts



#### REPLACEMENT PARTS FOR 26W FLUORESCENT LIGHT

IBS No.	Description	Pkg	Use with
137916	Replacement Head	Box	136155
138000	Replacement Lens	Box	136155

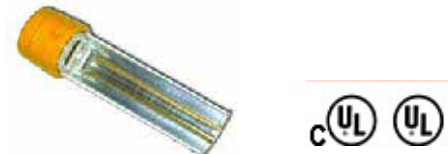

#### REPLACEMENT TUBE ASSEMBLY FOR 13W WORKLIGHTS

IBS No.	Size	Pkg	Use with
137998	13W	Bag	121012, 123149, 137686



#### REPLACEMENT DOUBLE HOOKS FOR TUBE LIGHTS

IBS No.	Description	Pkg	Use with
138001	Double Hooks	Box	13W Lights

ELECTRICAL



# IBS, INCORPORATED

## Miscellaneous Items Q3F

E  
L  
E  
C  
T  
R  
I  
C  
A  
L

### IBS DualGlow Extension Cords



LIGHTED ENDS  
INDICATE  
WHEN POWER  
IS PRESENT



#### IBS DUALGLOW EXTENSION CORDS 25', 50' & 100 FT SINGLE TAP


IBS No.	Cord Length	Cord GA	Cord Jacket
141478	25 ft	12/3	SJTW 15A Rated
139641	50 ft	12/3	SJTW 15A Rated
139642	100 ft	12/3	SJTW 15A Rated

- Contractor Grade / Professional Quality
- Features CGM (Continuous Current and Ground Monitoring, which means each female plug has a green neon light that indicates there is ground continuity — an OSHA Safety Requirement.
- Molded stress collar prevents the cord from pulling out providing additional strength and longevity.
- Male plugs feature an amber neon light indicating the presence of power in the cords and outlet.
- Patented 2-way, non-slip finger grips makes connecting and disconnecting easier and faster saving time and preventing faulty connections.
- Superior cold weather jacket provides flexibility in freezing temperatures as low as -40°F, making unraveling and storing cords easier and faster.
- High visibility improves safety and productivity, helps prevent on the job injuries — saving time and money.
- 12/3 ga wire provides maximum connectivity that can handle large, industrial tools without overheating or tripping breakers.

### IBS Pro-Lock Extension Cords



#### PRO-LOCK DUALGLOW MOLDED EXTENSION CORDS 50' & 100 FT SINGLE TAP

IBS No.	Cord Length	Cord GA	Cord Jacket / Color
139646	50 ft	10/3	SJTW / <b>Blue</b> 15A Rated
139647	100 ft	10/3	SJTW / <b>Blue</b> 15A Rated
139643	50 ft	12/3	SJTW / <b>Orange</b> 15A Rated
139644	100 ft	12/3	SJTW / <b>Green</b> 15A Rated
139645		10/3 to 12/3	Extension Cord End Only

- Contractor Grade / Professional Quality
- Features the exclusive Pro-Lock Connector - Click to Lock up to 80lbs tensile strength means ends won't pull apart.
- Safely locks your cords together, keeps equipment connected without dangerous cord tying, which provides for a safer and more productive work environment, saving time and money.
- With the quick release collar, cords with Standard 3 prong 15A-125V ends won't pull apart and are easy to connect and disconnect when needed for a safe and continuous connection.
- Both male and female plugs feature power check lighted ends indicating the presence of power in the cords and outlet for safer operation.
- Superior cold weather jacket provides flexibility in freezing temperatures as low as -40°F, making unraveling and storing cords easier and faster.
- High visibility improves safety and productivity, helps prevent on the job injuries — saving time and money.
- 10/3 and 12/3 ga wire provides maximum connectivity that can handle large, industrial tools without overheating or tripping breakers.
- **UL, cUL listed.**



# IBS, INCORPORATED

## Miscellaneous Items Q3F



### GFCI INLINE TRIPLE TAP CORD

IBS No.	Type	Cord Length	Cord GA	Cord Jacket
141438	GFCI	12/3	SJTW 15A Rated	SJTW 15A Rated

- Contractor Grade / Professional Quality
- Fast acting circuit breaker designed to shut-off electrical power in the event of a ground fault in as little as 1/4 of one second.
- Oil-resistant jacket remains flexible even at sub-zero temperatures.
- Ideal for use during maintenance, remodeling, or repair of buildings, structures or equipment.
- High visibility yellow for added safety.
- Lighted receptacle for added safety.
- Grounded receptacle.
- Meets OSHA Regulation 1910.304.

### Lighted Adapters



#### LIGHTED PLUG ADAPTER SINGLE TAP

IBS No.	Pkg Qty	Pkg	Description
141436	5	Bag	3 to 2 Lighted Adapter

- Converts a single 15 AMP 125 Volt grounded outlet.
- Lighted end indicates power is on.
- 1875 Watt.
- UL approved.



#### LIGHTED PLUG ADAPTER TRIPLE TAP

IBS No.	Pkg Qty	Pkg	Description
141437	2	Bag	Lighted Adapter Triple Outlet

- Converts a single 15 AMP 125 Volt grounded outlet to three 15A, 125V U-ground outlets.
- Lighted end indicates power is on.
- 1875 Watt.
- UL approved.

### Silver Bearing Solder (S05)

#### Low Temperature

The highest strength, lowest melting point silver solder alloy for stainless steel, dissimilar metals and chrome plating.

- 500% stronger than common solders.
- Superior corrosion resistance with bright, shiny deposits.



IBS No.	Description	Qty
46001	1 oz. syringe	1
46000	9 ft. x 1/16 coil, acid core 96.5% tin - 3.5% silver	1

### Silvabrite 100® Solder (S05)

#### Lead Free

Silvabrite 100® was developed to meet market demands for a safe and easy-to-use solder for drinking water systems and other applications. Silvabrite 100® is a lead-free and antimony free, non-toxic solder which contains the same metals used in dental fillings.

#### Features/Benefits:

- Lead-free composition — safe for use in drinking water systems.
- Low melting point — excellent penetration, flow and wetting out action means fast application and less waste.
- Wide melting range — 440°F to 500°F for maximum control.
- Excellent "capping off" ability.
- Tin, copper and silver composition — provides higher shear, creep and tensile strength than 50/50 for strong corrosion resistant leak-tight joints.



IBS No.	Description	Qty
460013	1/8 X 1# spool	1

ELECTRICAL





# IBS, INCORPORATED

## Vinculum S05

E  
L  
E  
C  
T  
R  
I  
C  
A  
L

### 60/40 Rosin Core Solder Most Popular Solder for Electrical Applications

- Rosin flux is completely non-corrosive and non-conductive.
- Quick acting rosin flux dissolves surface oxides for good wetting and strong connections.
- Meets Fed. Spec. QQ-S-571
- 60% Tin / 40% Lead.
- Made in the USA



IBS No.	Description	Qty
46044	.031 x 1# Spool	1
46045	.062 x 1# Spool	1
46046	.093 x 1# Spool	1

### NOKORODE® Regular Paste Flux

Will not freeze or decompose. No odor. Lead free. Recommended for use on all solder alloys including 95/5 and all lead-free solders. Meets specification O-F-506, Type 1A and A-A-51145, MIL-F04995-2.



IBS No.	Description	Qty
460014	1.7 oz. jar	1

### 60/40 Rosin Core Solder & Excalibur Torch Assts (Z08)

Each size of 60/40 Rosin Core Solder combined with an Excalibur Torch.

#### Excalibur Torch

A self-igniting and cordless soldering iron, hot air blower, and butane torch complete in 1 great tool! The Piezo electric ignition system provides a quick start-up in any mode.

Includes 5 interchangeable tips: 1 Reflector, 1 Hot Air Blower, 1 Hot Knife, 1 3.5mm Chisel Tip, and 1 3mm Diagonal Tip. One tube of solder is also included.

Includes a handy, impact-resistant travelling case for complete mobility, moves easily from the workshop to the field.



IBS No.	Description
690P	.031 x 1# Spool with Excalibur Torch
691P	.062 x 1# Spool with Excalibur Torch
692P	.093 x 1# Spool with Excalibur Torch
141060	Excalibur Torch Set

### Butane Refill



- Universal tip fuels most leading butane lighters.
- Low in non-volatile contaminants which can cause burner valve to clog, affecting flame height and function.

**WARNING: USE THIS PRODUCT ONLY AS DIRECTED ON THE PACKAGE. INTENTIONAL MISUSE BY DELIBERATELY CONCENTRATING & INHALING THE CONTENTS MAY BE HARMFUL OR FATAL. KEEP OUT OF REACH OF CHILDREN.**

IBS No.	Description	Qty
95007	Butane Refill	1

### Solder Combo Assortments (Z08)

One of our bestselling assortments just got better! Solder combos available in any combination — 2 of our Low Temperature Silver Bearing Solder in coil, paste, or one of each and includes the new **MICROTORCH BUTANE TORCH!**

#### MICROTORCH BUTANE TORCH

IBS No. 125738 (T03)

Retail Value \$39.95

At only 5-1/4" high with a 2500°F flame, the **MICROTORCH** is ideal for all types of professional use. Refillable with premium grade Butane Refill. (IBS No. 95007 - T03).

Low temperature silver bearing soft solder — the highest strength, lowest melting point silver solder alloy for stainless steel, dissimilar metals and chrome plating, available in coil, or syringe paste.

- 500% stronger than common solders.
- Superior corrosion resistance with bright, shiny deposits.



IBS No.	Description	Qty
418P	1 Solder Paste Syringe 1 Torch	1 Coil 1 Butane Refill
425P	2 Solder Paste Syringes 1 Torch	1 Butane Refill
426P	2 Solder Coils 1 Torch	1 Butane Refill

### Microtorch Butane Torch



At only 5-1/4" high with a 2500° flame, the **Microtorch** is ideal for all types of professional use. Refillable with premium grade butane (IBS No. 95007). A versatile and handy addition to any professional workshop.

IBS No.	Description	Qty
125738	Microtorch Butane Torch	1

### Industrial Butane Torch

Powerful, portable, refillable and anti-flare with a flame temperature of over 2500°F, the Industrial Butane Torch is ideal for automotive, plumbing, and professional repair shop use.


#### Functions & Uses:

- |                     |             |
|---------------------|-------------|
| Lead Gutters        | Loose Bolts |
| Toughen Metal       | Plumbing    |
| Stripping Paint     | Dry Cements |
| Automotive Repair   |             |
| Sweat Ftgs & Joints |             |
| Lay or Remove Tiles |             |



IBS No.	Description	Qty
125739	Industrial Butane Torch	1

### Dual Temp Electric Heat Gun



A general purpose heat gun that is ideal for most heating applications, including applying heat shrink tubing, stripping paint, thawing pipes and loosening floor tile.

- 2 temperature settings (750°F & 1000°F) for versatility & various applications.
- 4100 BTU output for removing multiple layers of paint.
- 1200 Watts make this a powerful heat gun.
- Measures 16.5 x 9.8 x 17 inches

IBS No.	Description
141096	Dual Temp Electric Heat Gun
141305	Concentrator Nozzle
141306	Flare Nozzle
141307	Glass Protector Nozzle

### Wire / Cable Cutter



- Stainless steel blades cut electrical cable safely.
- Ergonomic handle for comfort.
- Spring keeps handles open when in use.
- Locking device keeps blades closed when not in use.

**WARNING:**  
**DO NOT USE ON ELECTRICAL CIRCUITS!**

IBS No.	Description	Qty
99169	James Morton Wire Cable Cutter	1

ELECTRICAL



### Wire Crimp Tool (T03)



A versatile, heavy-duty tool, made of .140" high-strength, heat-treated carbon steel. It is lightweight without sacrificing strength. It handles a variety of terminal and connector styles, including FLAGS, closed-end connectors, crimp sleeves and standard parts, insulated and non-insulated, over a broad range of 26-6 AWG.

- Anvil Type wire cutter.
- Crimp dies for #26-10 AWG insulated terminals, connectors, and closed-end connectors.
- Cuts & re-threads 4-40, 6-32, 8-32, 10-24, and 10-32 machine screws.
- Crimp die for #12-6 AWG non-insulated terminals, connectors, FLAGS, quick-slides, crimp sleeves and high temperature terminals.
- Crimp die for insulated terminals and butt connectors, wire sizes #8-6 AWG.
- Crimp die for #26-14 AWG non-insulated terminals, connectors, FLAGS, quick-slides and crimp sleeves.
- Wire-stripping stations.
- Strip length guide.
- Textured, cushioned grips.

IBS No.	Description	Qty
TH450	Wire Crimp Tool	1

### Ratcheting Wire Terminal Crimper



- Ratcheting mechanism with adjustable clamping force allows for precise, repeatable crimps.
- Compound action design puts more crimping power into each squeeze.
- Double crimping die creates a secure crimp that resists pull-out.
- Ratcheting function allows you to secure a wire connector in the die before inserting the stripped wire into the barrel.
- Quick release lever frees the crimper jaws in any position and when double crimp is complete, acts as a built-in safety measure that can open the handles whenever tool is jammed or stuck.
- Steel jaw contains color-coded wire size markings for red (22-18 AWG), blue (16-14 AWG), and yellow (12-10 AWG) terminals.
- Ergonomic biomaterial handles offer a comfortable, secure grip.

IBS No.	Description	Qty
11477	Ratcheting Wire Terminal Crimper	1

### Ratcheting Crimp Tool Sets (T03)

Available with 4 Additional Dies for Crimping A Variety of Terminals with One Tool!



- 4 Crimp Nests: 8 AWG Red; 12-10 AWG Yellow; 16-14 AWG Blue; 22-18 AWG Red
- Mating mechanism prevents jaws from slipping or misalignment.
- Long handles make it easier to crimp - Less force required.
- Easy-to-use and understand release mechanism.
- Ergonomic design to initiate the crimp process.



#### Dies Available:

- For open barrel terminals: 20GA thru 10GA
- For Insulated Closed End Connectors
- For Double Crimp Insulated Terminals: 24GA thru 10GA
- For Insulated Flag Terminals

IBS No.	Description	Qty
B0050	Ratcheting Crimp Tool	1
B0051	Ratcheting Crimp Tool & Dies Kit	1
B0052	Ratcheting Crimp Tool Case & Dies — No Tools	1
B0053	Ratcheting Crimp Tool Die for 22-10GA Insulated Closed End Term	1
B0054	Ratcheting Crimp Tool Die with Locator for 20-10 GA Open Barrel Connectors	1
B0055	Ratcheting Crimp Tool Die for 22-14GA Insulated Flag Terminals	1
B0056	Ratcheting Crimp Tool Die for 26-10GA Double Grip Insulated Terminals	1

### Easy Stripper

#### Self-Adjusting Wire Stripper

- Easy stripping - Automatically self-adjusts to strip solid or stranded 10-26 gauge wires.
- Easy cutting - Cuts through 10-22 gauge terminals.
- Easy crimping - Crimps 10-22 gauge terminals.
- Easy Use - Easily handles all wire from 10-26 gauge including solid and stranded wires.



IBS No.	Description	Qty
PM014	Easy Stripper	1

### Battery Terminal Cleaner

IBS No. 74103



**Battery Terminal Cleaner** removes corrosion from all battery parts and quickly identifies leaks. Color indicator turns red in the presence of acid. When neutralizing, color indicator shows yellow. Regular use increases battery performance and life expectancy.

- **Improves conductivity** — Seals out air to prevent corrosion that robs battery power and life.
- **Attacks and destroys corrosion** — Quick acting cleaner removes stubborn corrosion.
- **Extends battery life** — Seals air and dirt out to protect battery against corrosion build-up and battery voltage leakage.
- **No mess application**
- **Fast-acting formula** makes clean up quick.

### Battery Terminal Protector

IBS No. 74109



A unique film designed to protect battery terminals from corrosion. Industrial battery terminal sealer and protector.

Extends battery life, allows for maximum flow.

- **Extends battery life** by preventing corrosion.
- **Improves electrical output** keeping connections clean and in direct contact with terminals.
- **Remains flexible** so it won't crack when installing, removing or tightening connections.
- Dielectric strength: 30,000 volts.
- **USE ON:** Battery posts, terminals, in automobiles, trucks, power equipment, boats, handling equipment.

### Safety Solvent IV Degreaser

IBS No. 74156



- **Penetrates and removes** dirt, grease, oil, grime and varnish deposits.
- Safe on all metals, electrical, equipment wiring, and painted surfaces.
- Non Corrosive and non-staining.
- Removes tar, adhesive marks, crayon, lipstick, chewing gum, ink, fresh paint & spots from upholstery, rugs and clothing.

### 4 Way Plus

IBS No. 74147



- **Dries wet electrical systems and ignitions** to end system delays due to moisture.
- Penetrates and loosens frozen nuts & bolts for faster and easier removal.
- Excellent all-purpose lubricant.
- Valve sprays either stream or mist for all your varied needs.
- Provides moisture barrier — Excellent for use on electrical equipment.
- Stops squeaks and provides permanent protection against metal-to-metal wear.





# IBS, INCORPORATED

## Chemicals S04

E  
L  
E  
C  
T  
R  
I  
C  
A  
L



### Contact and Circuit Board Cleaner

#### IBS No. 74128

- **Cleans oil**, grease, dirt, moisture and condensation from circuit boards, precision instruments, oxygen equipment, controls, switches, motors and film.
- **Removes carbon** and other harmful deposits on all electrical contacts.
- **Restores** full current flow.



### Undercoat

#### IBS No. 74127

- **Protects and seals** body undersides on trucks, buses, and automobiles.
- **Protects drums, tanks** and other outside storage vessels.
- **Seals out moisture.**
- **Absorbs shock and noise**, eliminating rattles and squeaks.



### Dielectric Grease (S08)

#### IBS No. 37535 - 3 oz. tube

Provides a moisture-proof barrier that lubricates and protects electrical equipment from salt, dirt and corrosion. High dielectric strength. Good thermal, oxidation, and chemical stability.